
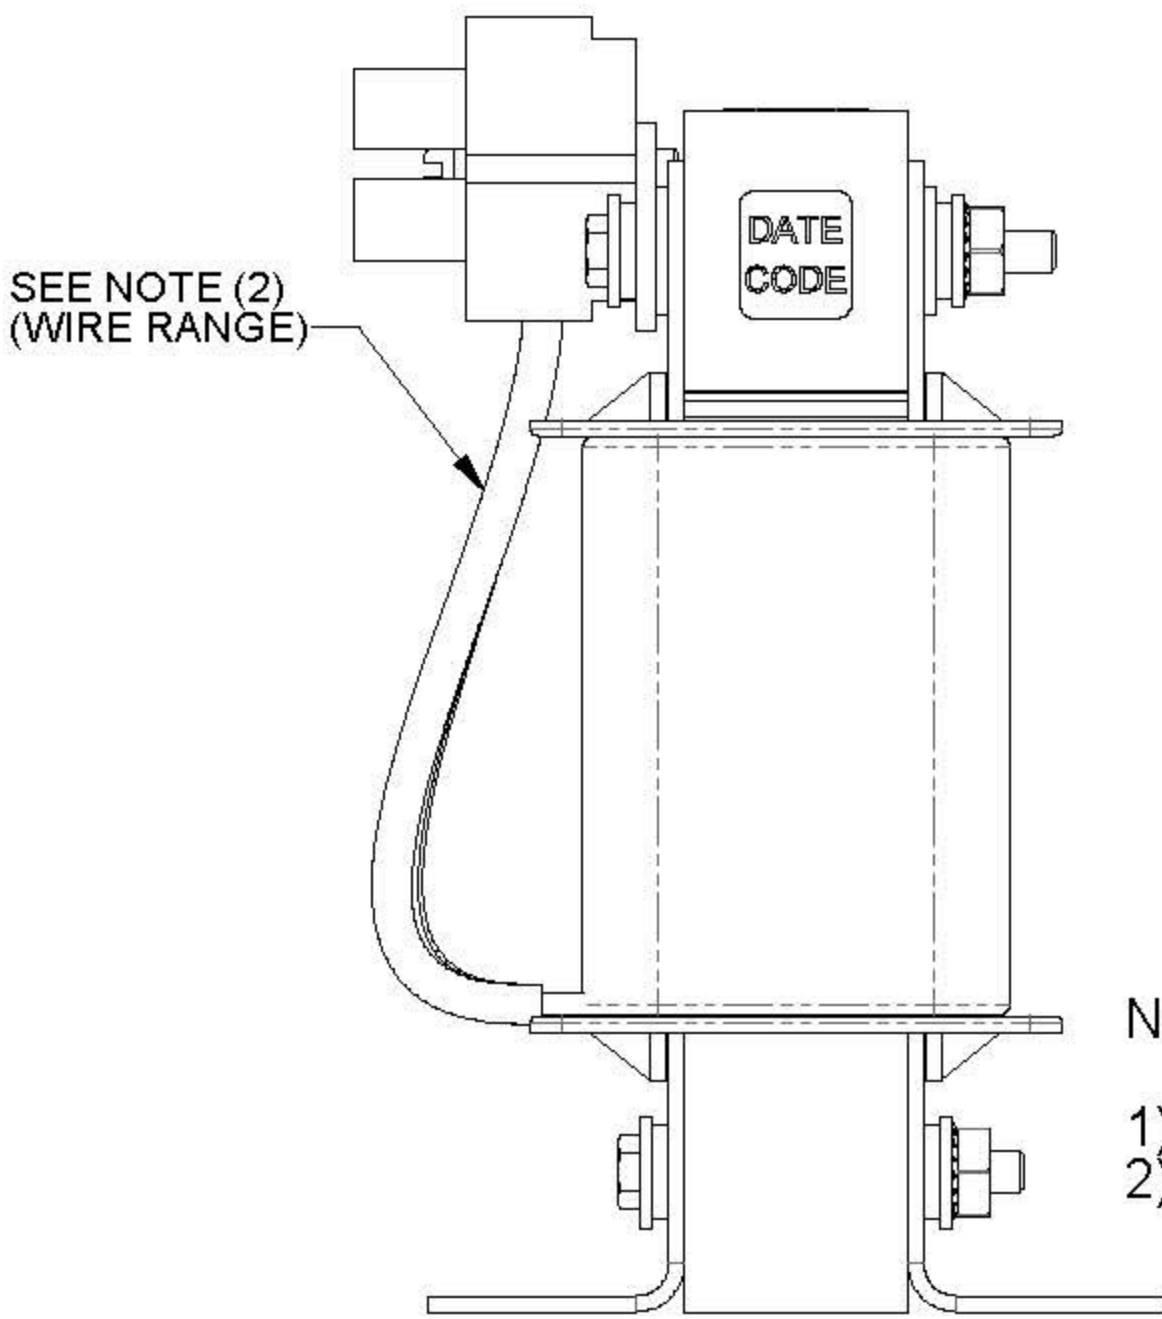
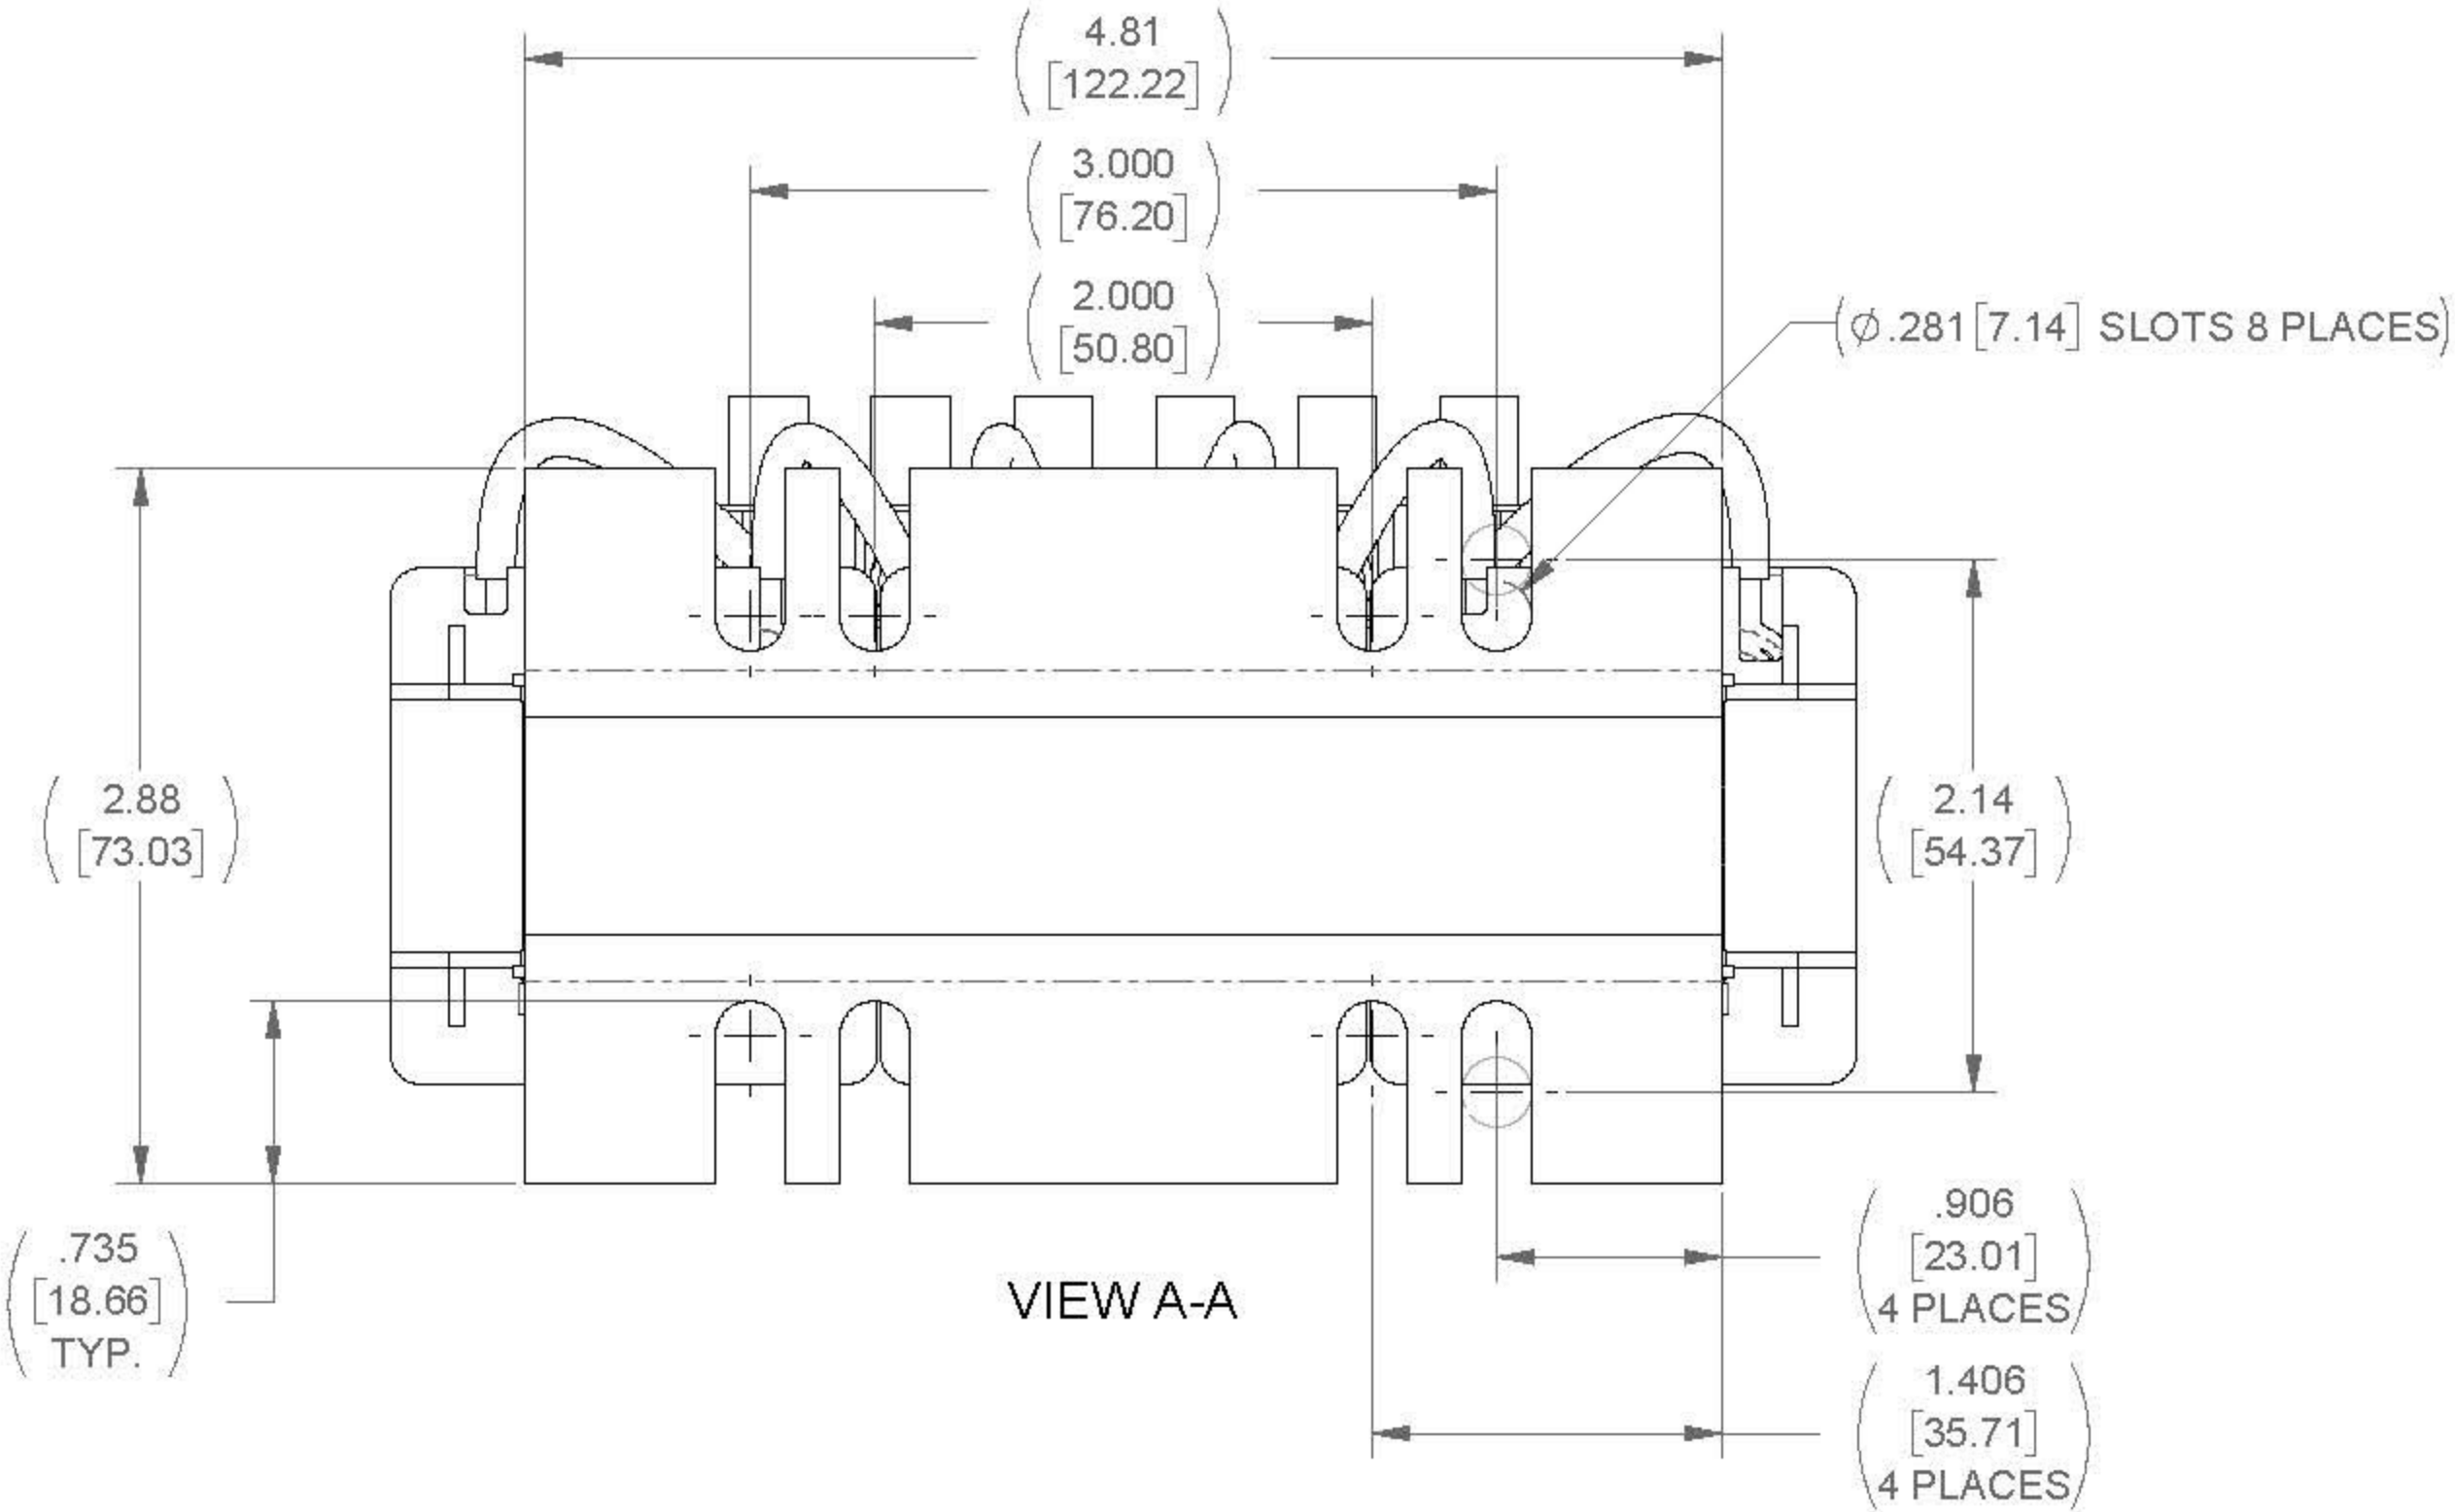
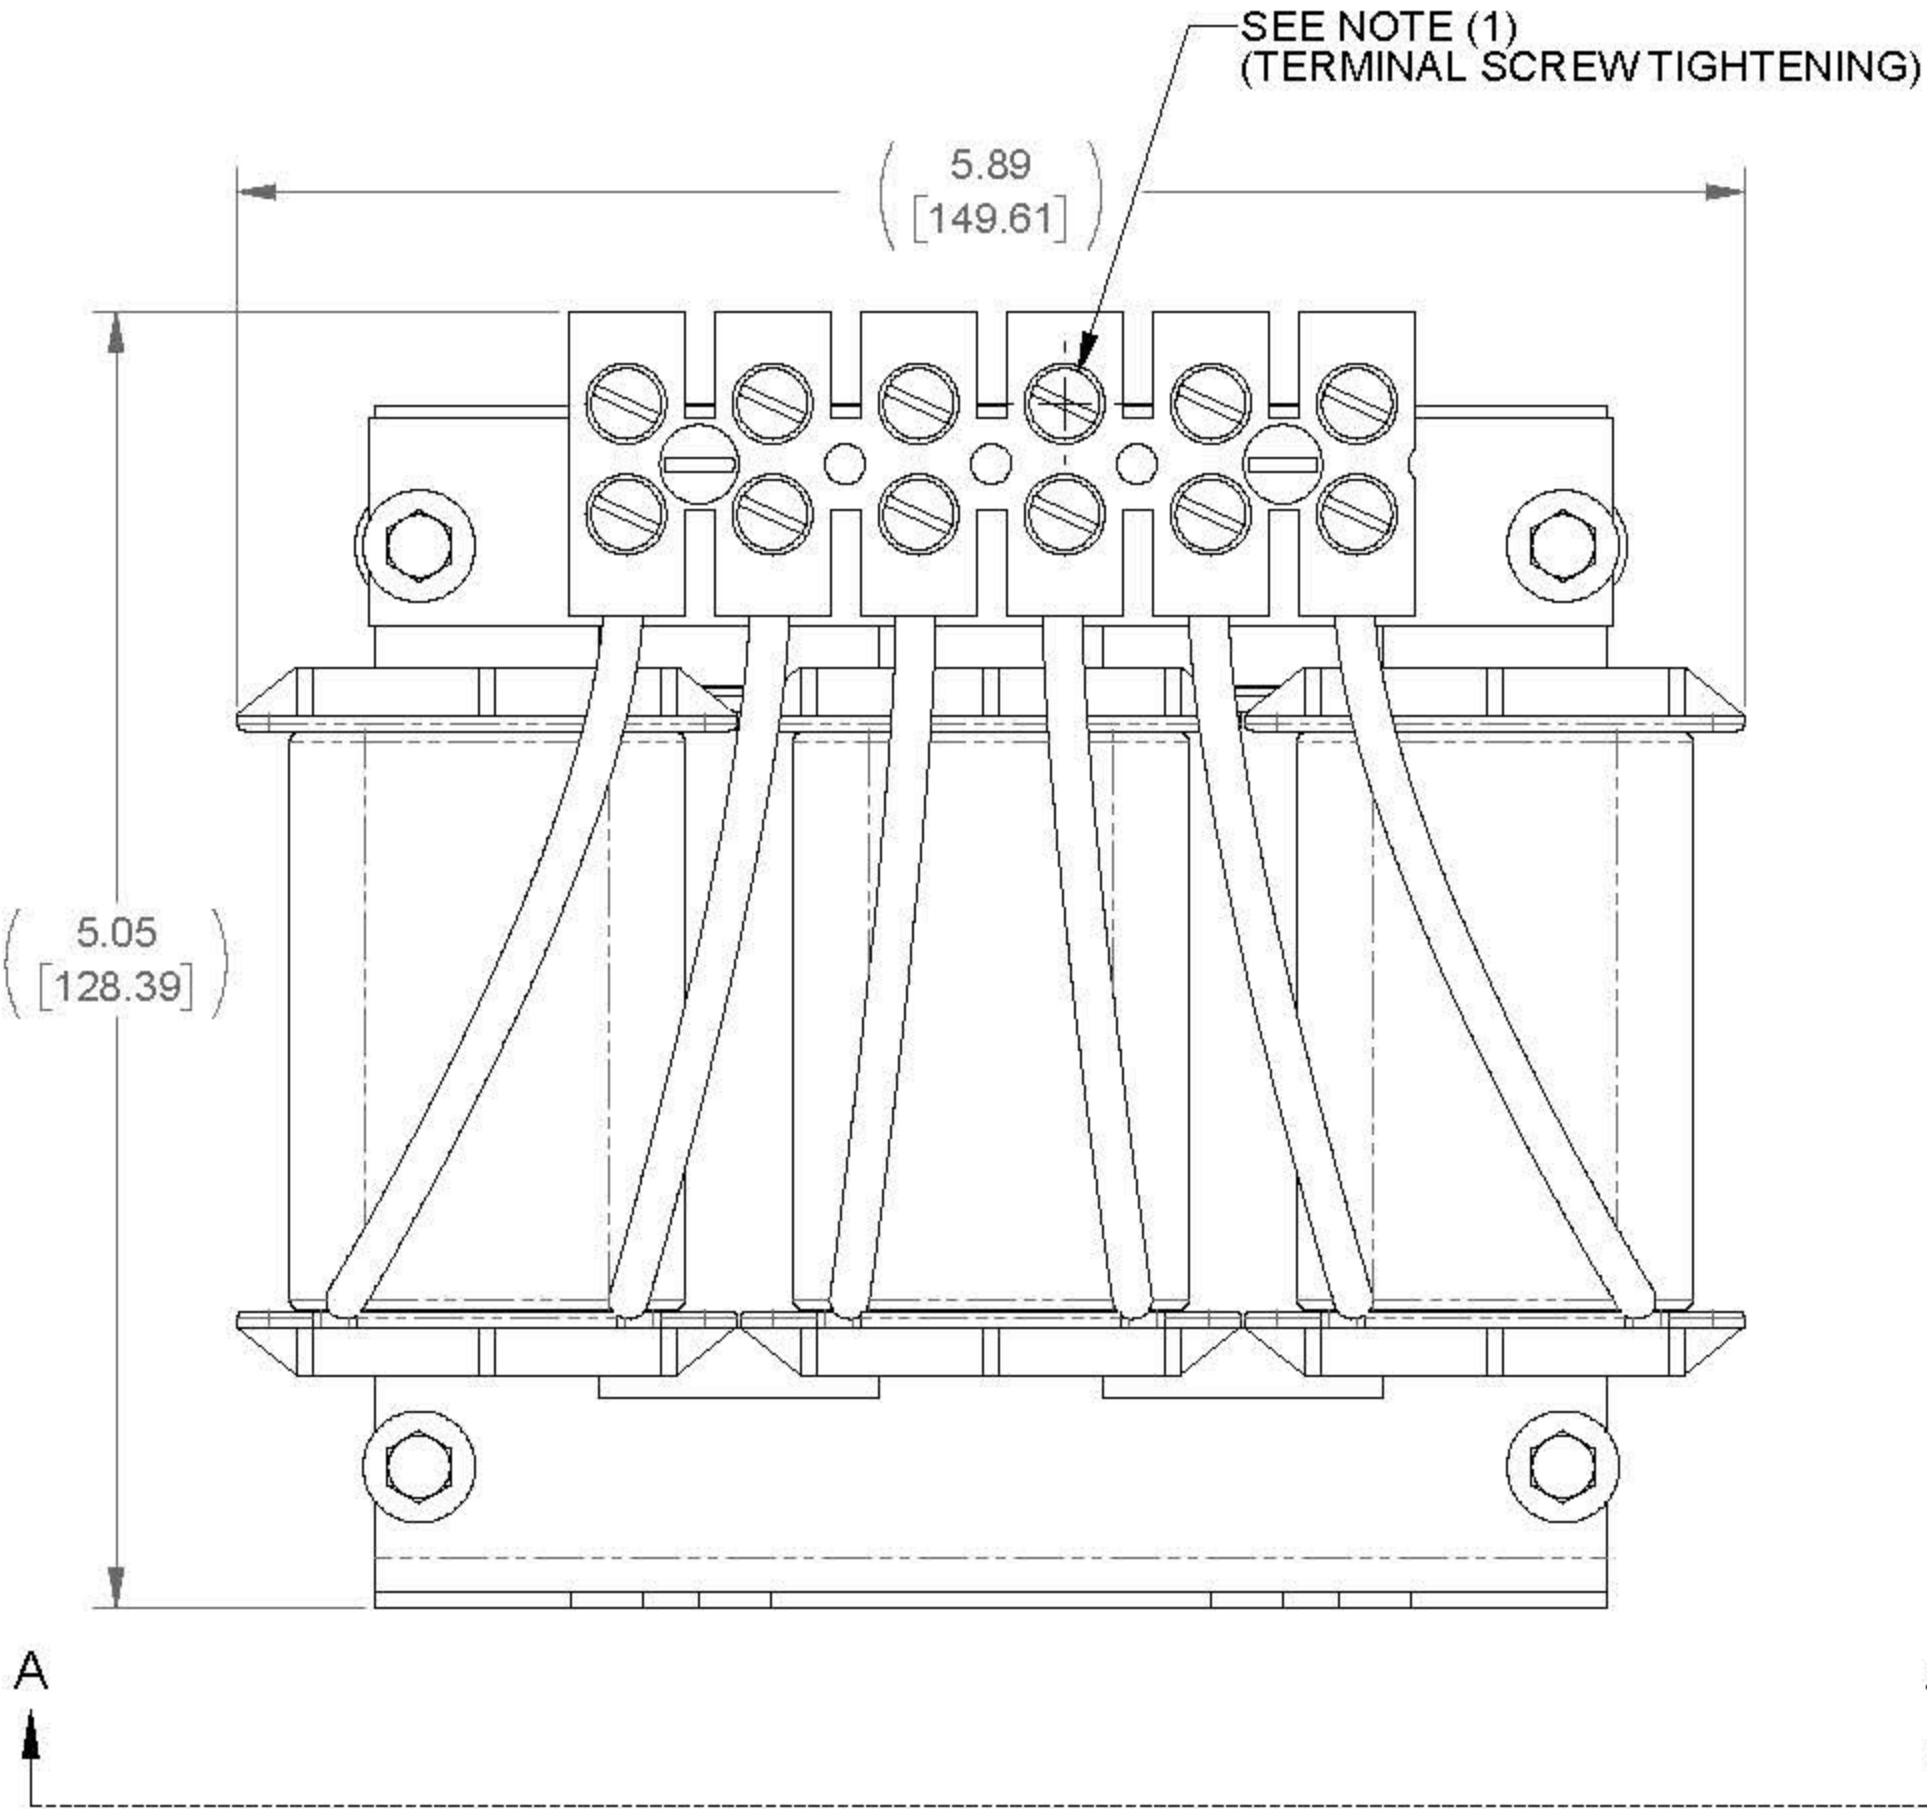


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
10	2.5 mH	31

ECO No	DESCRIPTION	REV BY	DATE
M8322	REDRAW IN SOLIDWORKS	JP	12/20/12

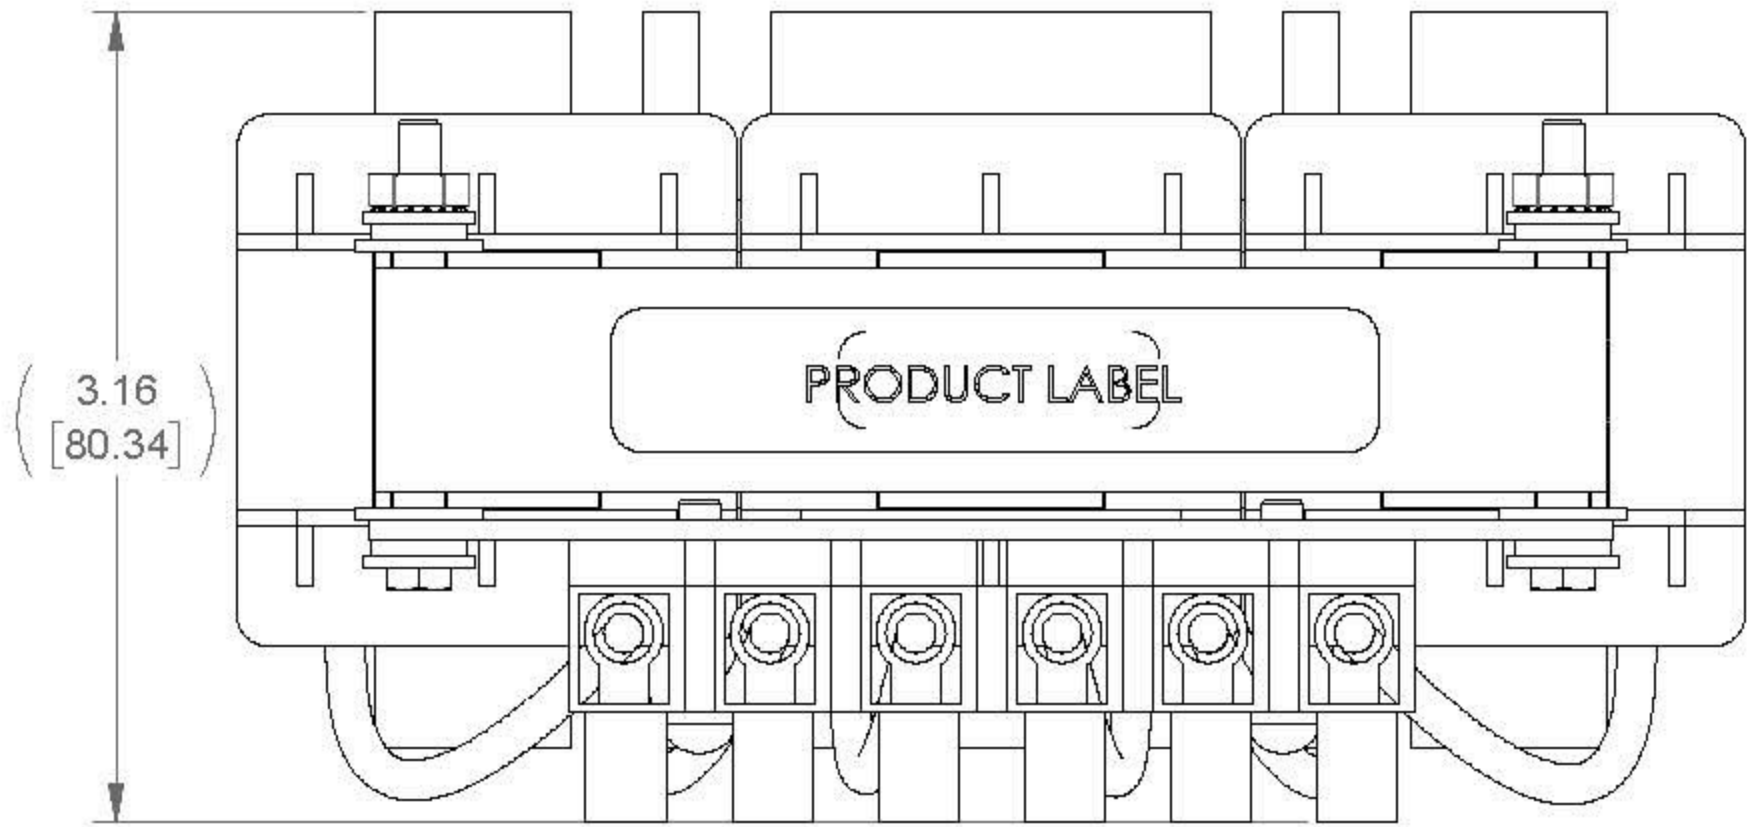

- NOTES:
- 1) TERMINAL SCREW TIGHTENING TORQUE: 16 in-lbs MAX
 - 2) WIRE RANGE: 14 - 6

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: $\pm 1^\circ$ 1 PLACE .X: $\pm .1$ [2.5] 2 PLACE .XX: $\pm .03$ [0.76] 3 PLACE .XXX: $\pm .010$ [0.254]		MTE AN RL POWER ELECTRONICS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		3 PHASE REACTOR	
		DRAWN CEL	DATE 07/18/96		
		CHECKED TM	DATE 12/27/12		
		APPROVED TM	DATE 12/27/12		
		SIZE D	DWG No. CD RL-01202	REV 14	
		SCALE 4:3	SHEET 1 OF 1		