



WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
2	11mH	14.3


ECO No	DESCRIPTION	REV BY	DATE
M8128	REDRAW IN SOLIDWORKS	JP	08/07/12

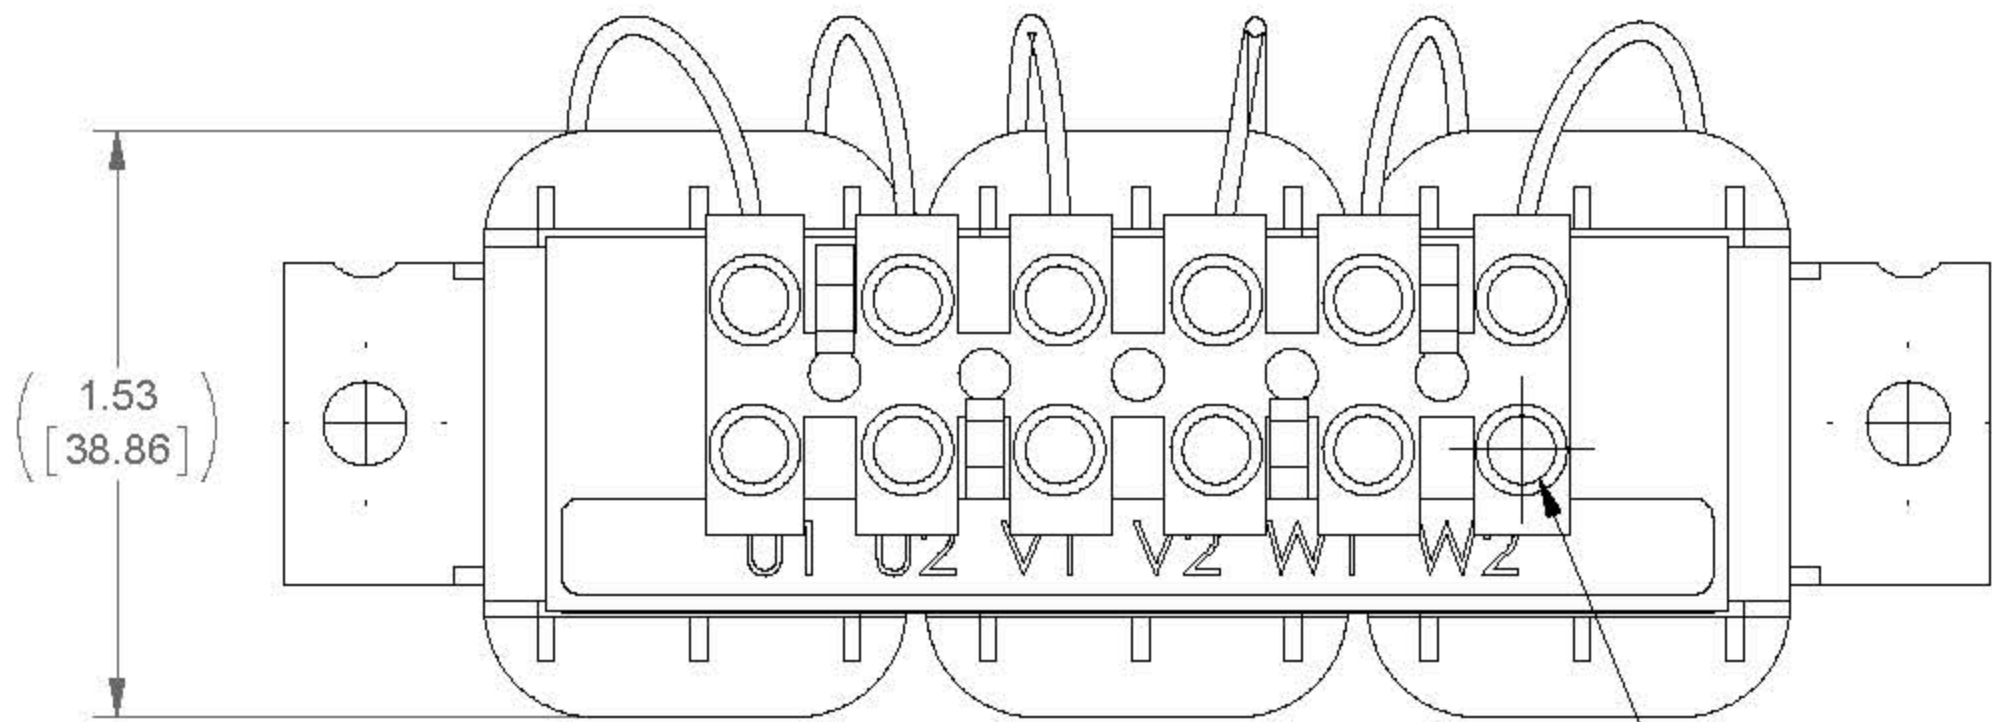

SEE NOTE (1)
(TERMINAL SCREW TIGHTENING)

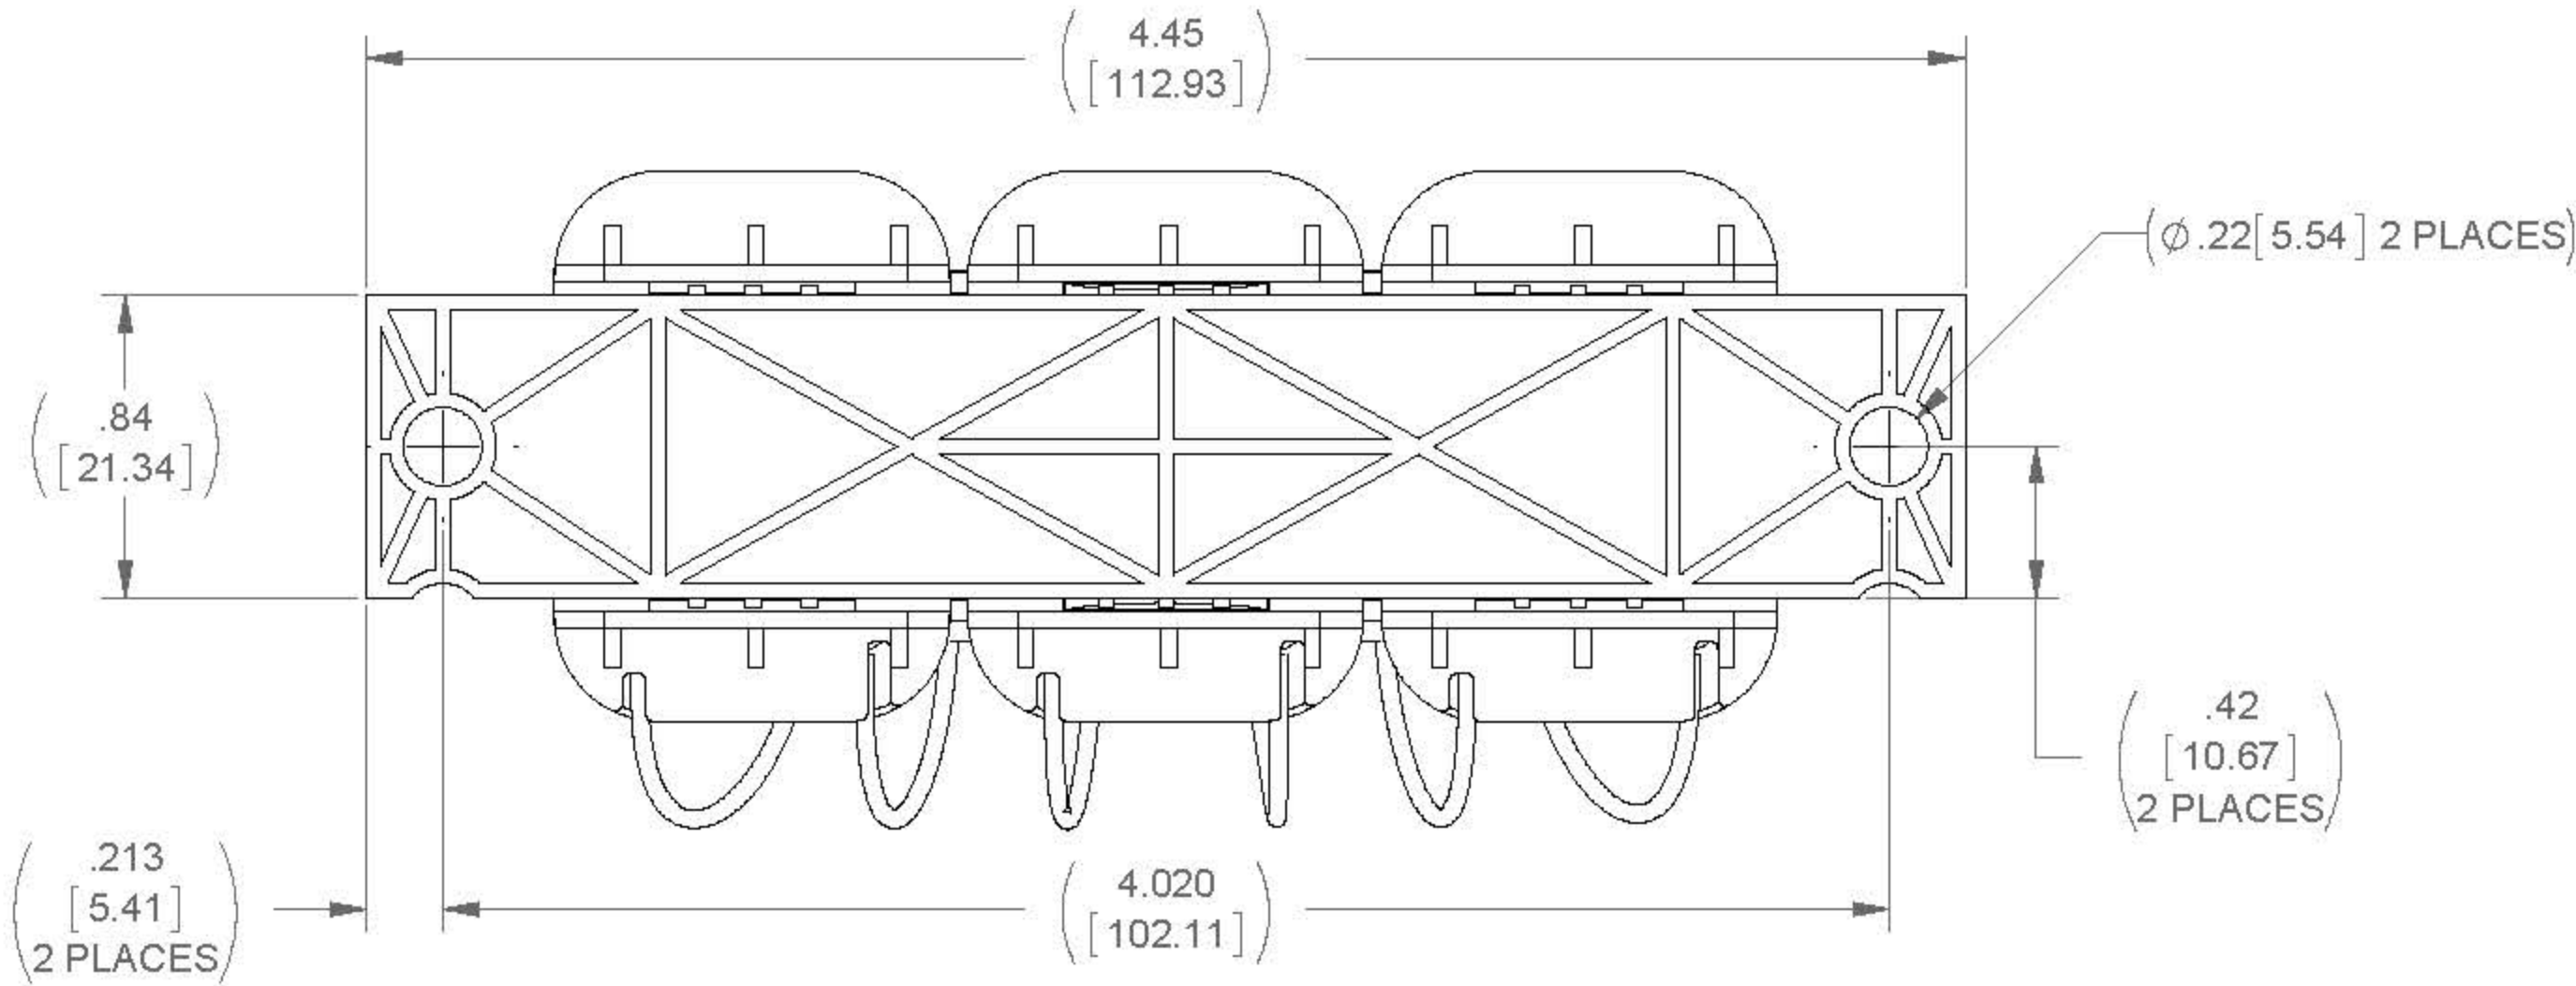


VIEW A-A

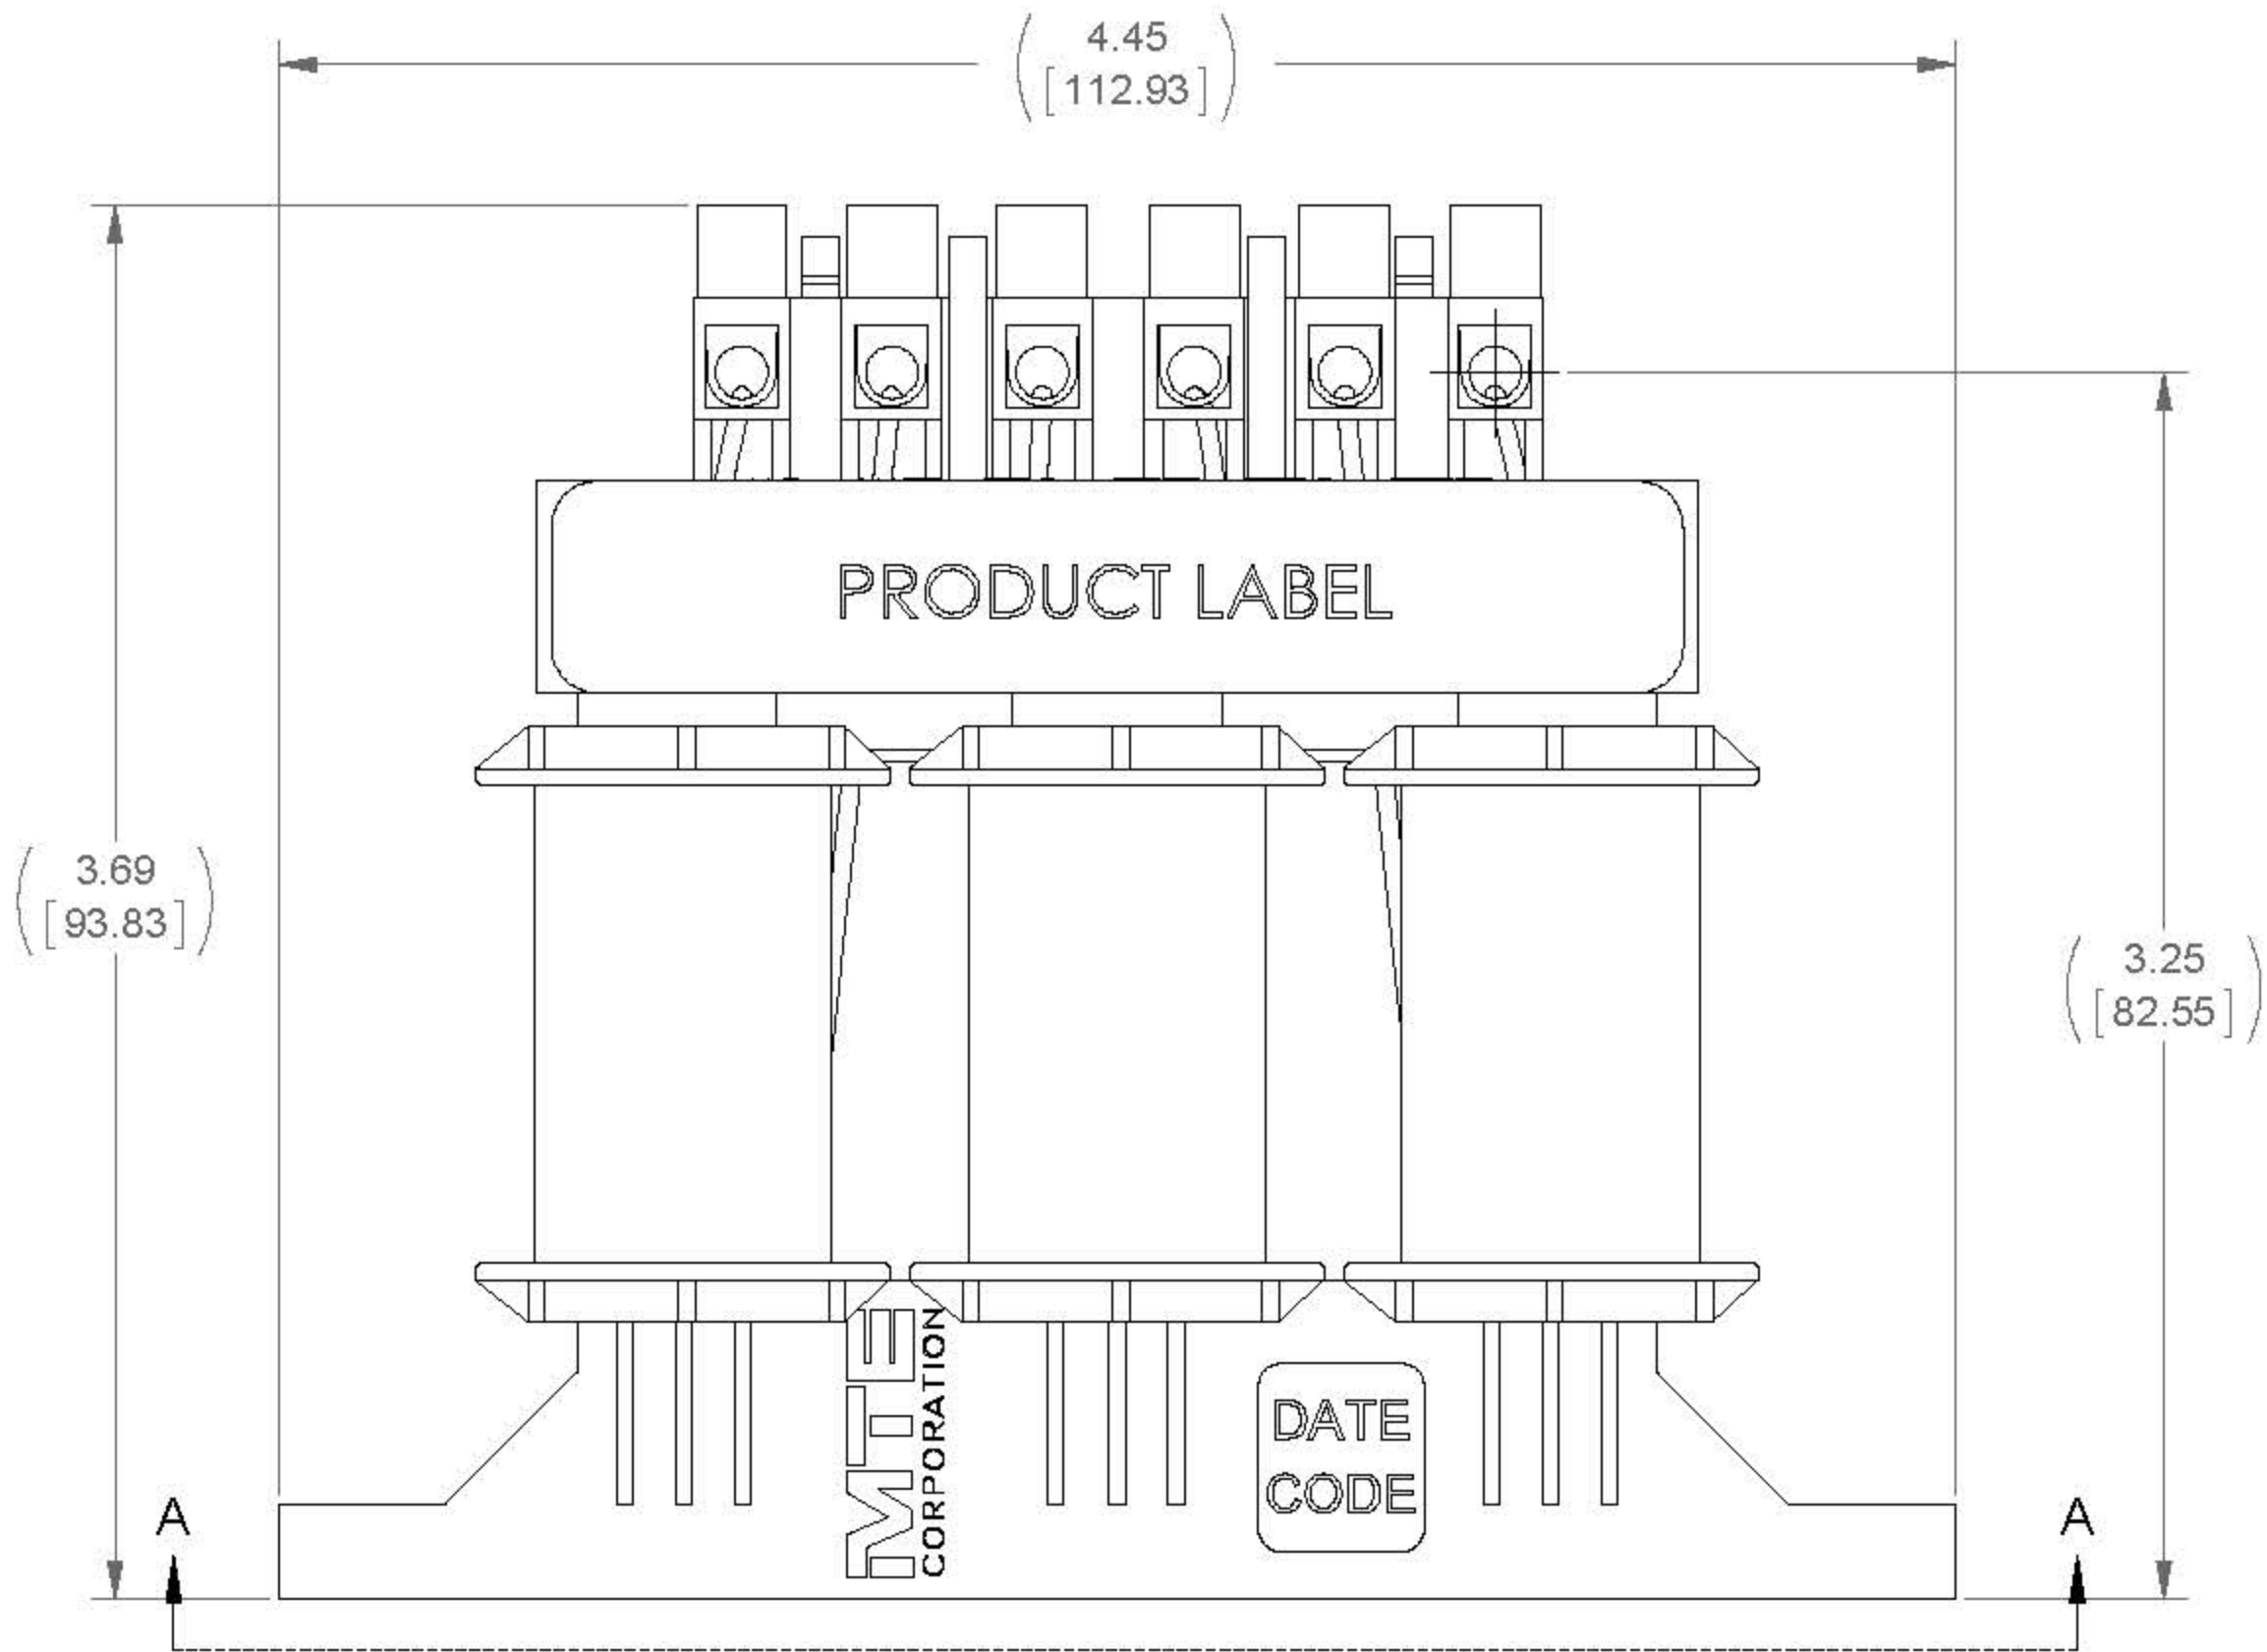

PRODUCT LABEL

DATE
CODE

MTE
CORPORATION

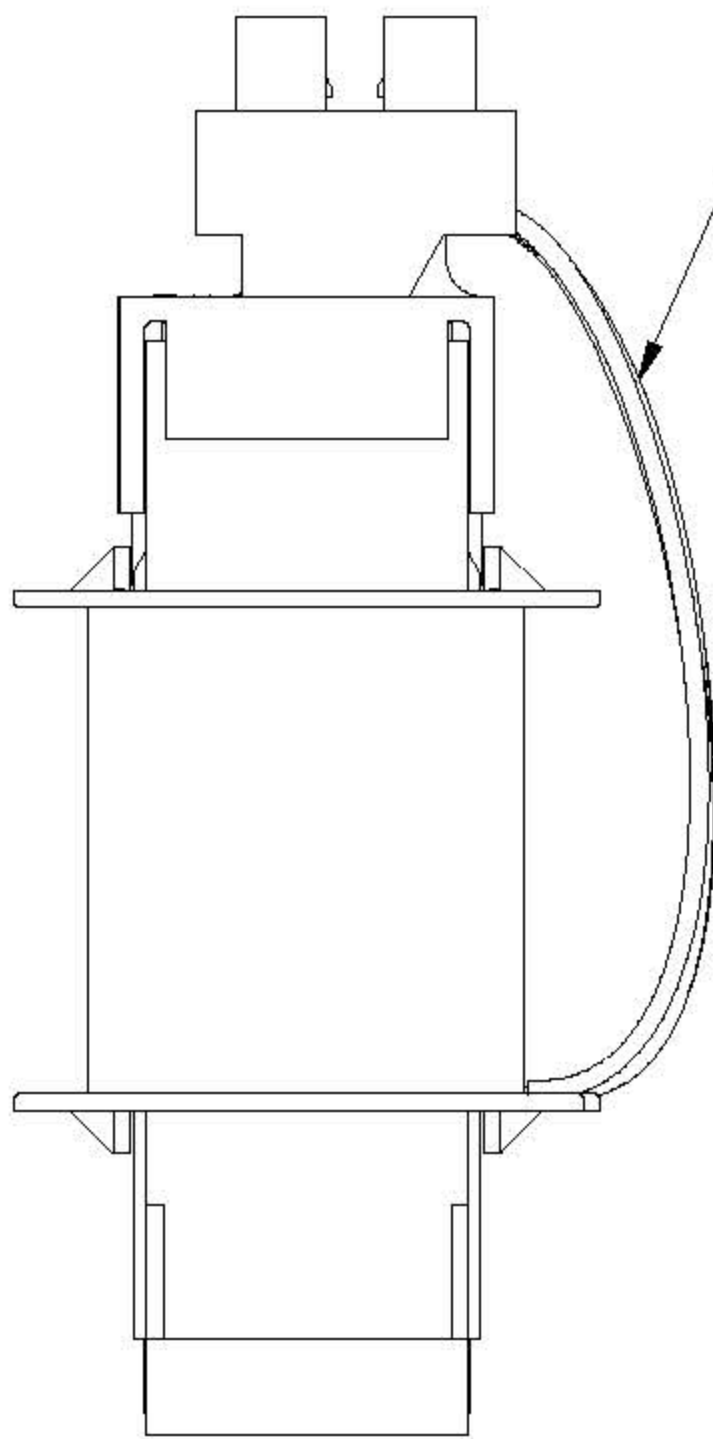

SEE NOTE (2)
(WIRE RANGE)

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE; 4.5 in-lb MAX.
2. WIRE RANGE: 22-10 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		MTE AN BL POWER ELECTRONICS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		SNAP CHANNEL REACTOR	
		DRAWN JP	DATE 07/31/12		
		CHECKED JH	DATE 08/07/12		
		APPROVED JH	DATE 08/07/12		
		SIZE D	DWG No. CD RLW-02P103	REV 05	
		SCALE 2:1		SHEET 1 OF 1	