
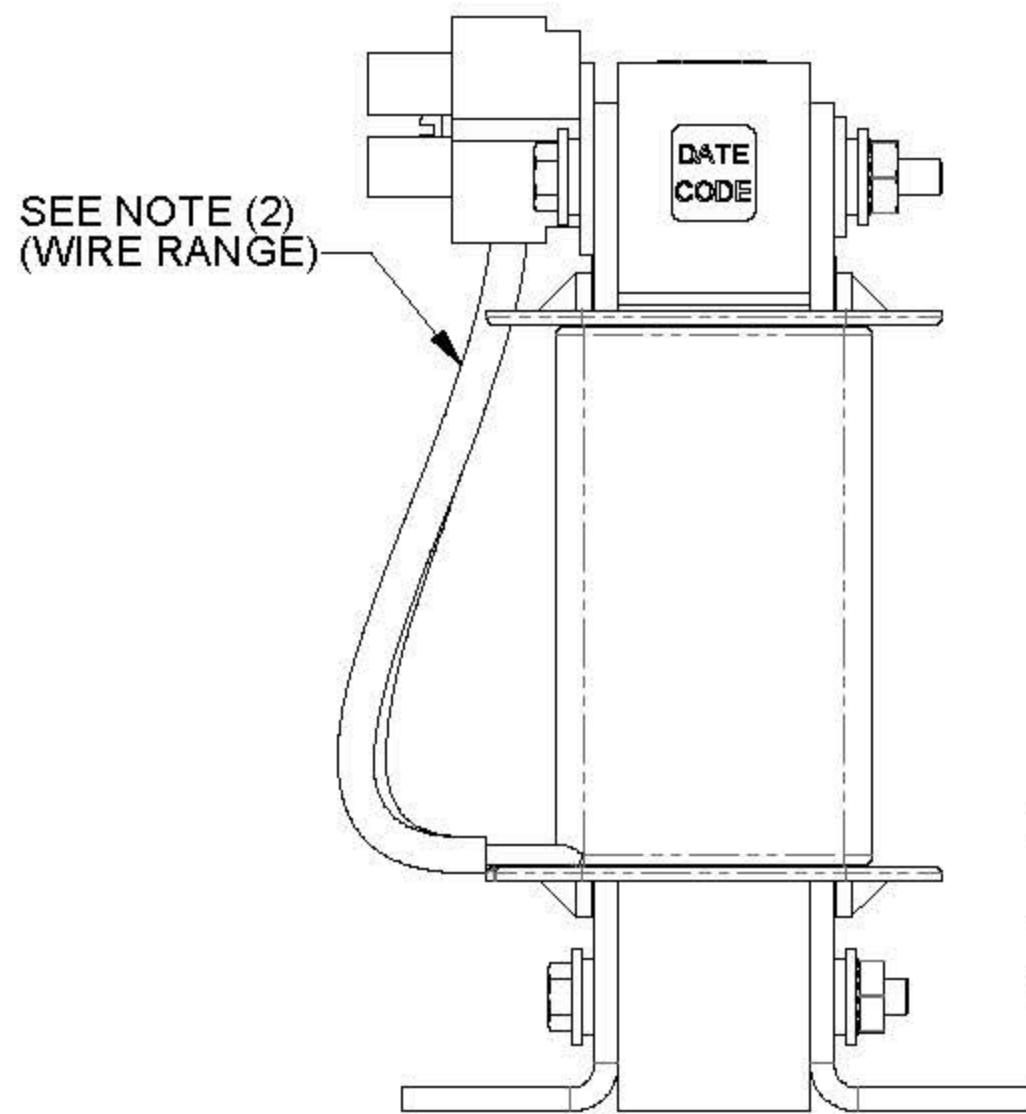
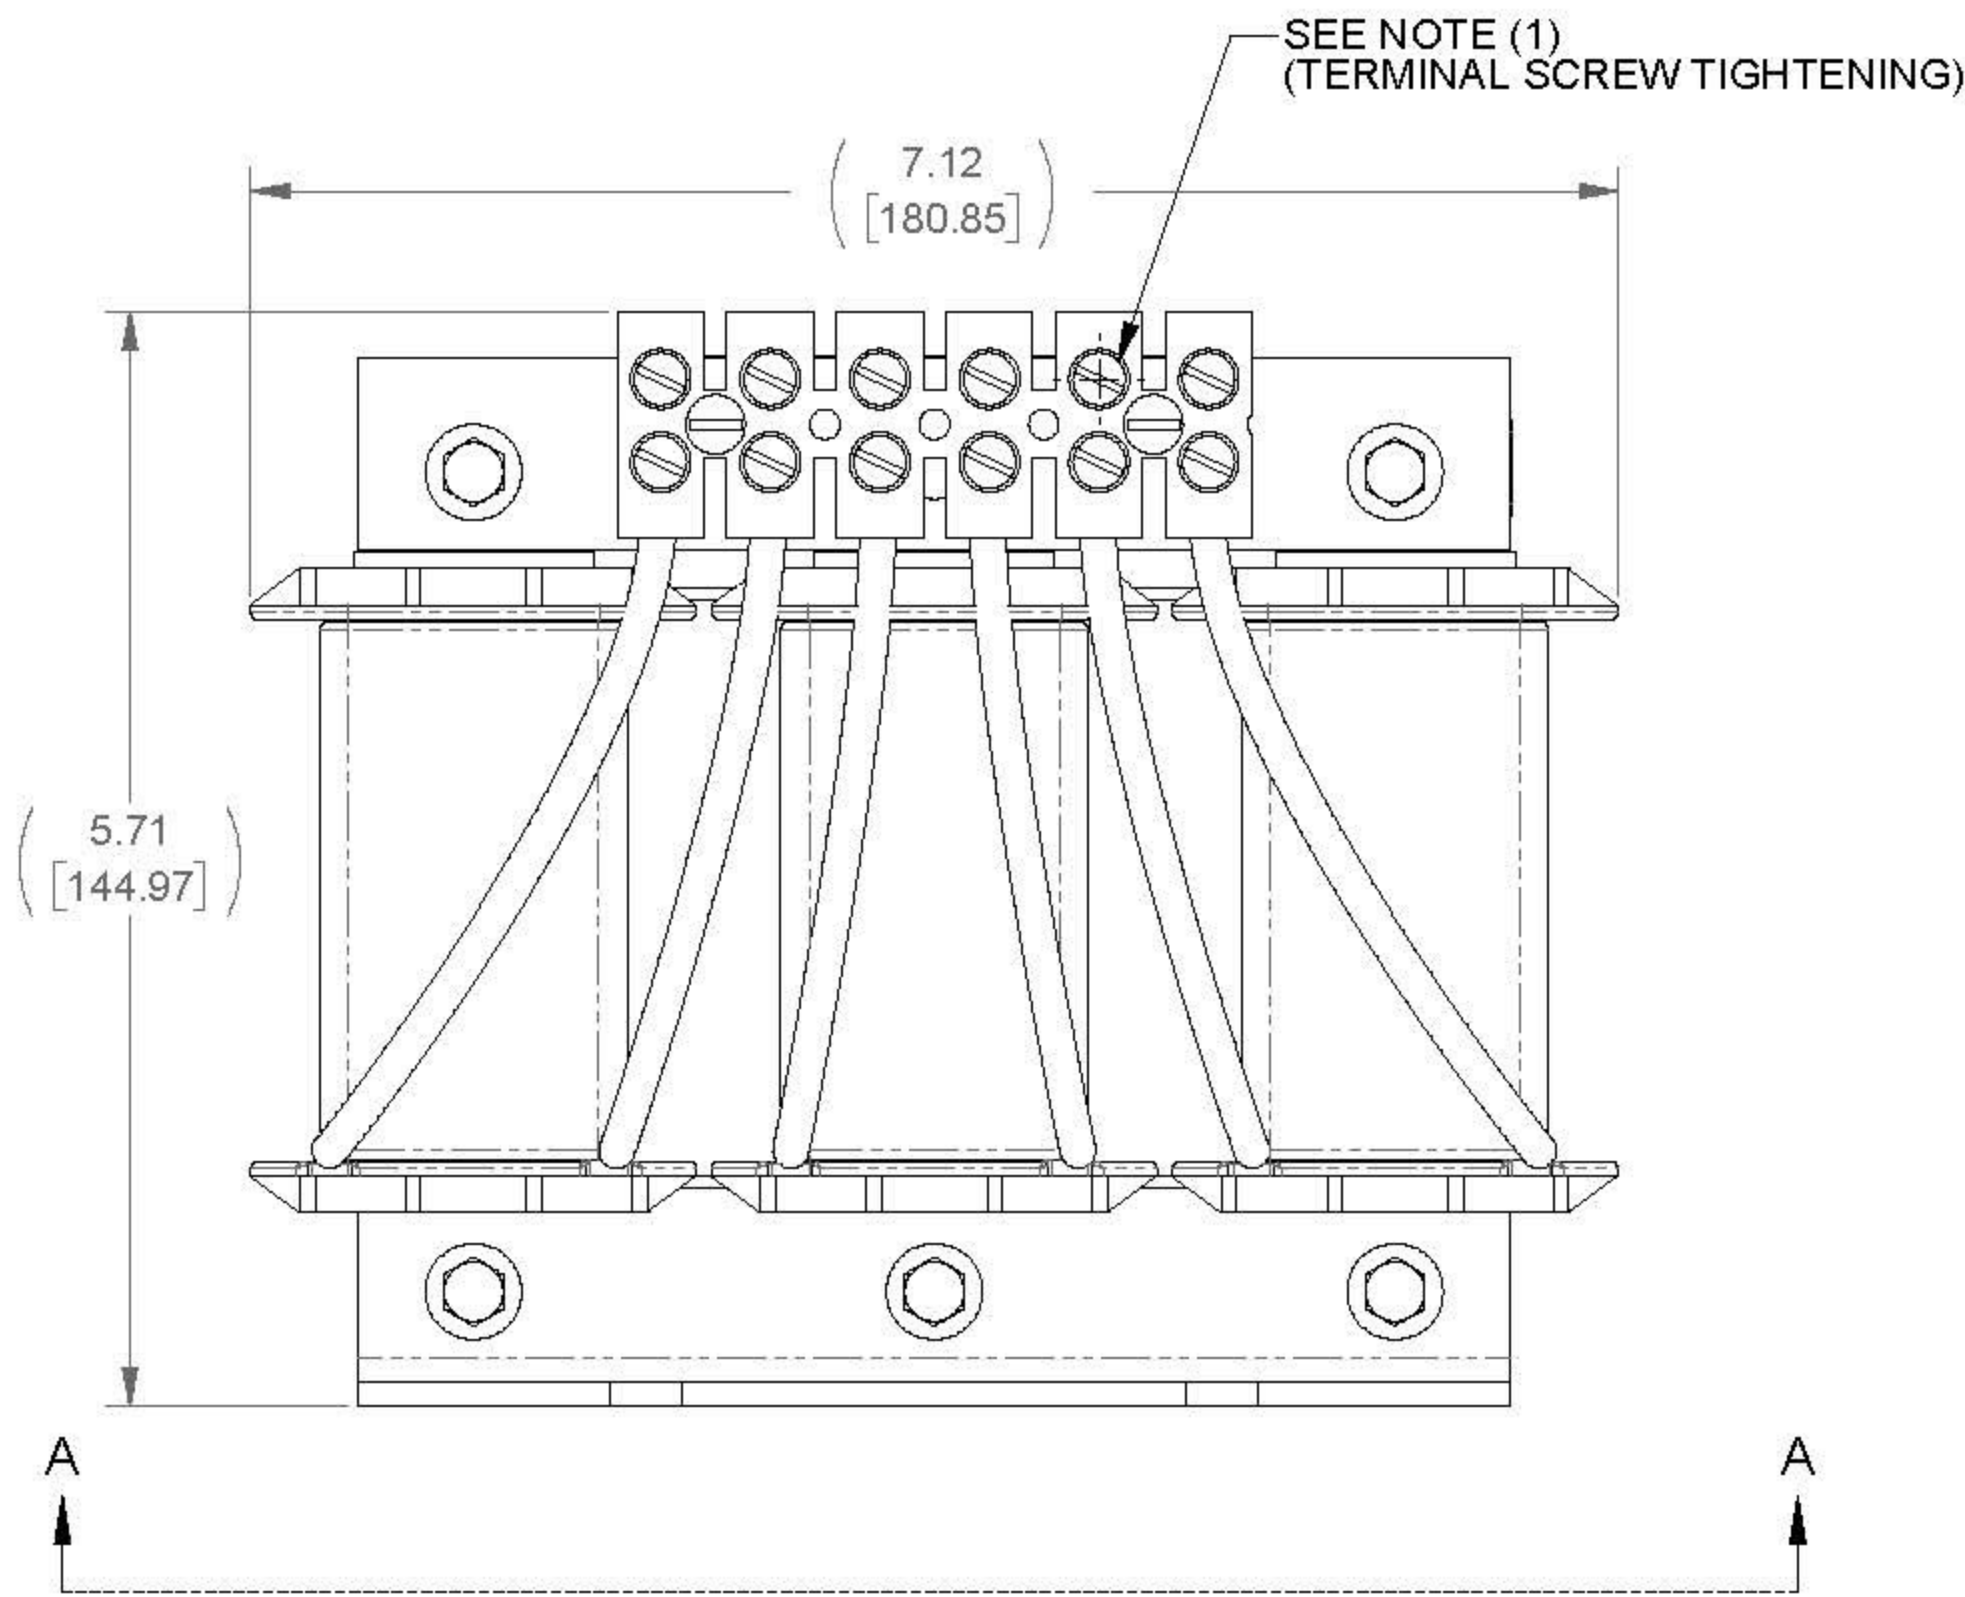
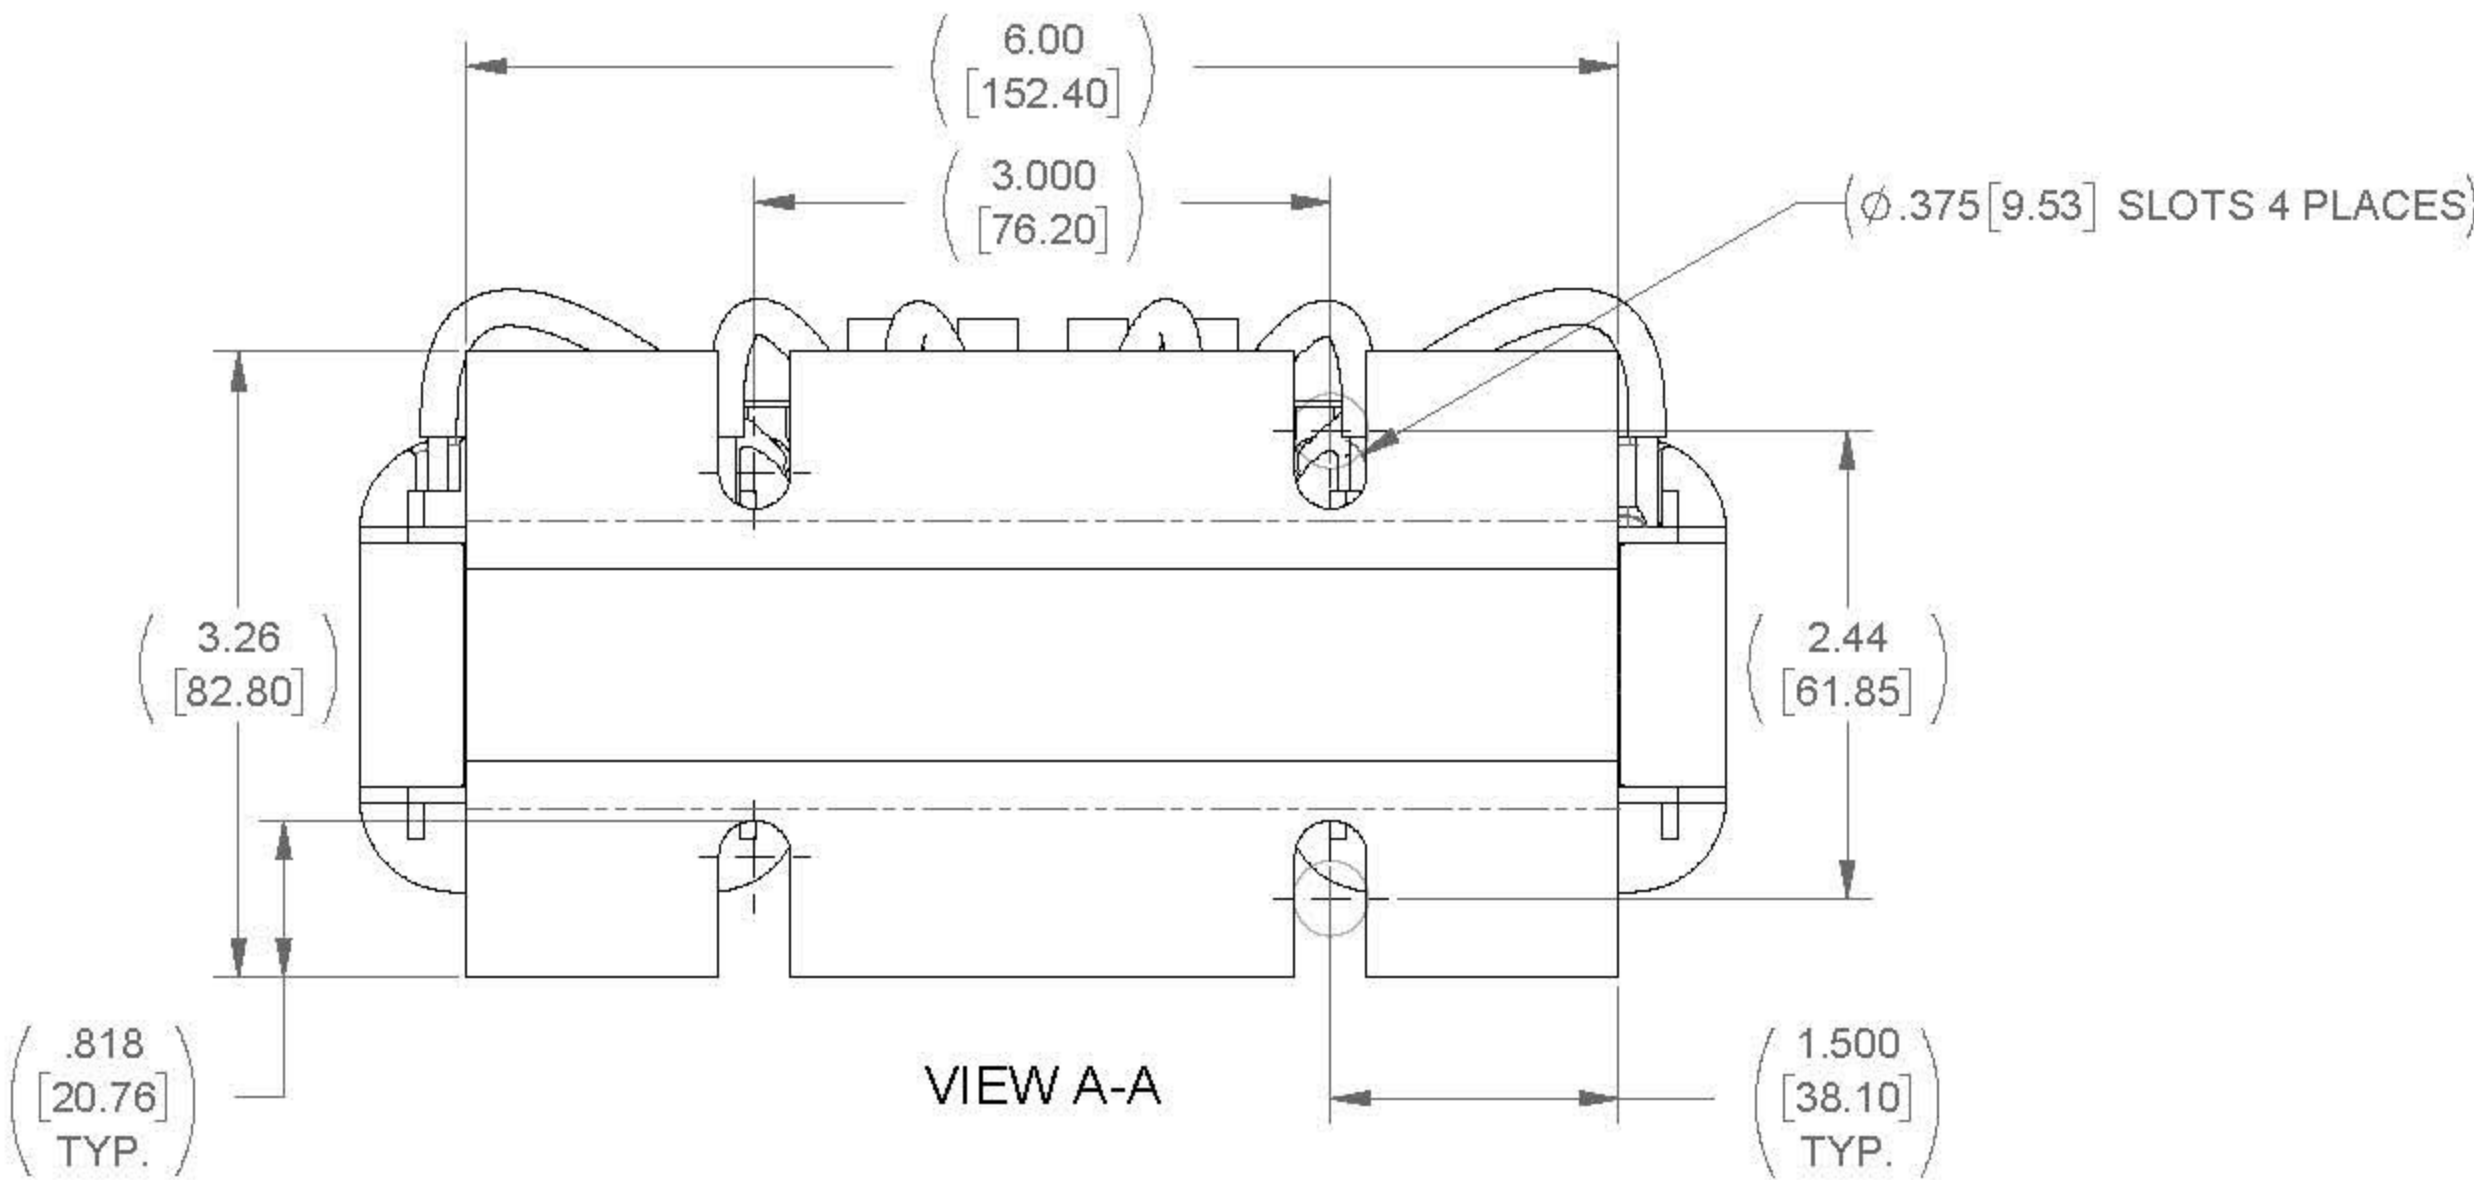


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
11	0.5 mH	48

ECO No	DESCRIPTION	REV BY	DATE
M8353	REDRAW IN SOLIDWORKS	JP	01/11/13

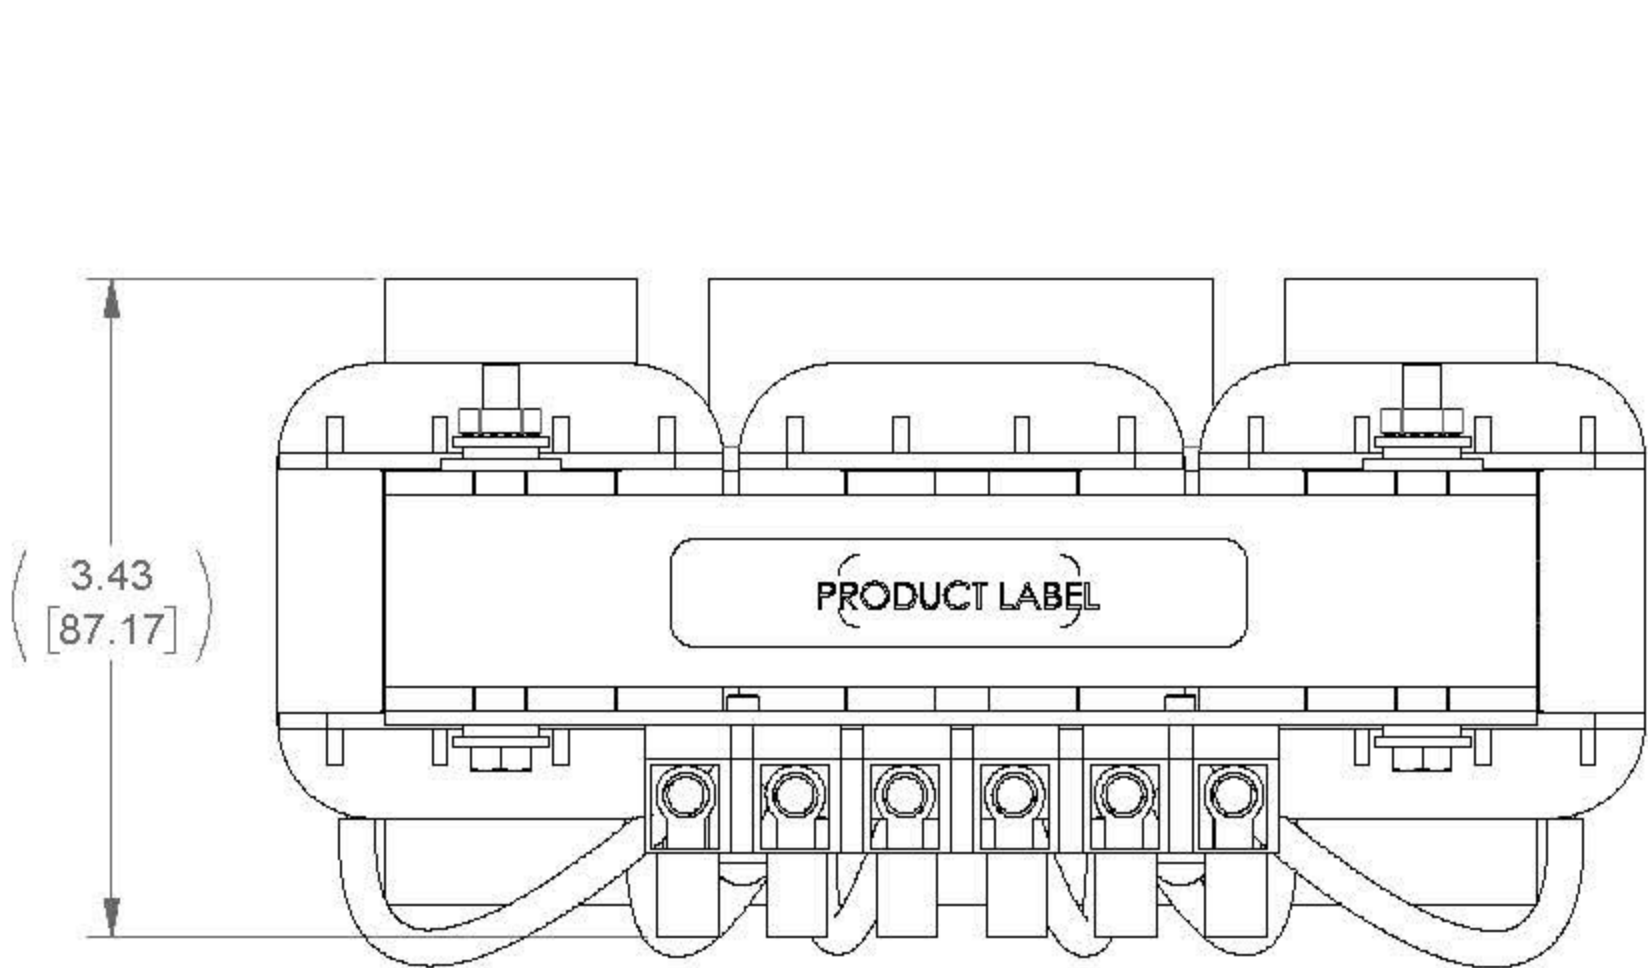

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE: 16 in-lbs MAX
 2. WIRE RANGE: 14 - 4 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: $\pm 1^\circ$ 1 PLACE .X: $\pm .1$ [2.5] 2 PLACE .XX: $\pm .03$ [0.76] 3 PLACE .XXX: $\pm .010$ [0.254]		MTE AN MLL POWER ELECTRONICS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		3 PHASE REACTOR	
		DRAWN SJW	DATE 01/03/90		
		CHECKED TM	DATE 01/17/13		
		APPROVED TM	DATE 01/17/13		
		SIZE D	DWG No. CD RL-02501	REV 12	
		SCALE 1:1		SHEET 1 OF 1	