
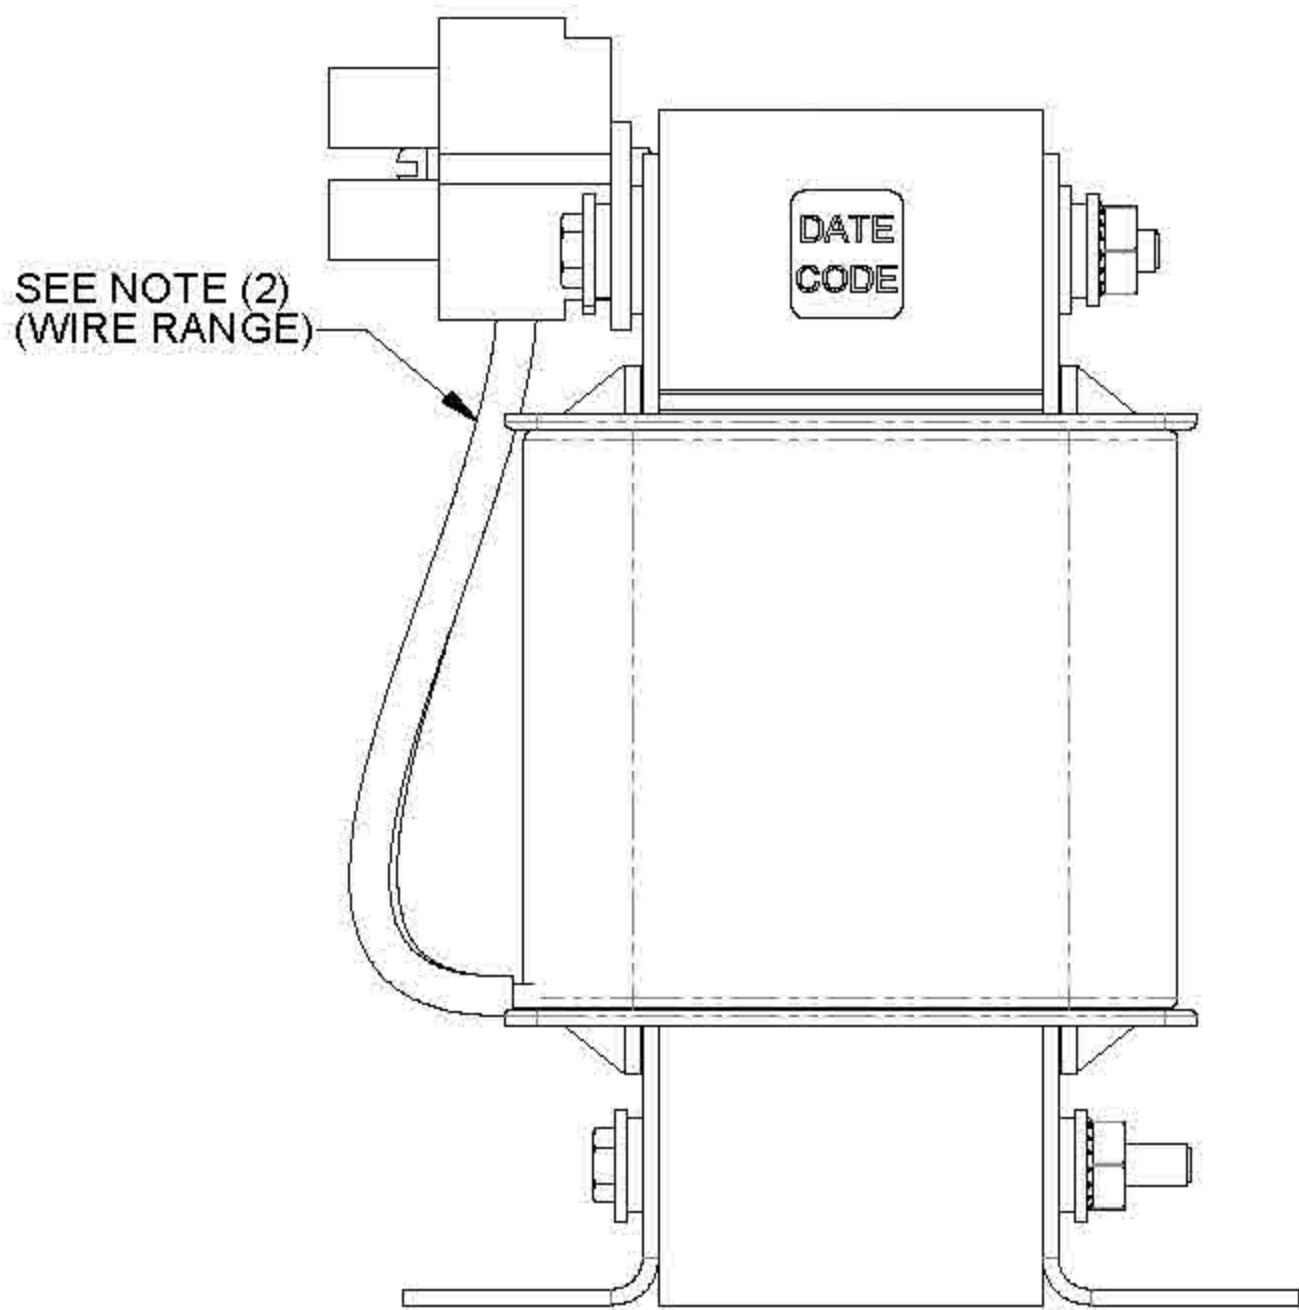
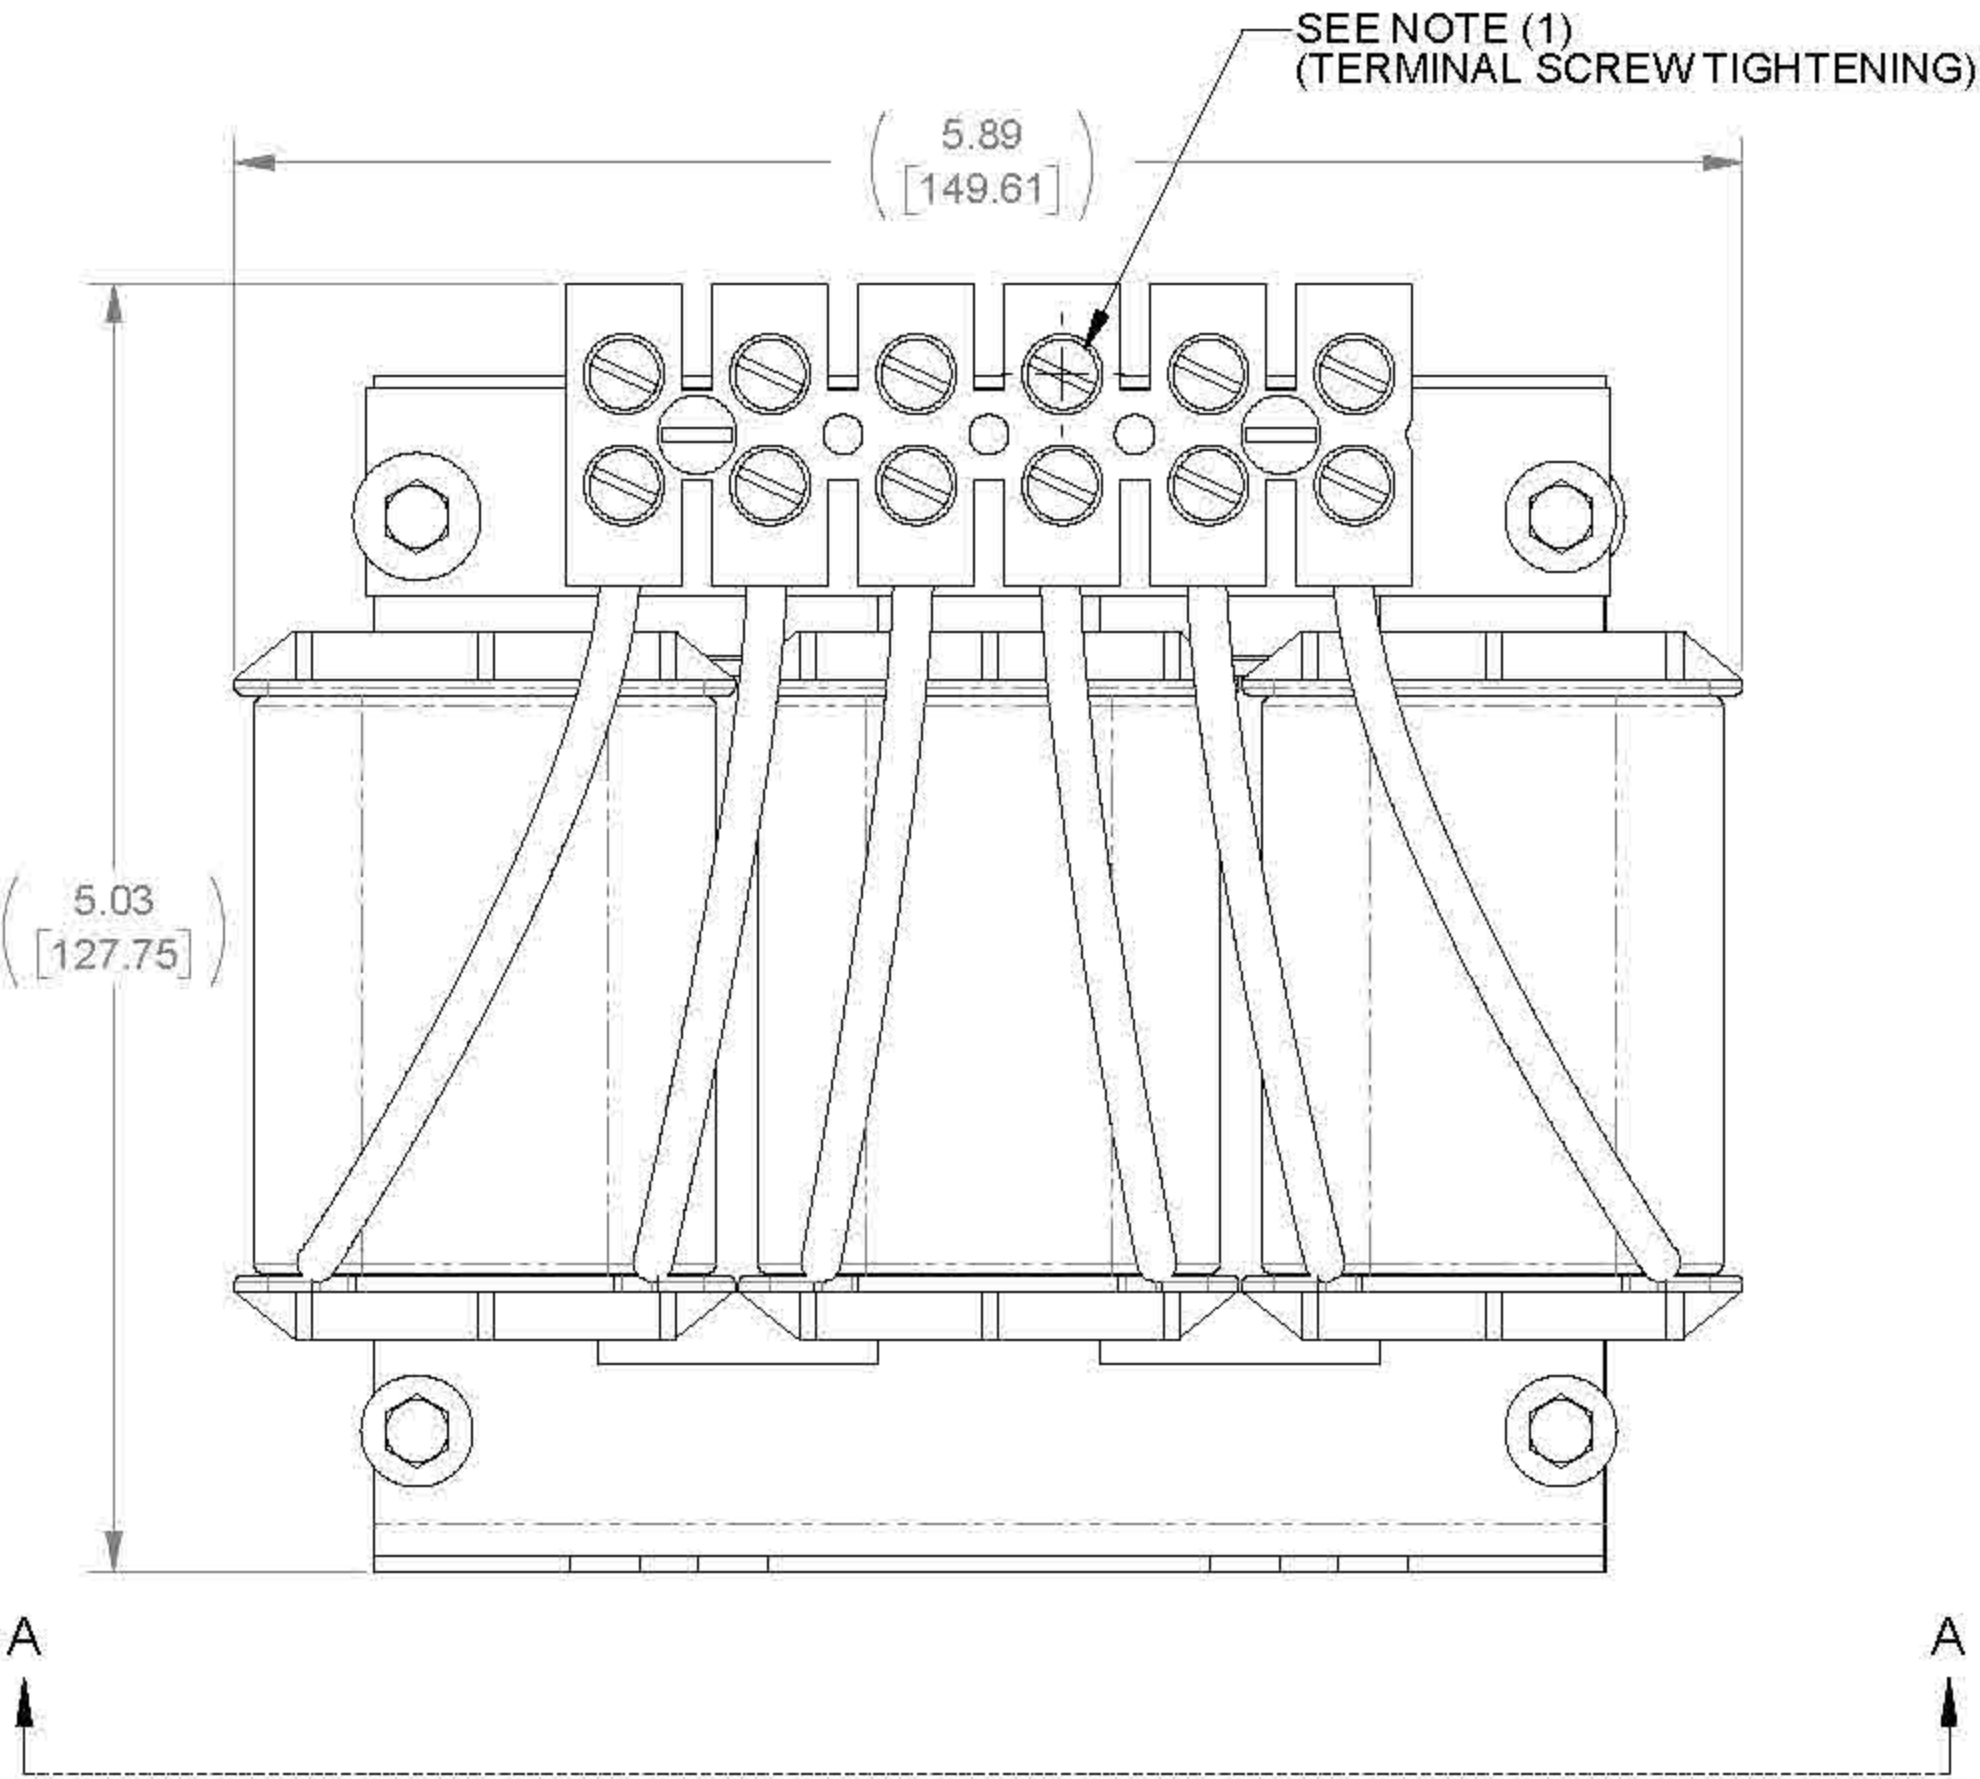
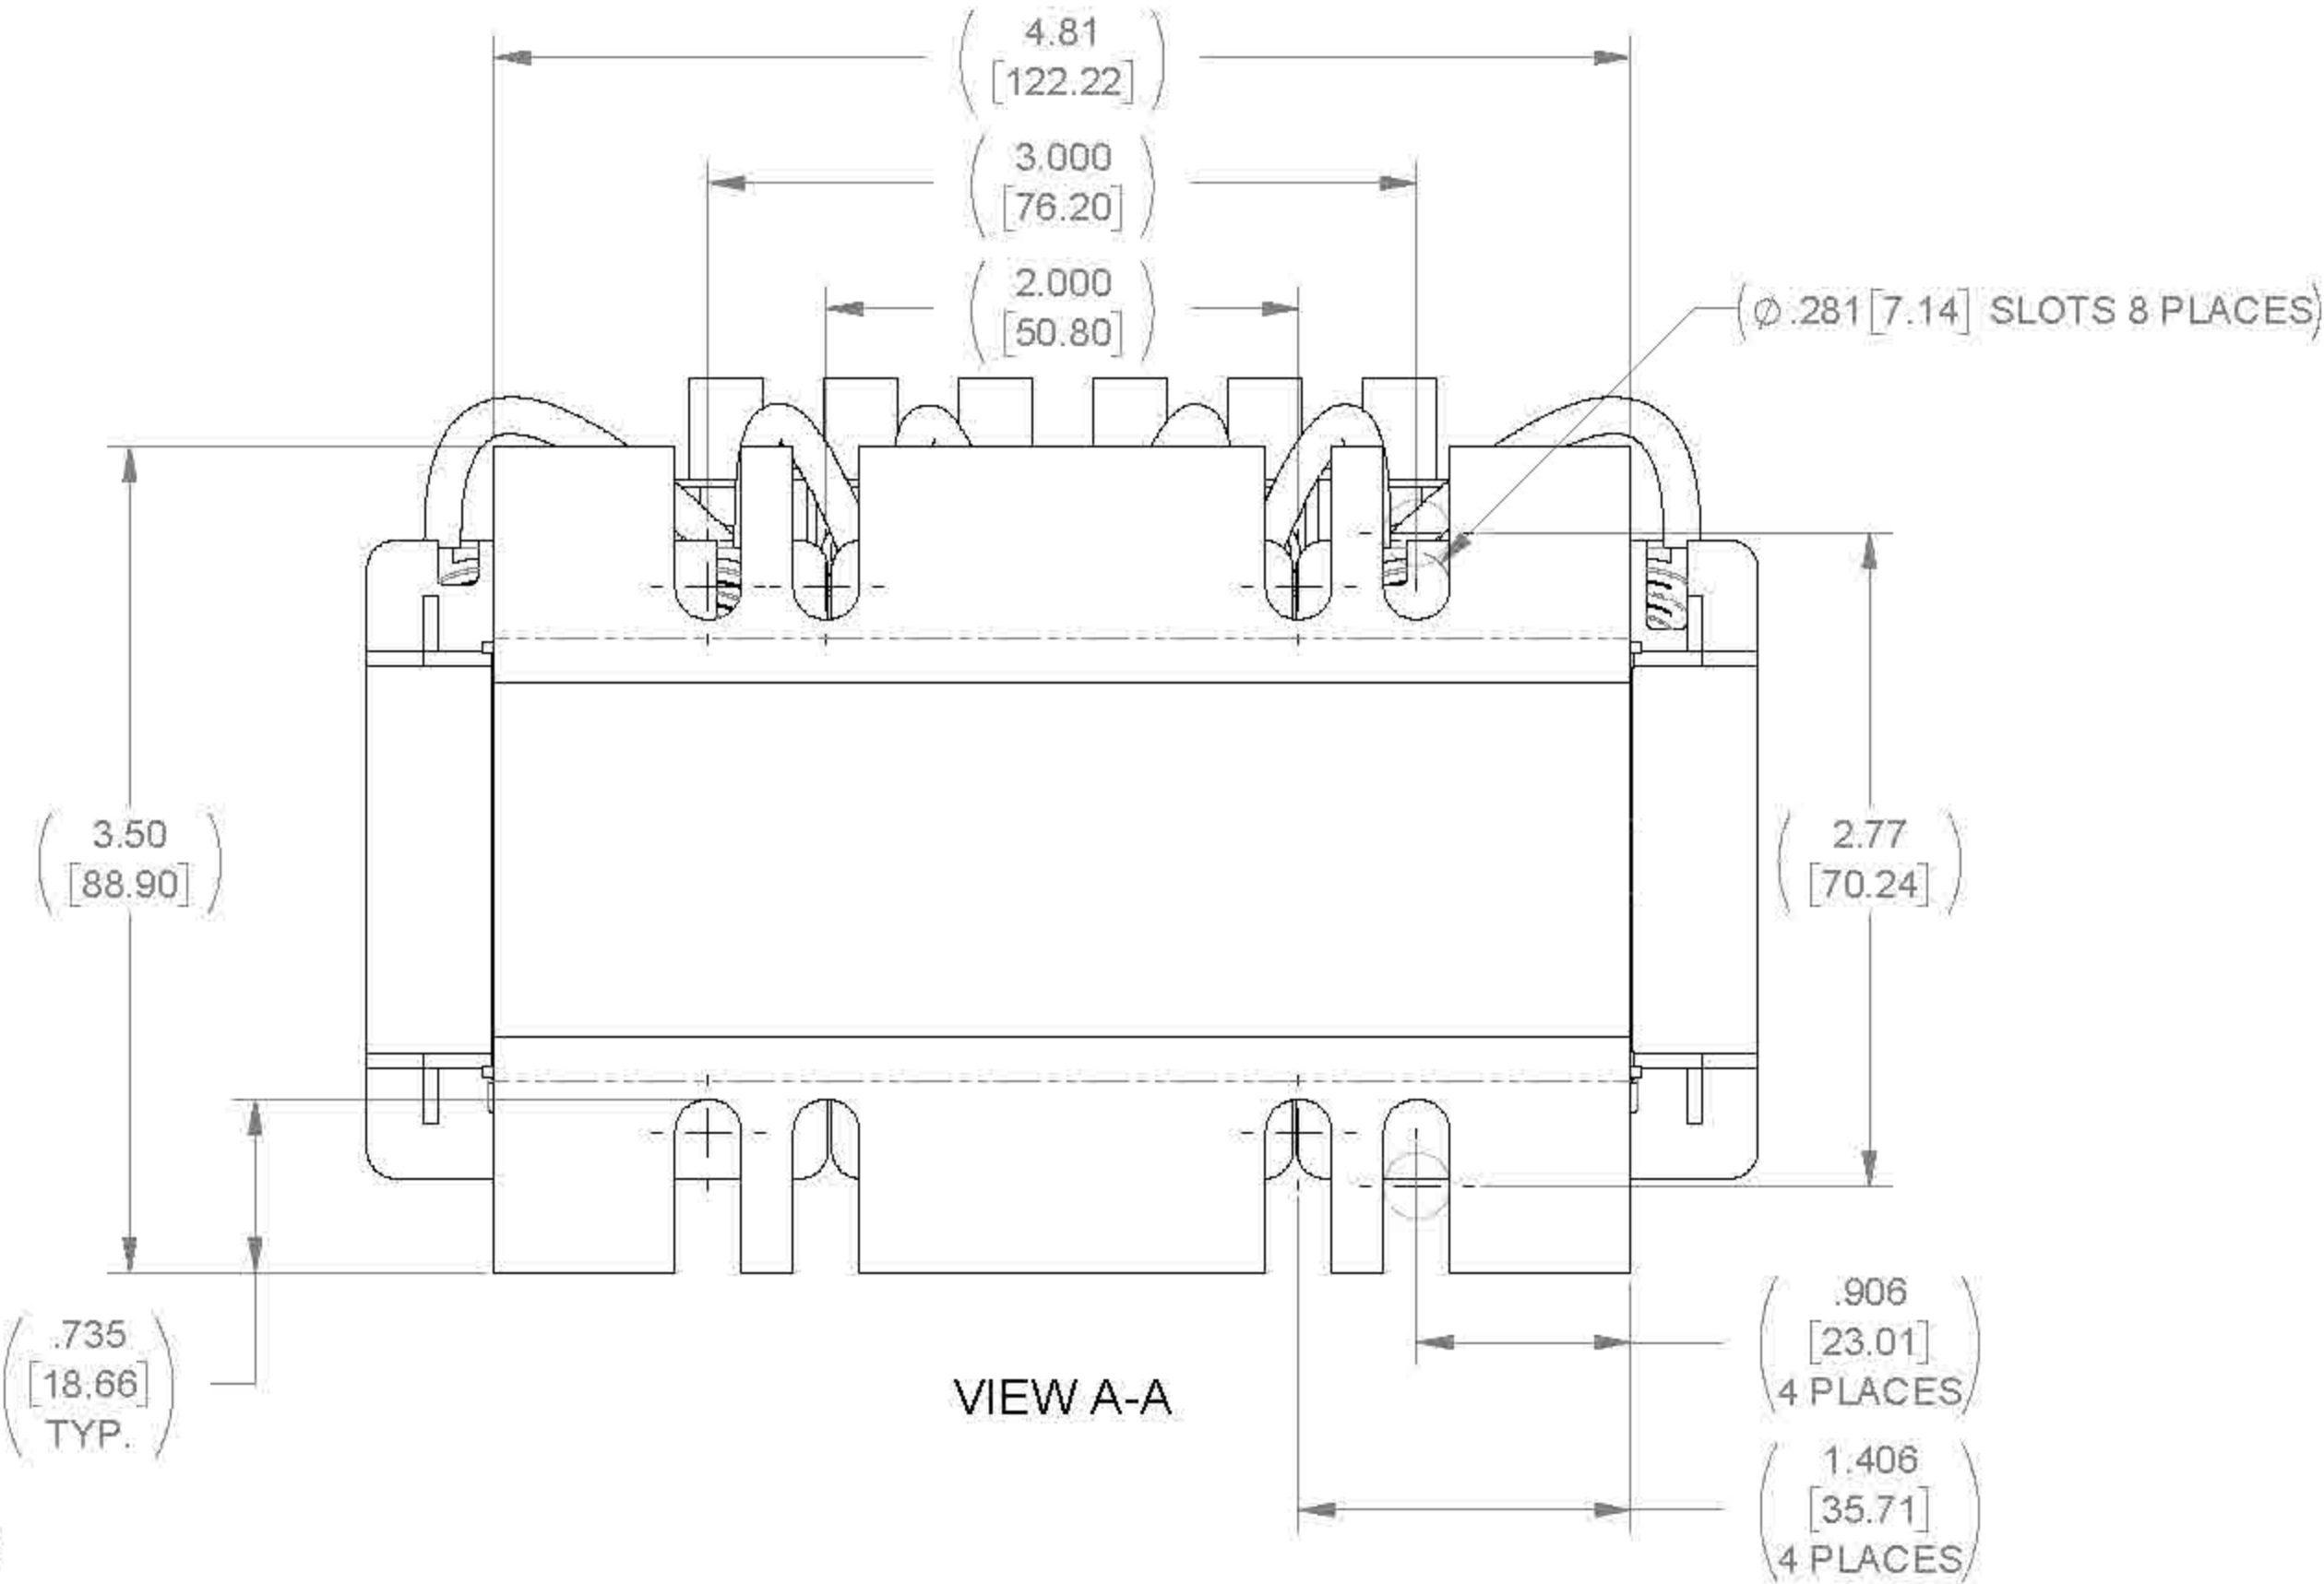


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
10.6	4.2 mH	41

ECO No	DESCRIPTION	REV BY	DATE
M10850	UPDATED WEIGHT AND TEMPLATE	CR	05/04/18

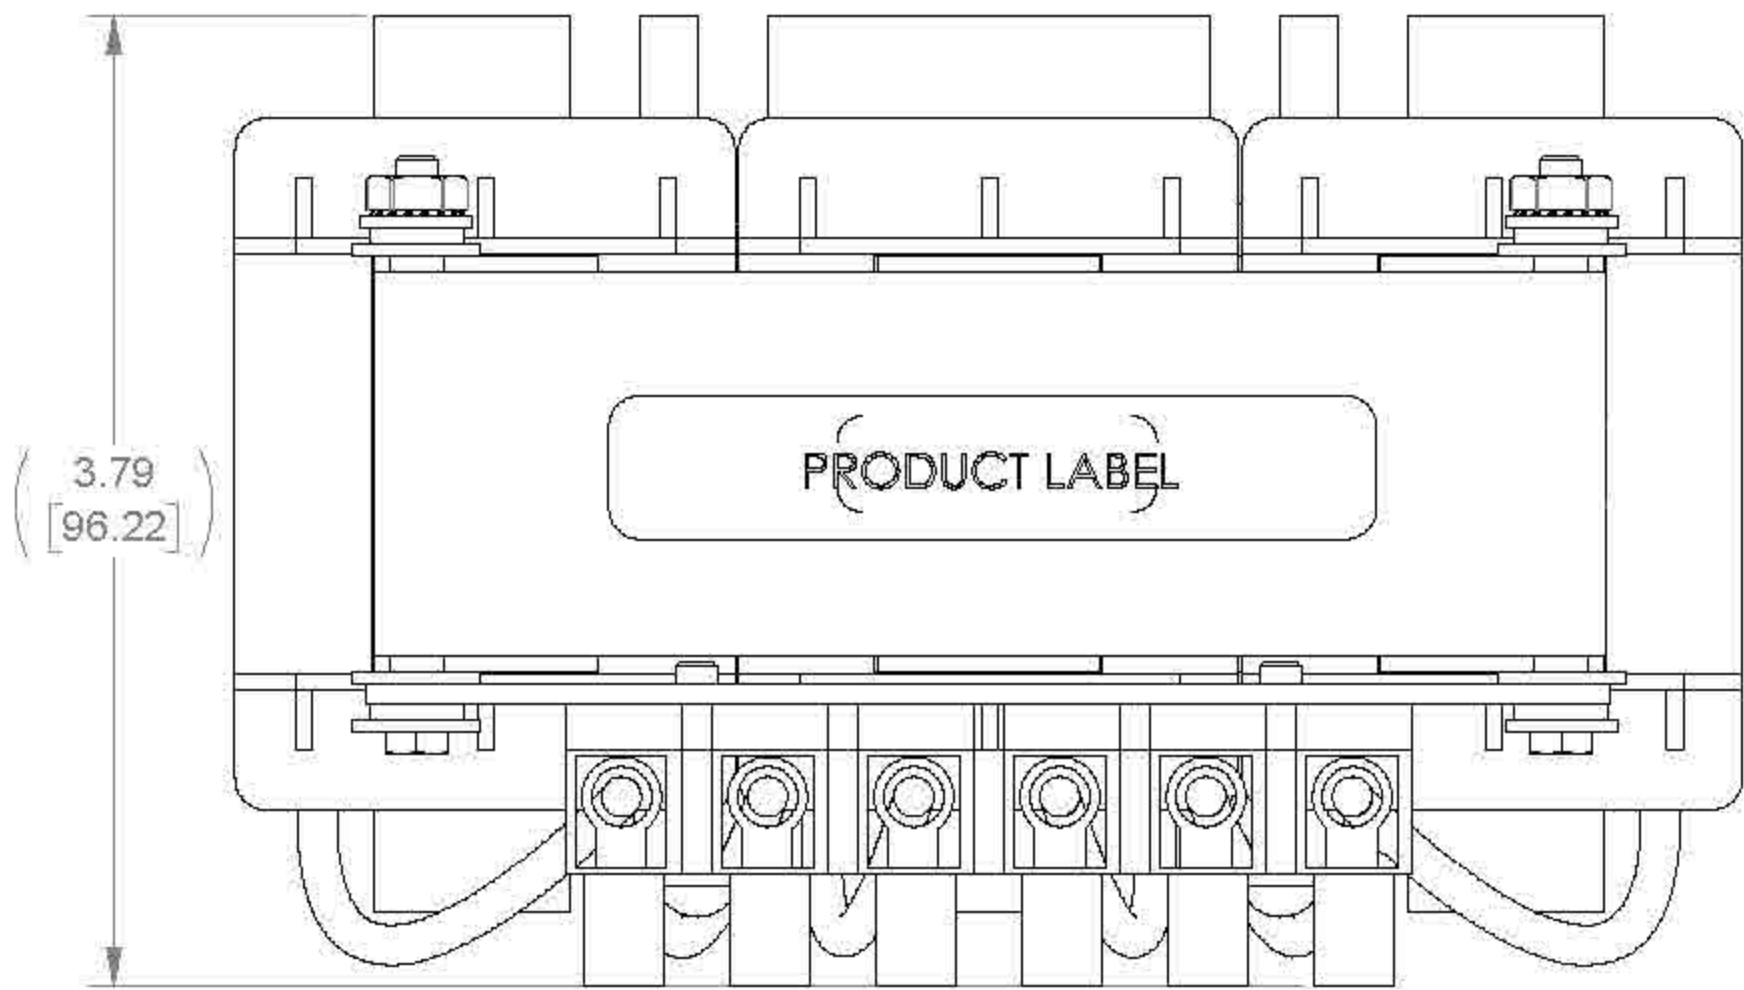

- NOTES:
- 1) TERMINAL SCREW TIGHTENING TORQUE: 16 in-lbs MAX
 - 2) WIRE RANGE: 14 - 6 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:				LINE/LOAD REACTOR(12A 4.2 mH)	
ANGLES: ± 1 °		DRAWN	CEL	DATE	06/18/96
1 PLACE .X: ± .1 [2.5]		CHECKED	WF	DATE	05/11/18
2 PLACE .XX: ± .03 [0.76]		APPROVED	RH	DATE	05/14/18
3 PLACE .XXX: ± .010 [0.254]				SIZE	D
				DWG No.	CD RL-01203
				SCALE	4:3
				REV	13
				SHEET 1 OF 1	