
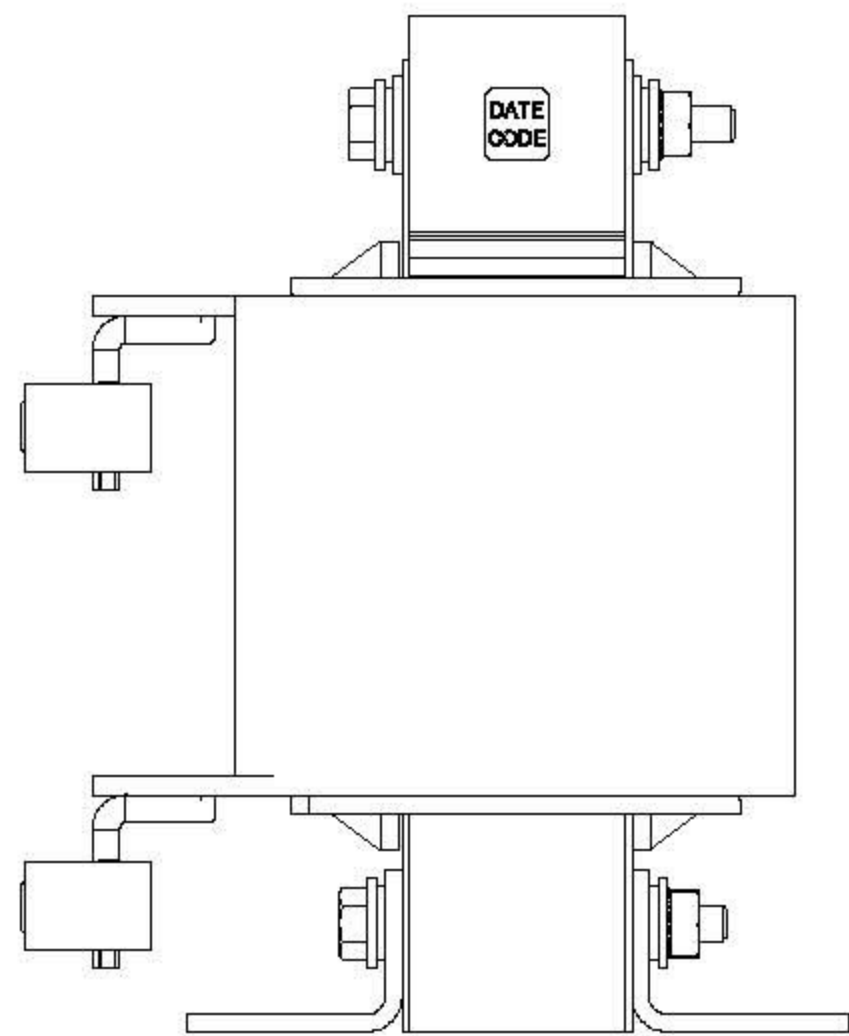
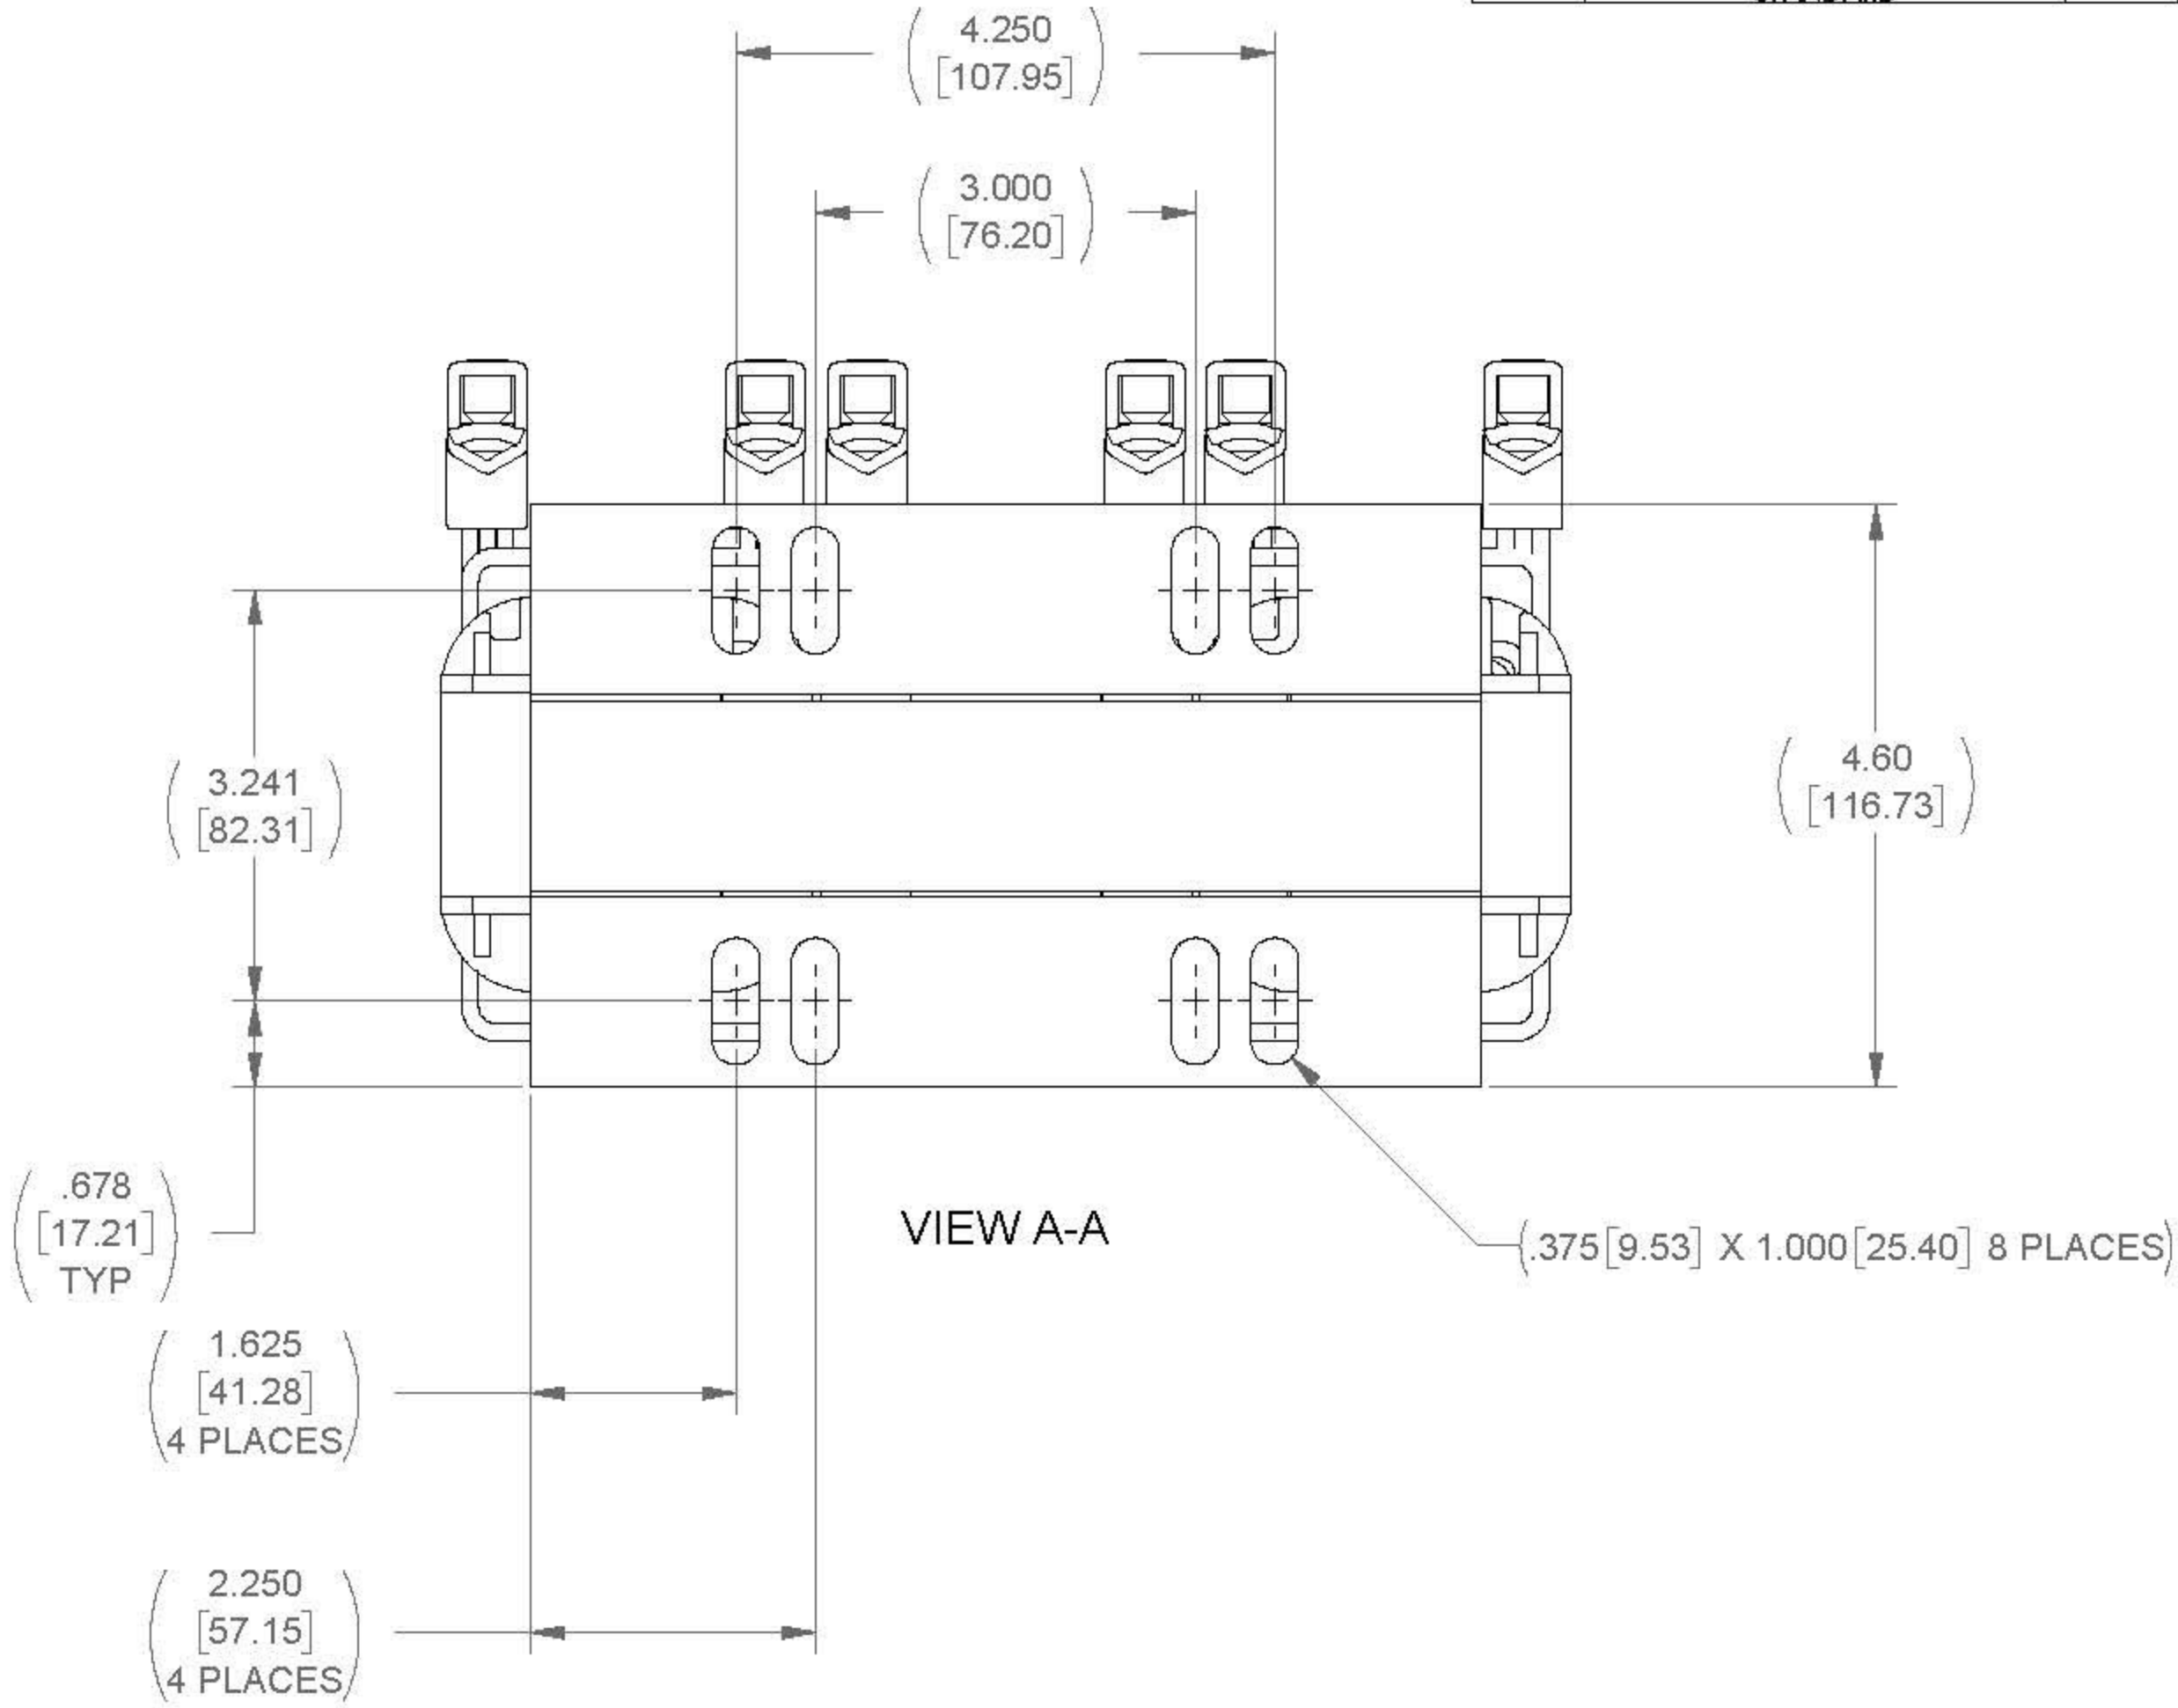
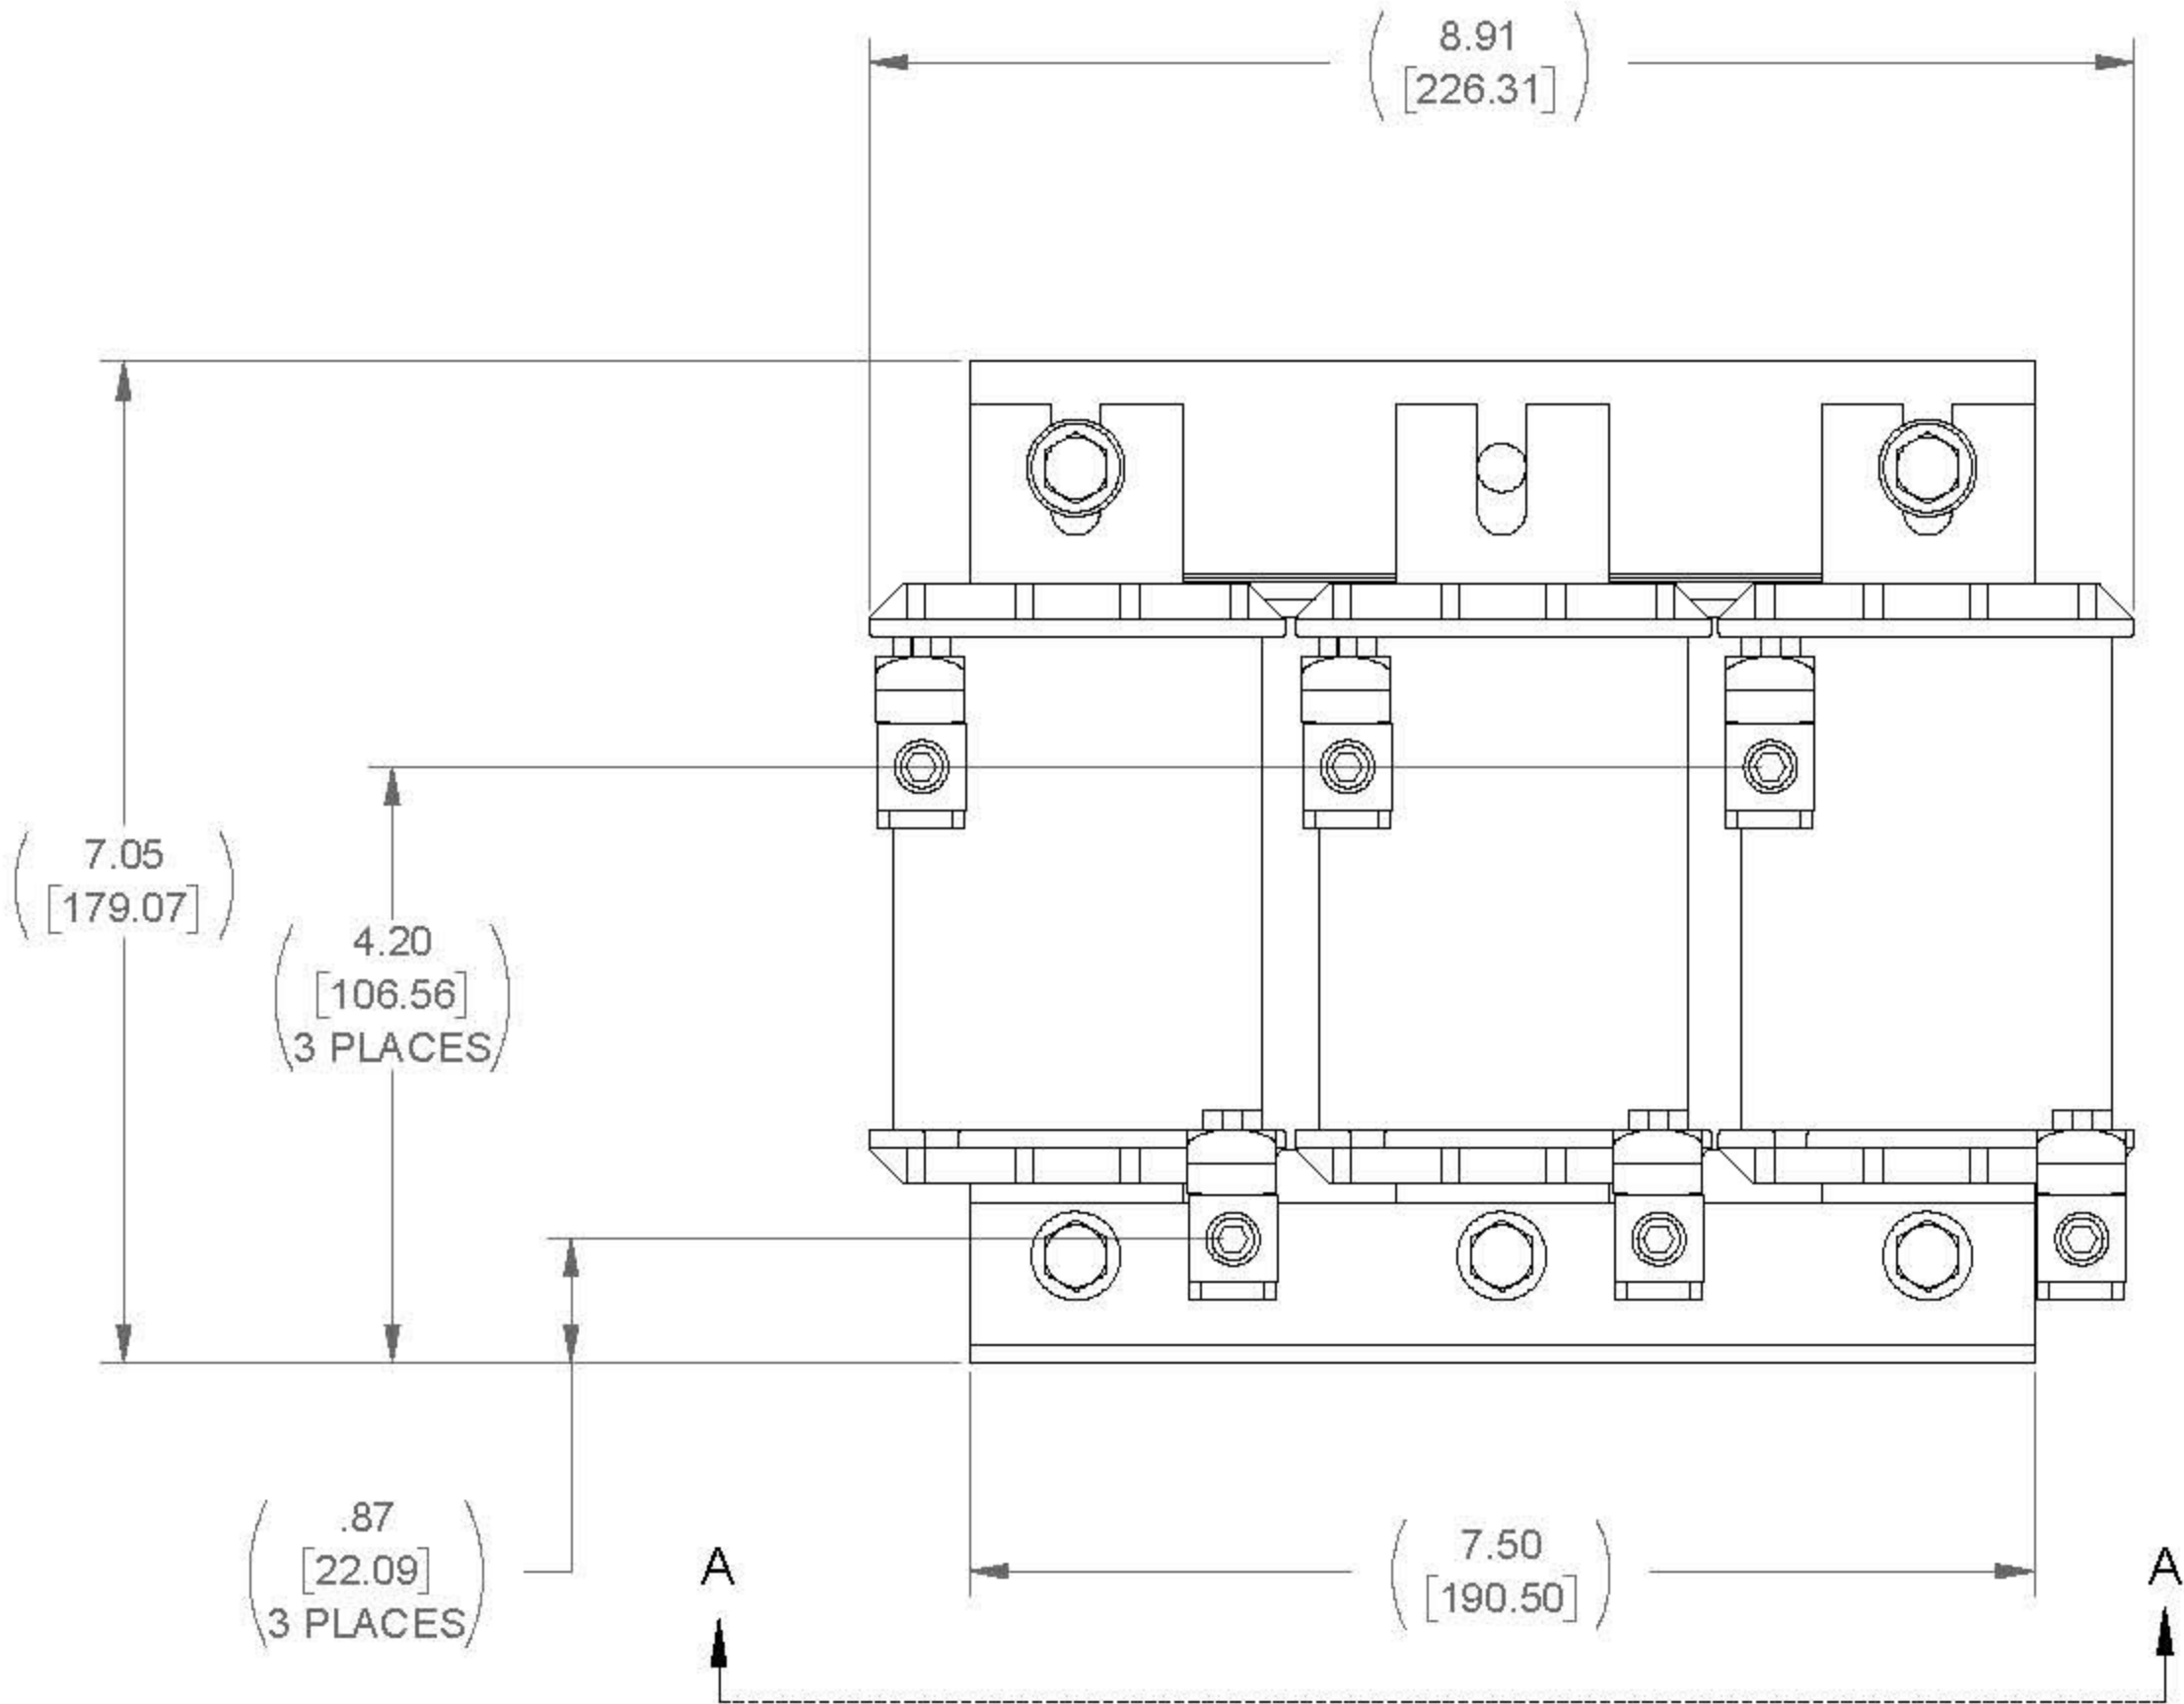


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
33	0.4 mH	86

ECO No	DESCRIPTION	REV BY	DATE
M8415	MODIFY DIMENSIONS TO CURRENT STANDARD	SU	02/25/13

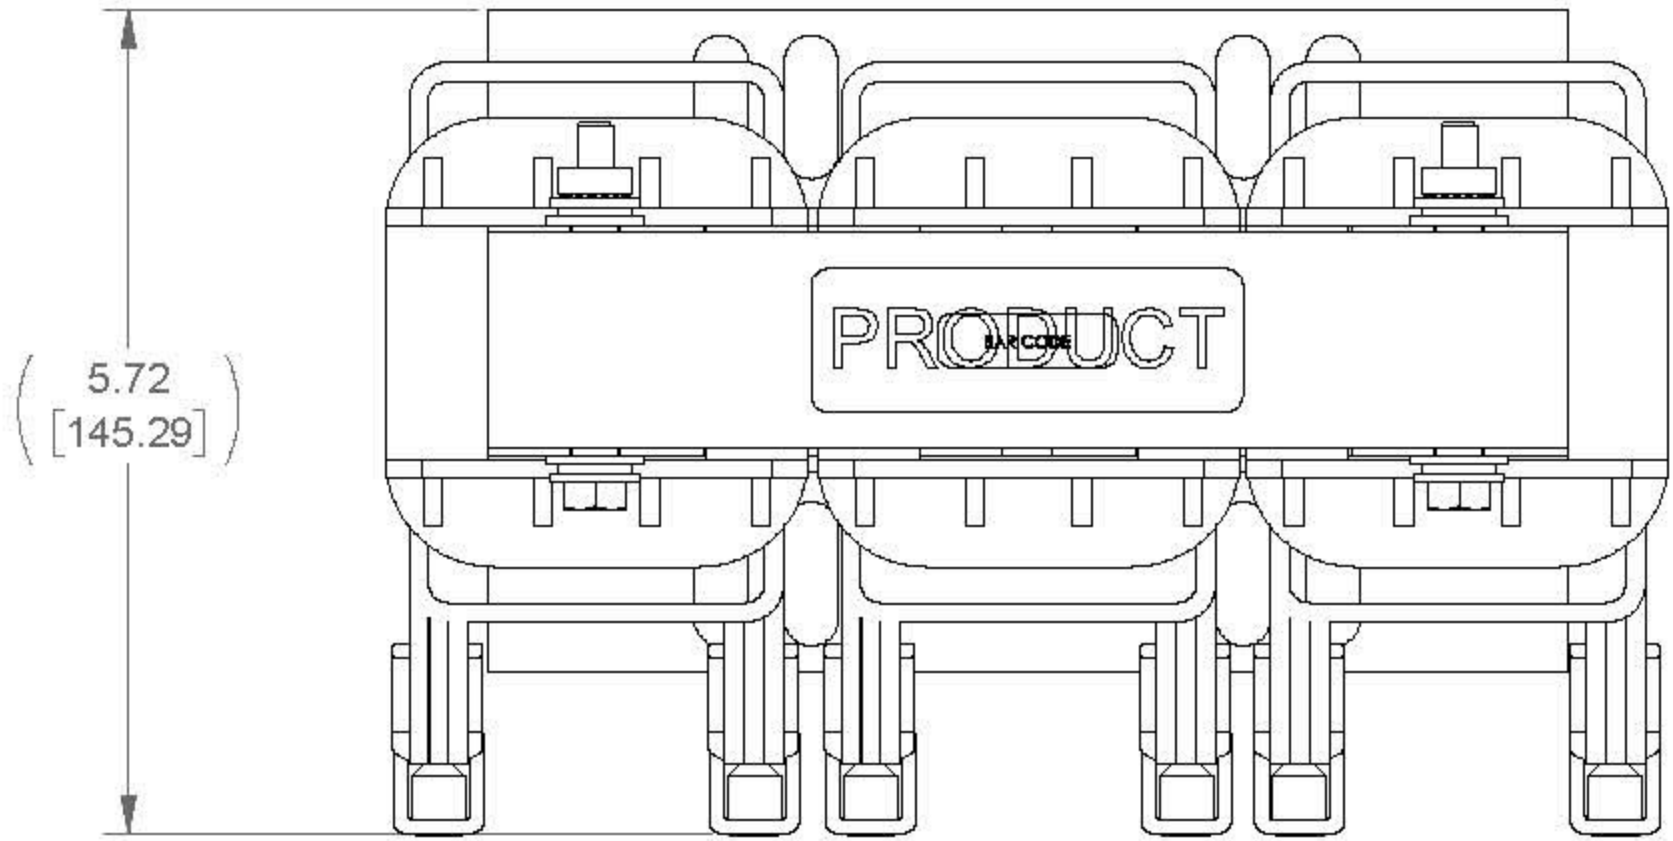

- NOTES:
1. TERMINAL SCREW TORQUE:
6-4 (45 IN-LBS MAX)
2-0 (50 IN-LBS MAX)
 2. WIRE RANGE: 6-0 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION							
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]  N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		DRAWN		DATE		LINE/LOAD REACTOR					
		KFL		9/8/05							
		CHECKED		DATE		SIZE D		DWG No. CD RL-08002		REV 19	
		TM		03/19/13							
		APPROVED		DATE							
		TM		03/19/13		SCALE 1:2		SHEET 1 OF 1			