
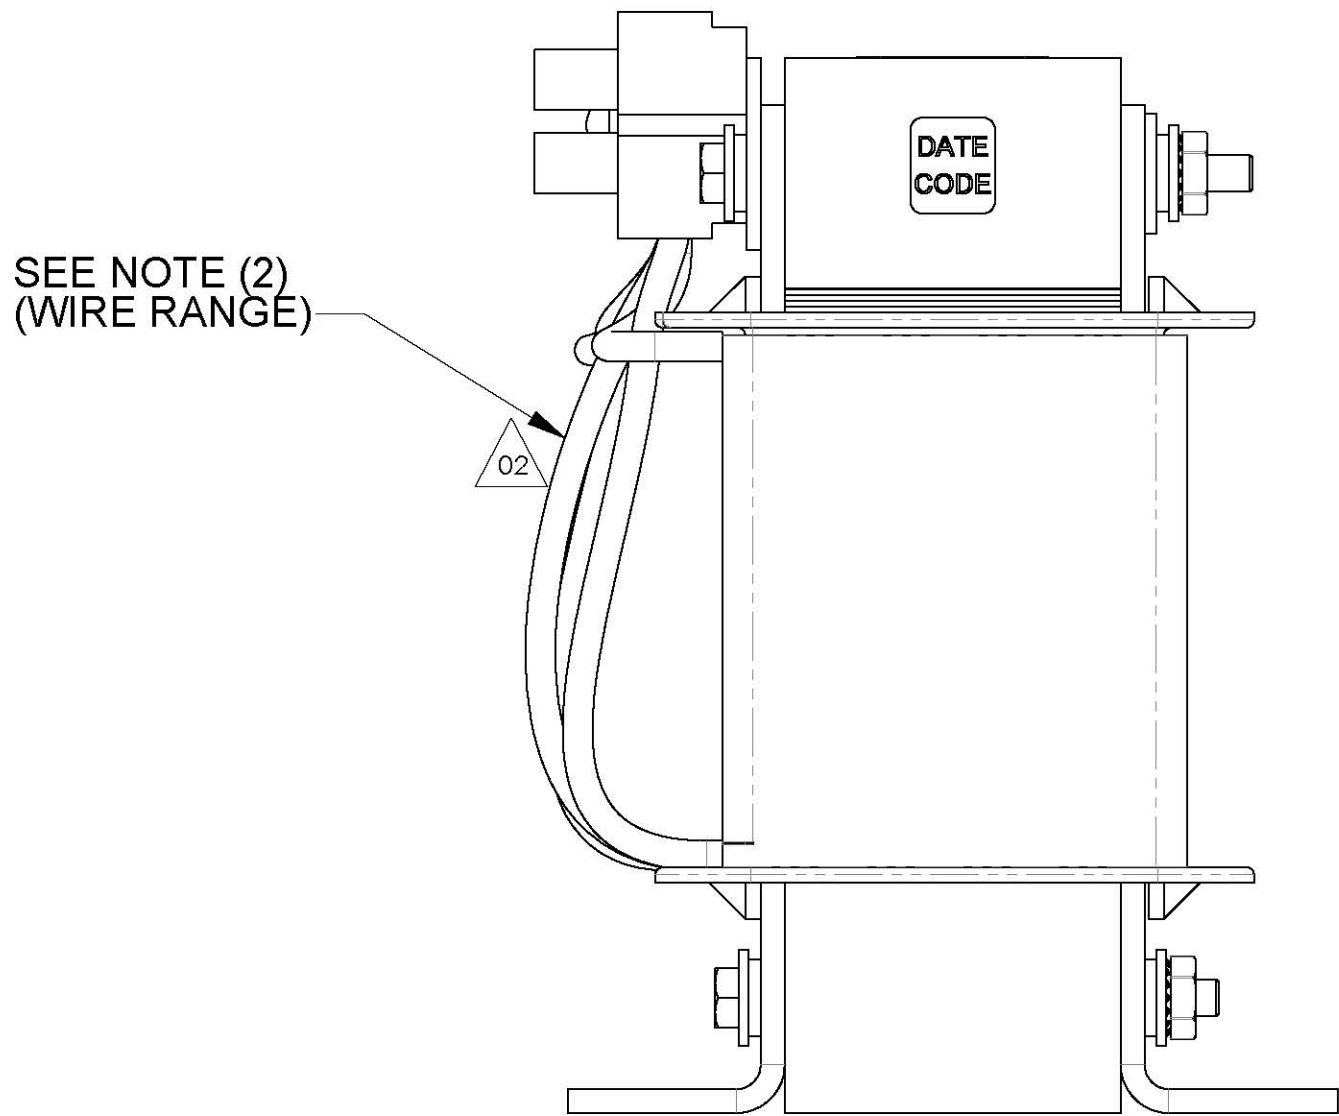
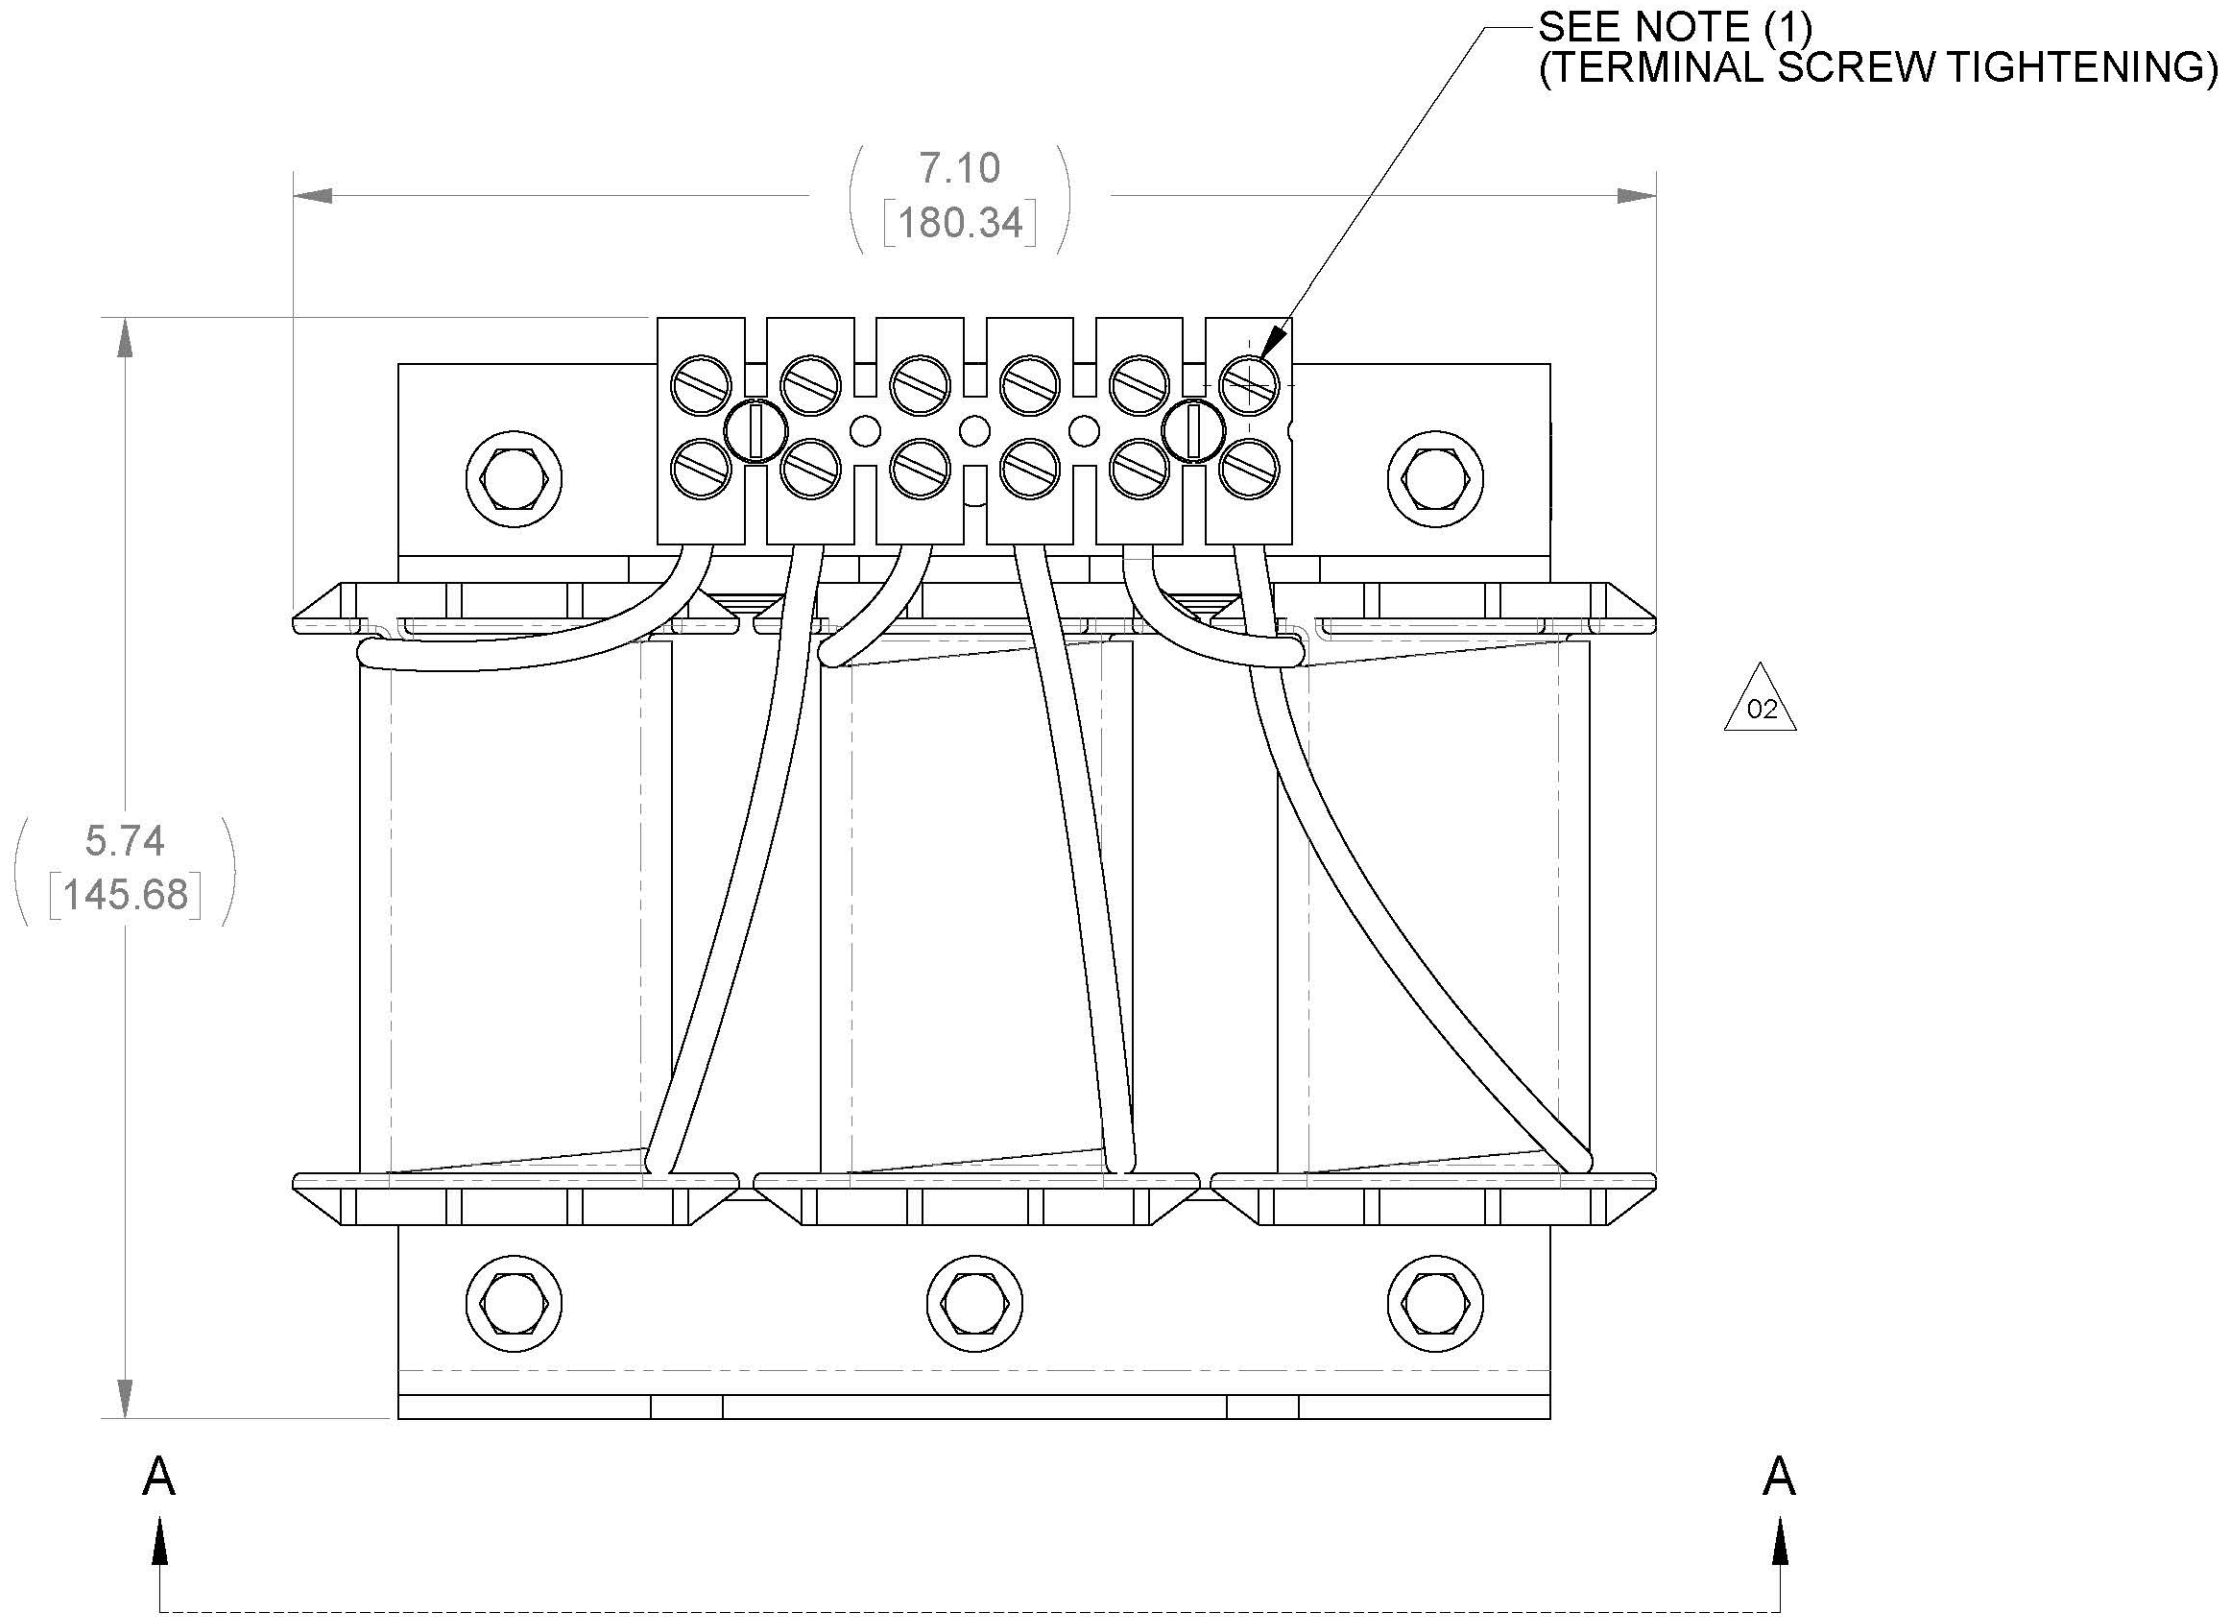
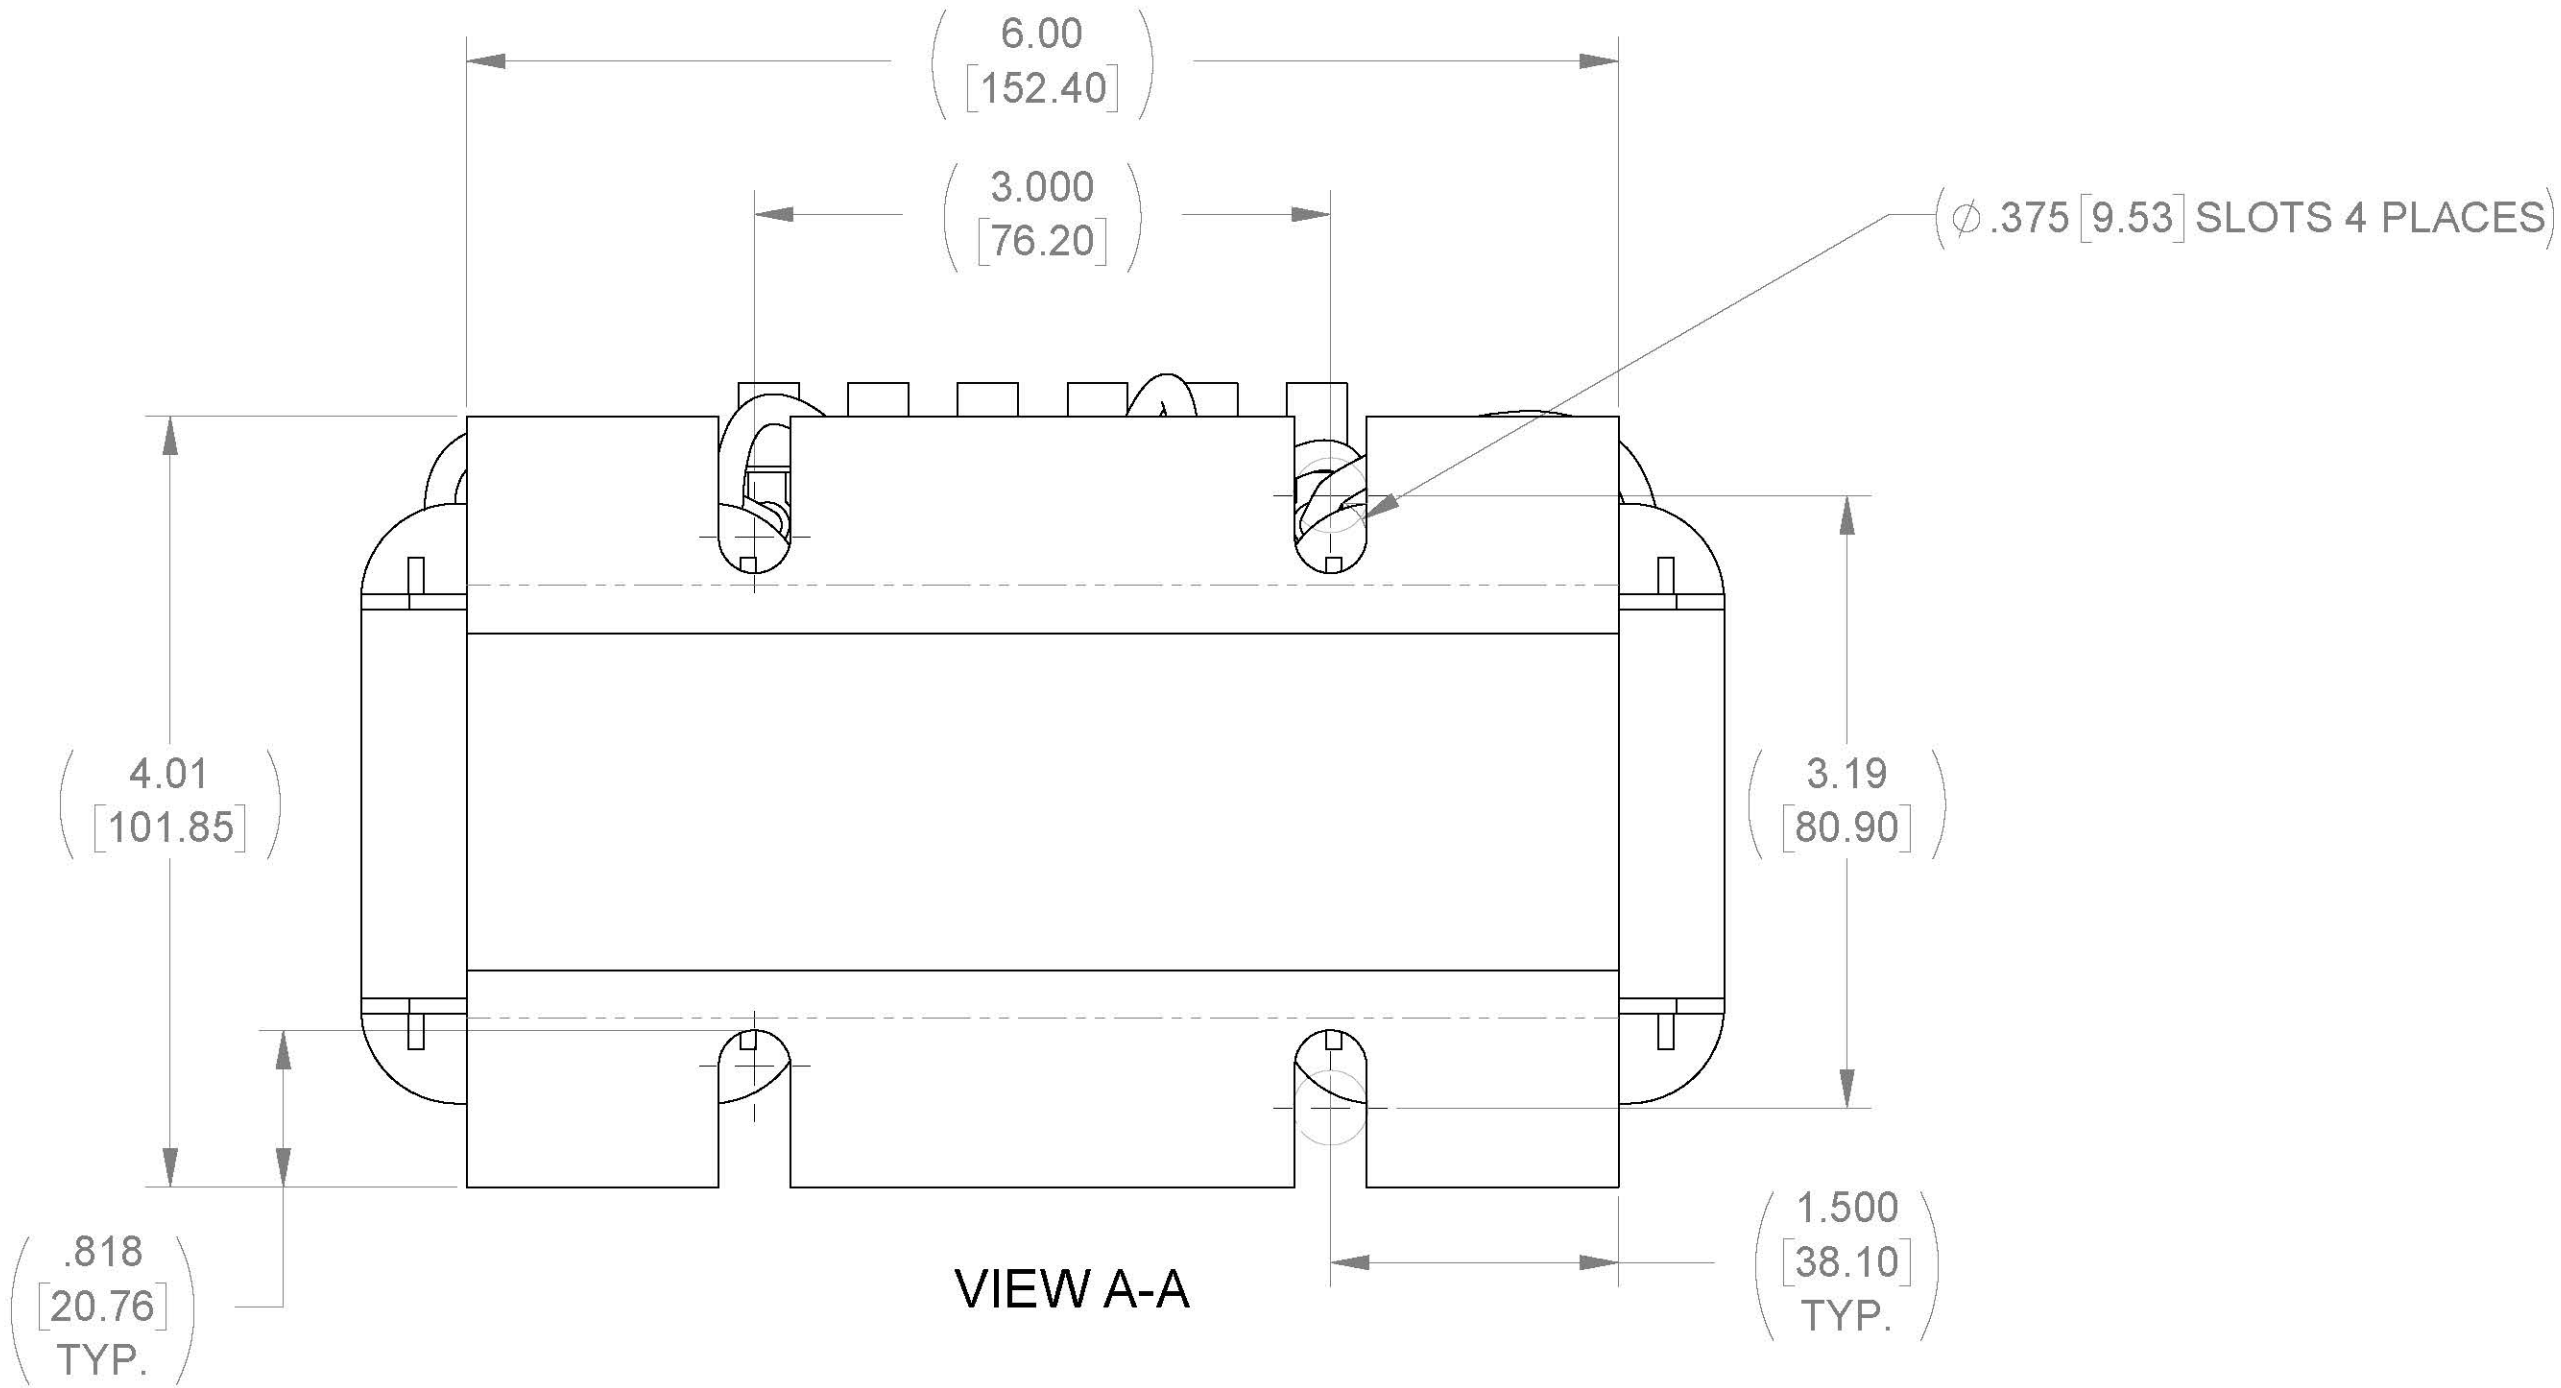


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
17	0.55mH	100

ECO No	DESCRIPTION	REV BY	DATE
M11939	COIL CHANGED/UPDATED	WF	08/07/19

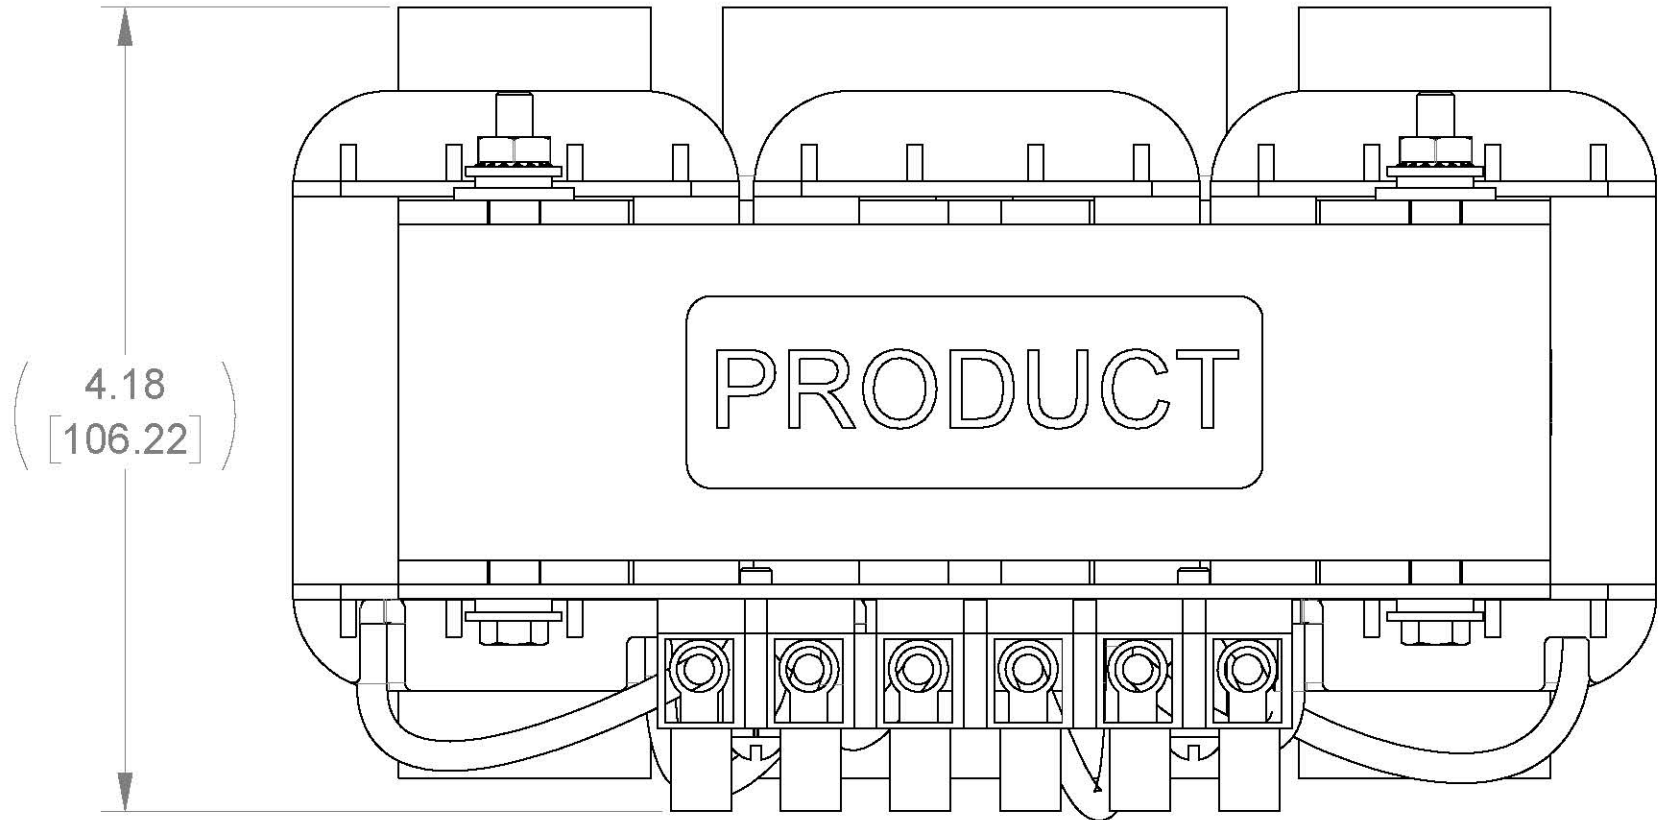

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE: 16 in-lbs MAX
 2. WIRE RANGE: 14 - 6 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION				
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254] MTE POWER QUALITY. SOLVED. N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455-4883 262.253.8200		DRAWN		DATE		LINE REACTOR (46A , .55mH)		
		JP		09/06/12				
		CHECKED		DATE				
		WF		08/07/19				
		APPROVED		DATE				
		AK		08/07/19		SIZE	DWG No.	REV
						D	CD RLW-004603	02
						SCALE	4:4	SHEET 1 OF 1