


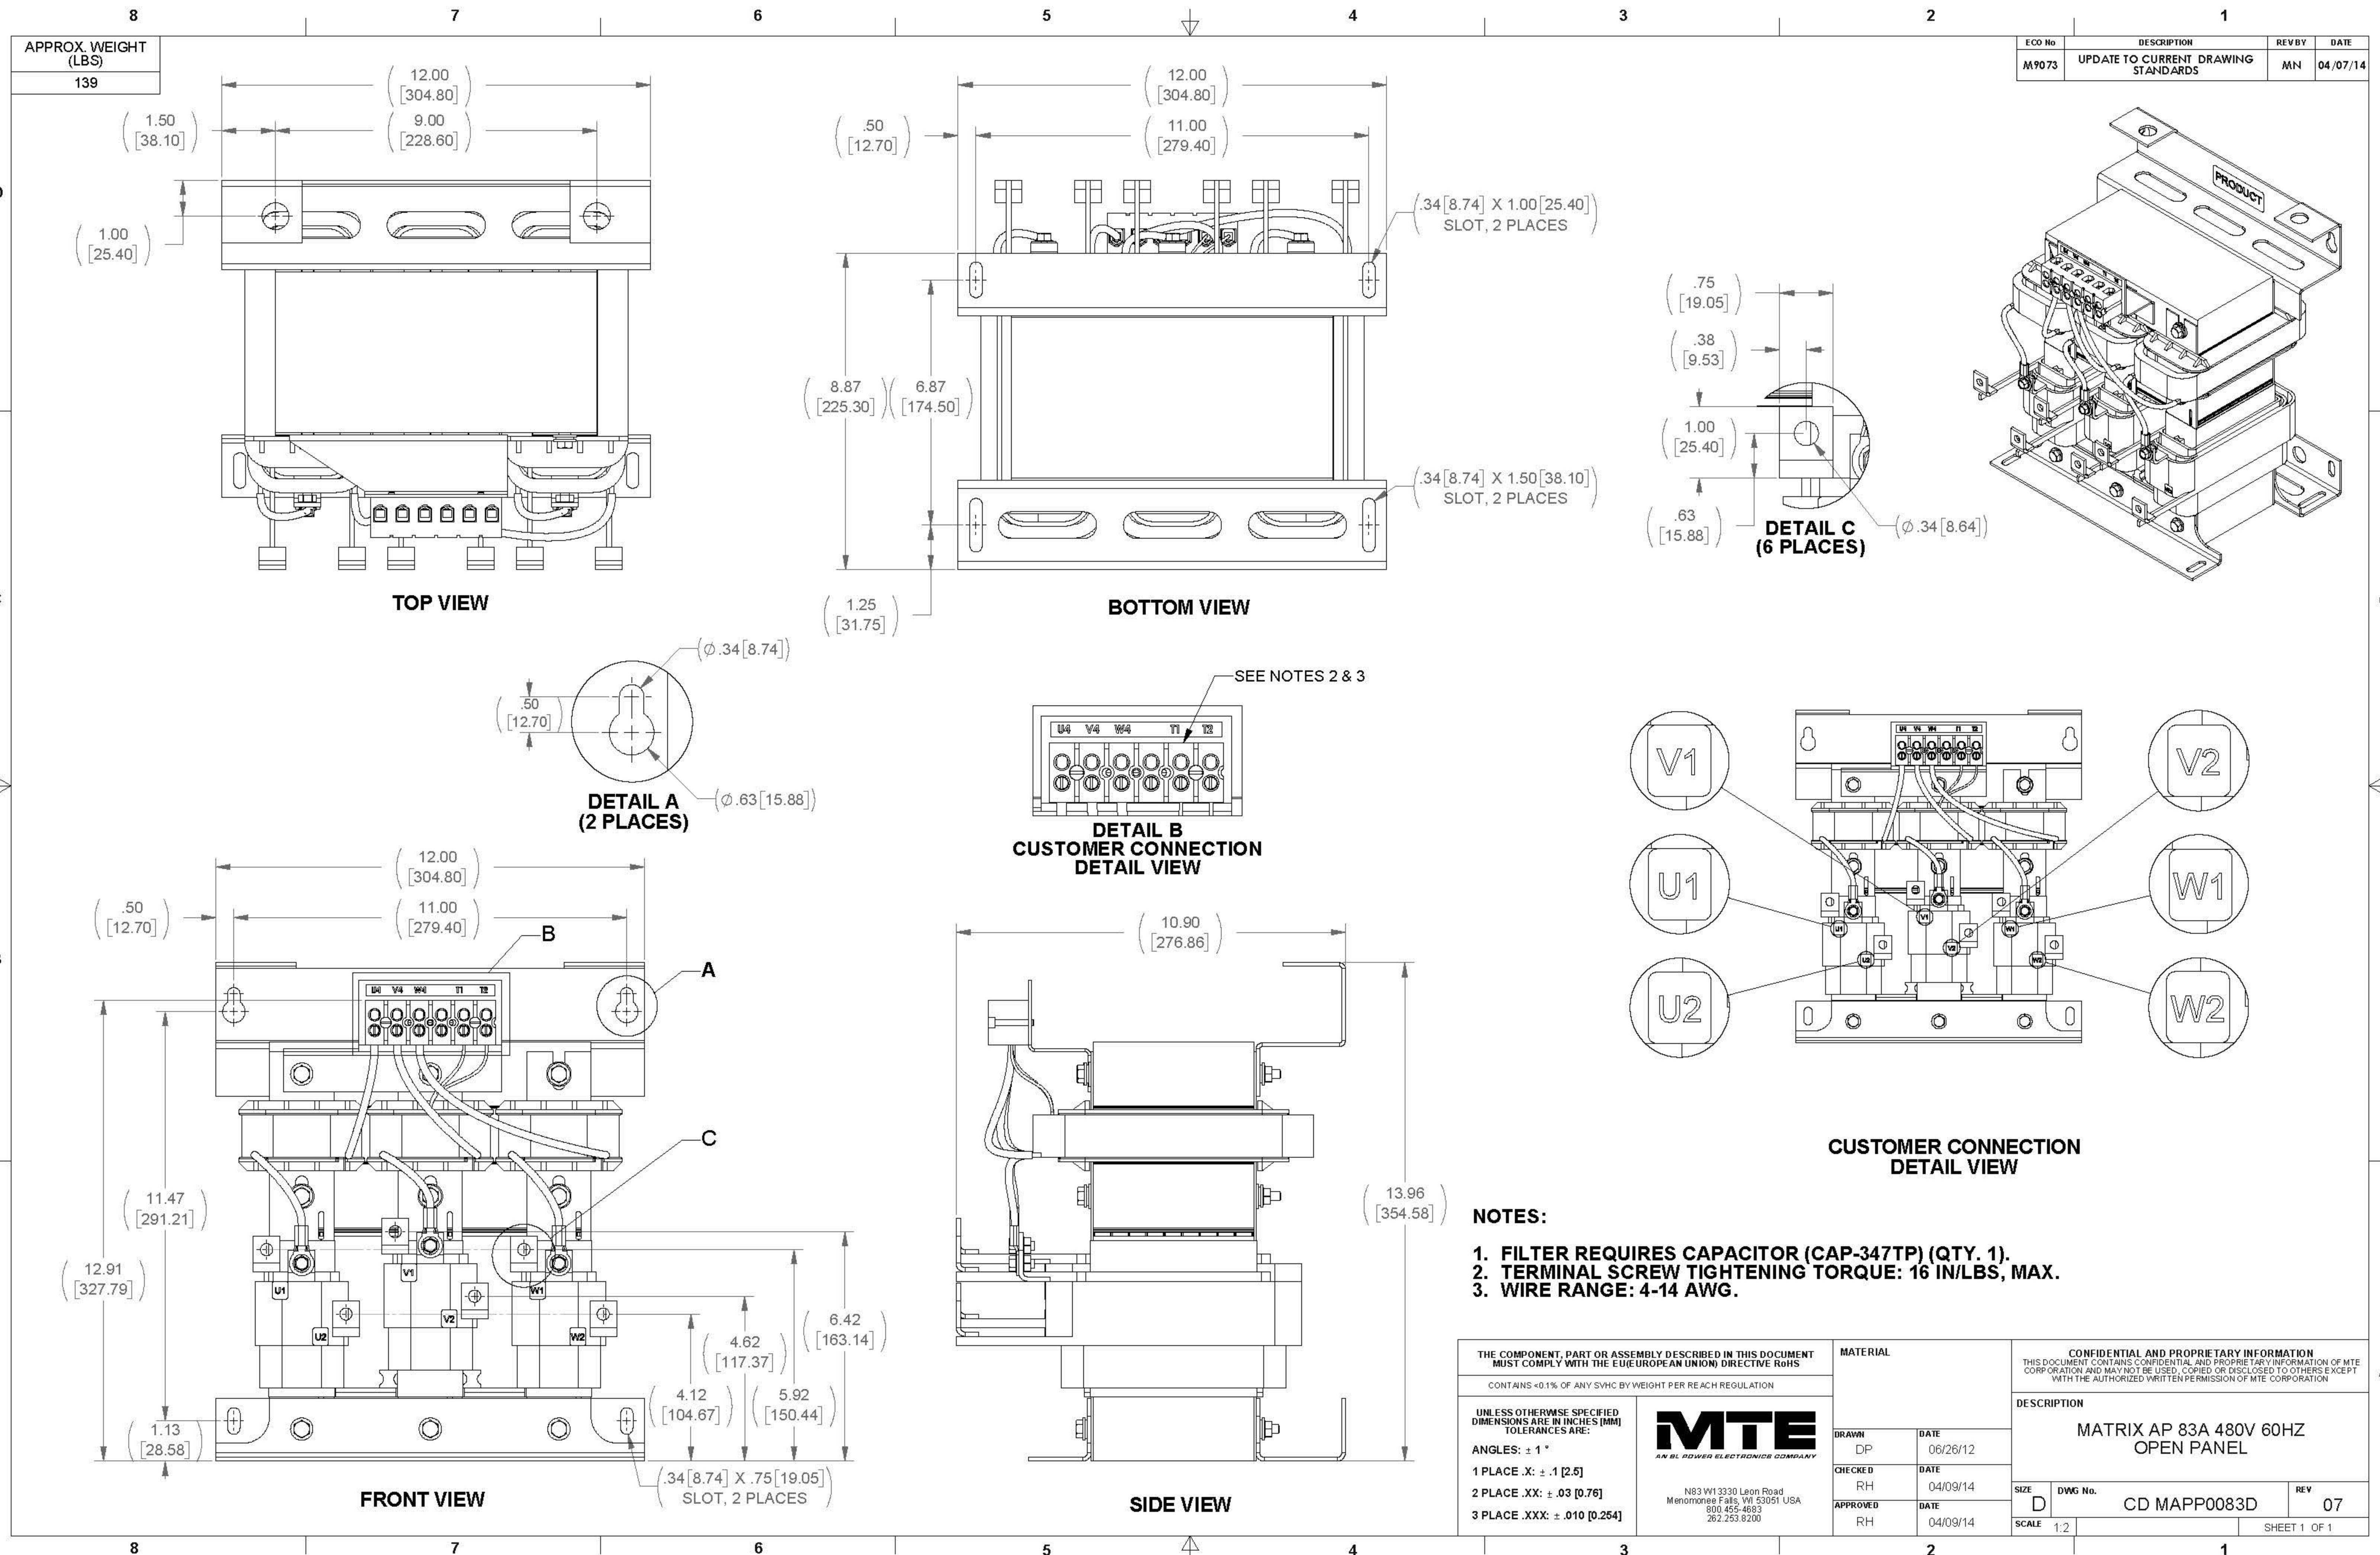

ECO No	DESCRIPTION	REV BY	DATE
M9073	UPDATE TO CURRENT DRAWING STANDARDS	MN	04/07/14

NOTES:

1. FILTER REQUIRES CAPACITOR (CAP-347TP) (QTY. 1).
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS, MAX.
3. WIRE RANGE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (MM) TOLERANCES ARE:				MATRIX AP 83A 480V 60HZ OPEN PANEL	
ANGLES: ± 1 °				SIZE	REV
1 PLACE .XX: ± .1 [2.5]				D	07
2 PLACE .XX: ± .03 [0.76]				CD MAPP0083D	
3 PLACE .XXX: ± .010 [0.254]				SCALE	SHEET 1 OF 1
				1:2	

MTE
AN BL POWER ELECTRONICS COMPANY

N83 W1 3330 Leon Road
Menomonee Falls, WI 53051 USA
800.455.4693
262.253.8200

DRAWN	DATE
DP	06/26/12
CHECKED	DATE
RH	04/09/14
APPROVED	DATE
RH	04/09/14