


Outer Diameter: _____

Bore Size: _____

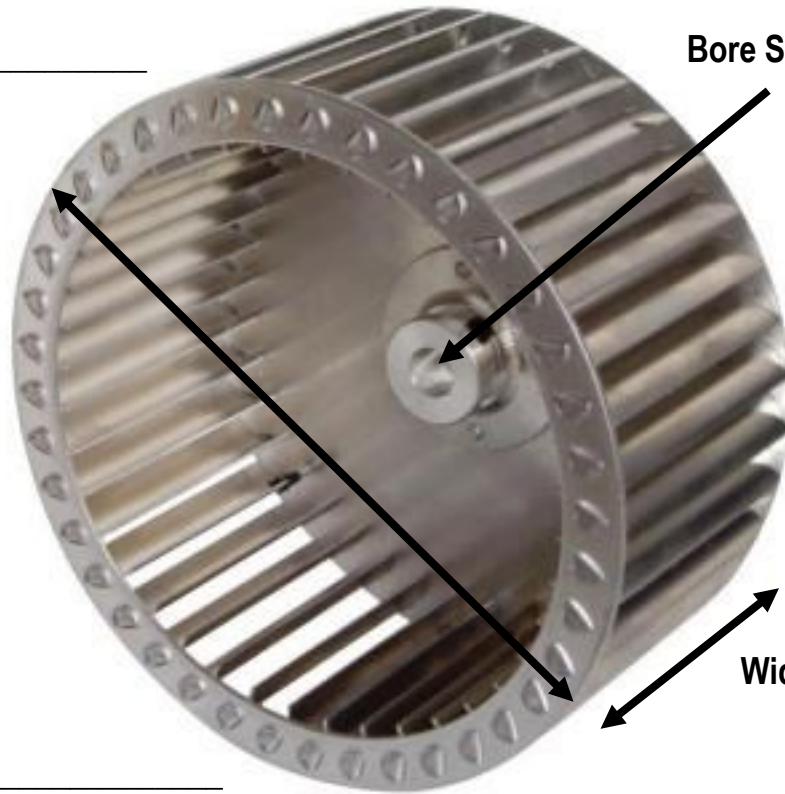

Width: _____

Operating Speed: _____

Wheel Construction: _____ (Steel or Lightweight Aluminum)

Direction of blades FACING SOLID BACK PLATE: Cupping Right _____ (CW)

OR Cupping Left _____ (CCW)

STOCK BLOWER WHEEL REPLACEMENTS

All stock wheels CLOCKWISE Rotation

BLOWER SIZE	DIAM	WIDTH	BORE
3	4.75"	2.50"	3/8"
4	4.75"	2.94"	5/8"
6	6.25"	3.00"	5/8"
8**	8 - 3/8"	4.00	5/8"
9**	8 - 3/8"	4.00"	5/8"
10	10 - 5/8"	5.00"	5/8"
11	10 - 5/8"	5.00"	1 - 3/8"

****All standard stock wheels are balanced for 3600 RPM operation except Size 8, which is balanced for 1800 RPM operation.**

**Custom Wheels available,
built to order. Typical lead
time 4 weeks.**

**Non-cancelable,
non-returnable once
ordered. Must have the
above specifications to
quote.**