
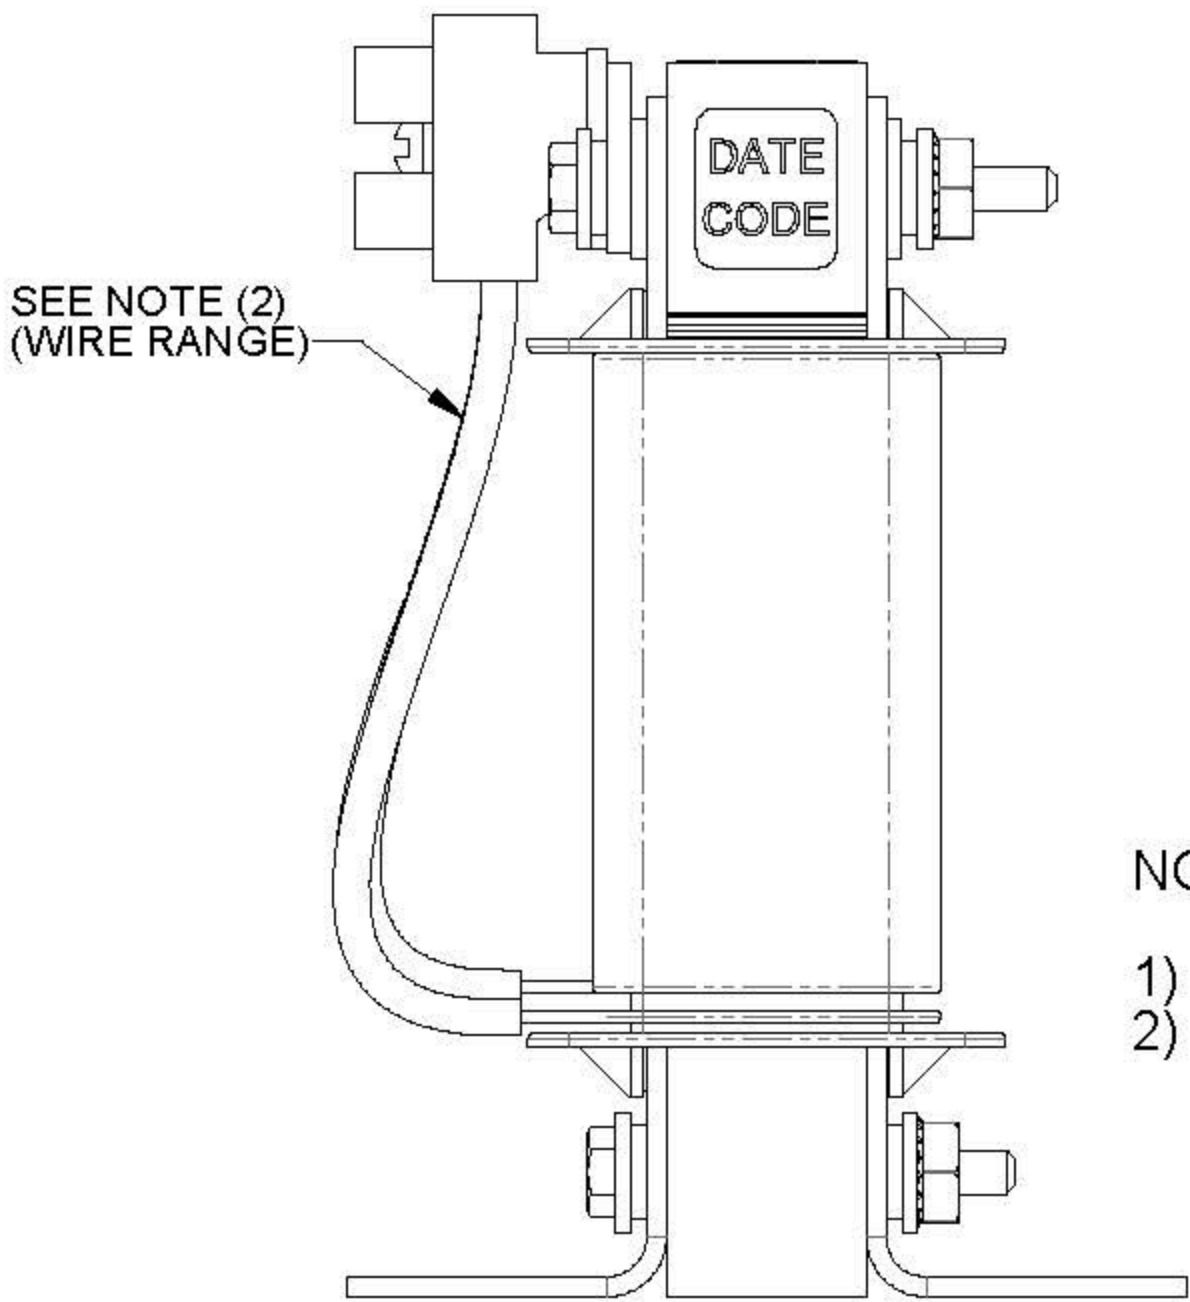
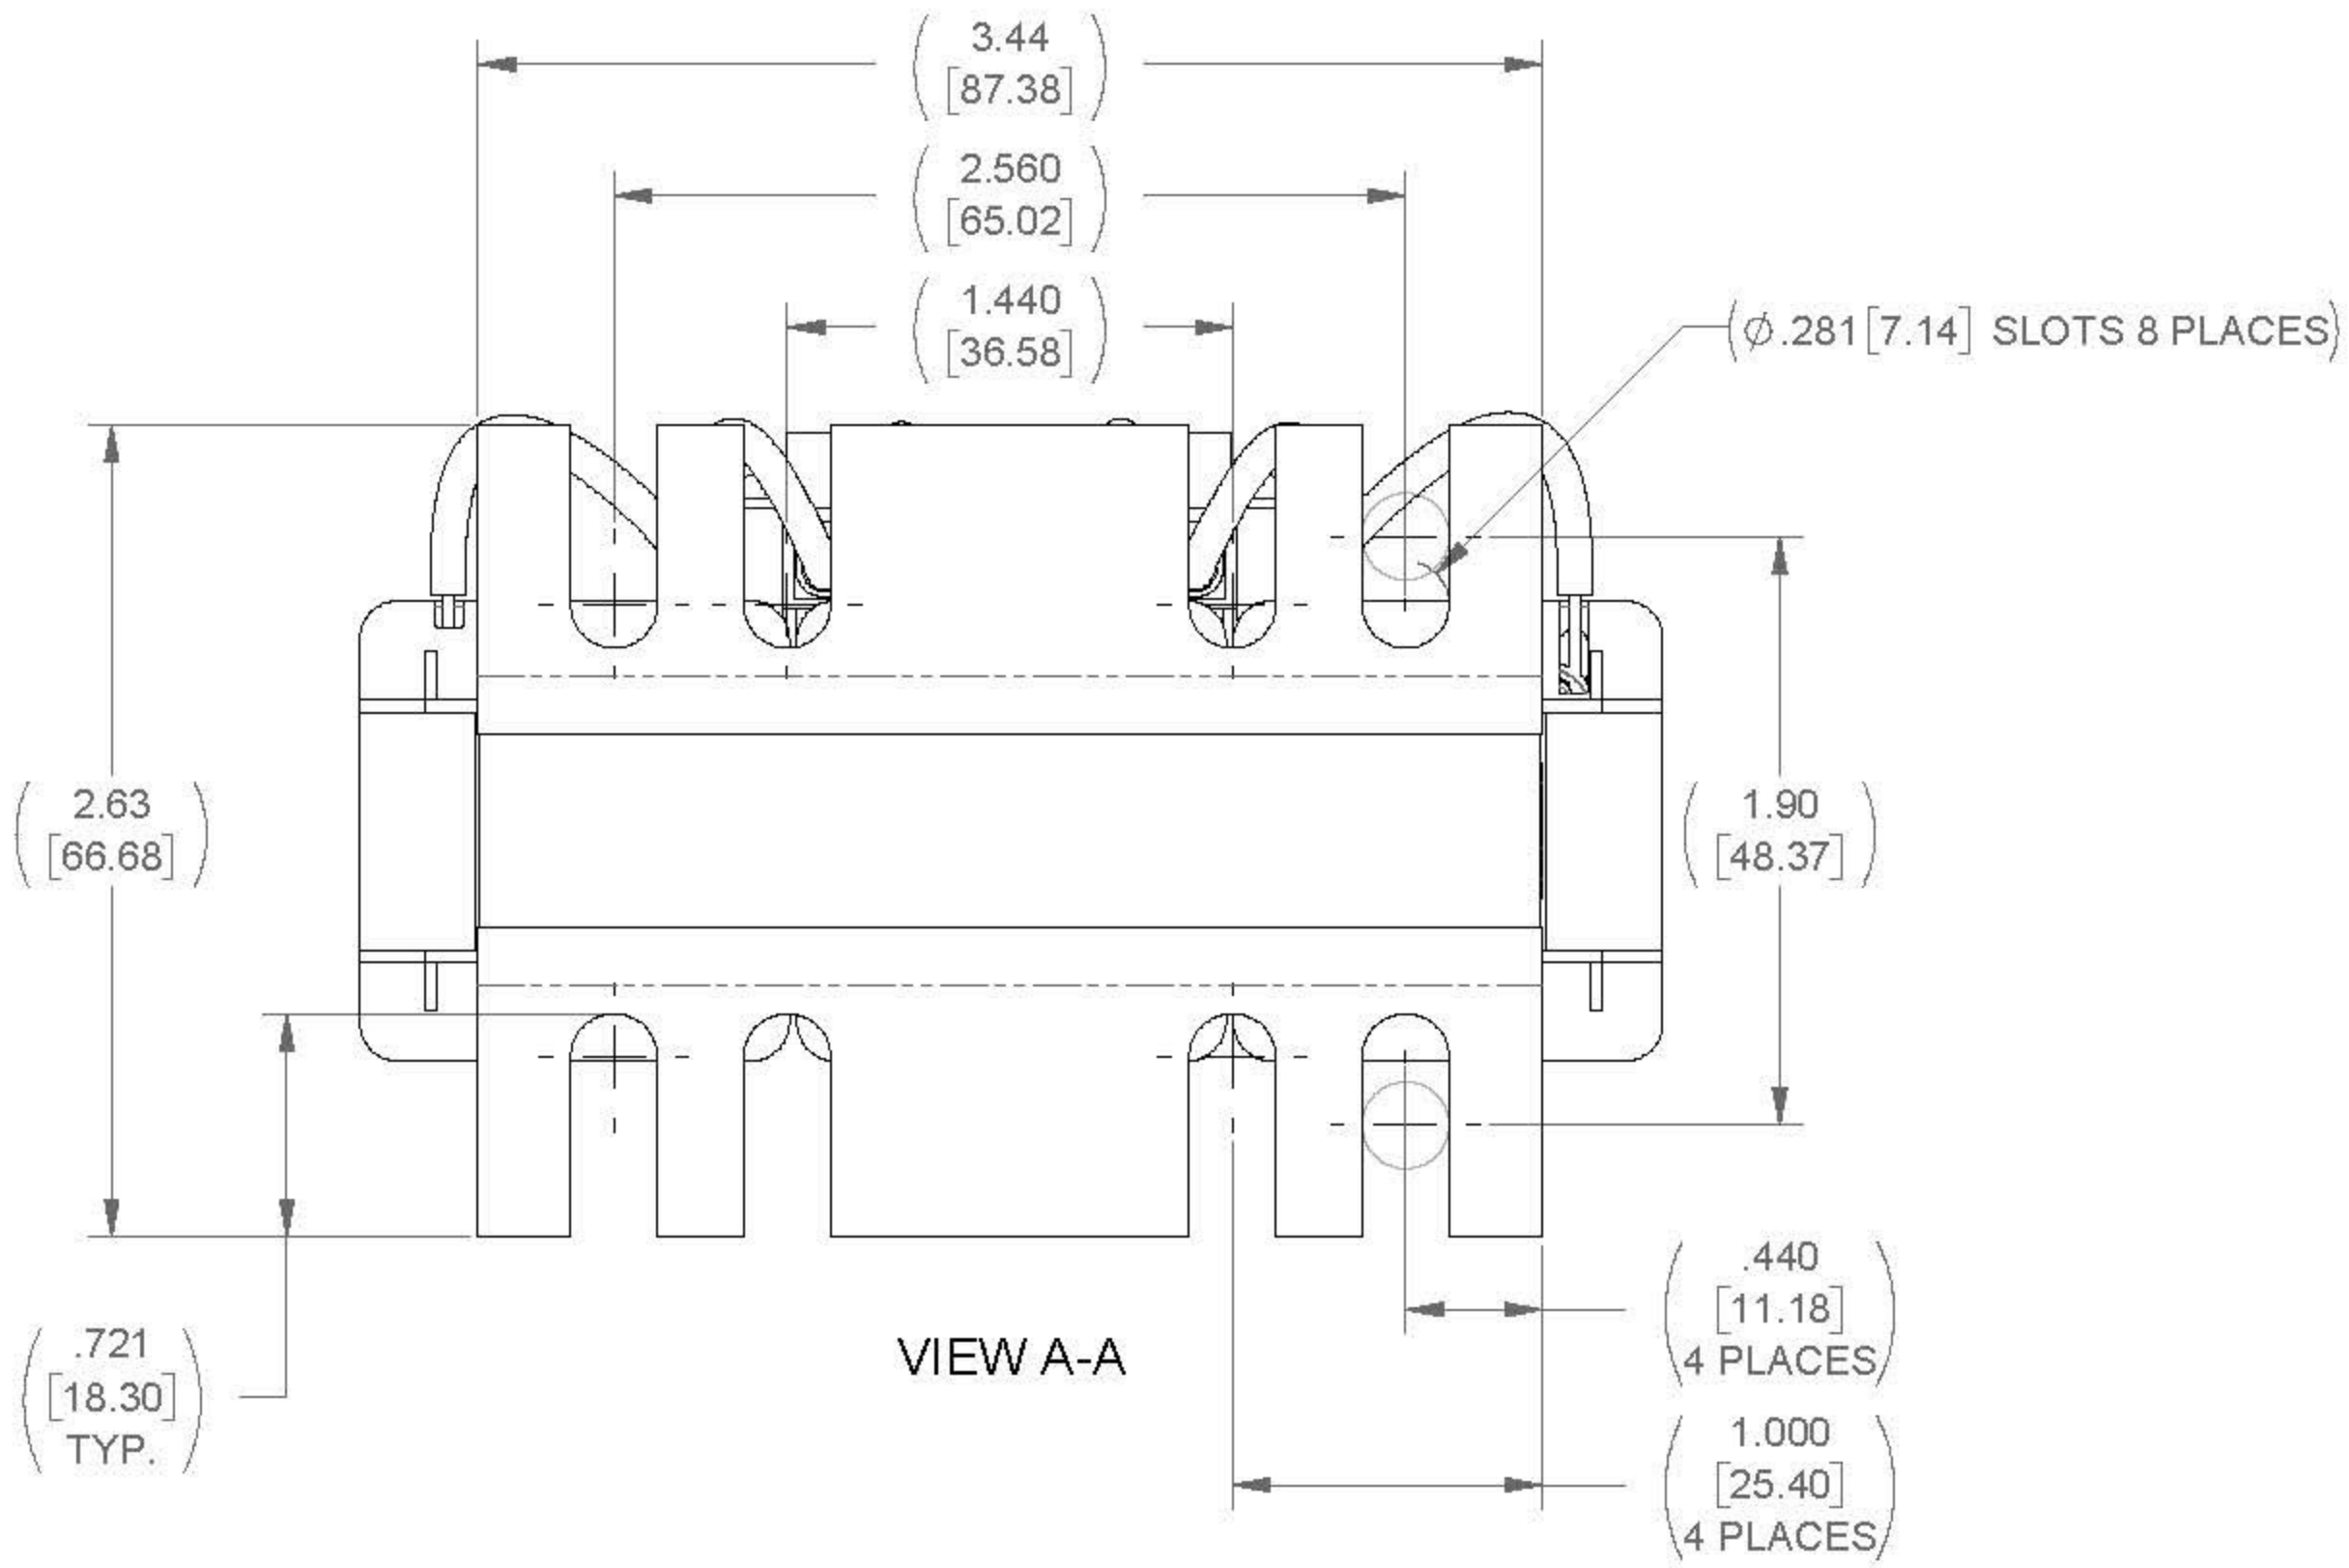
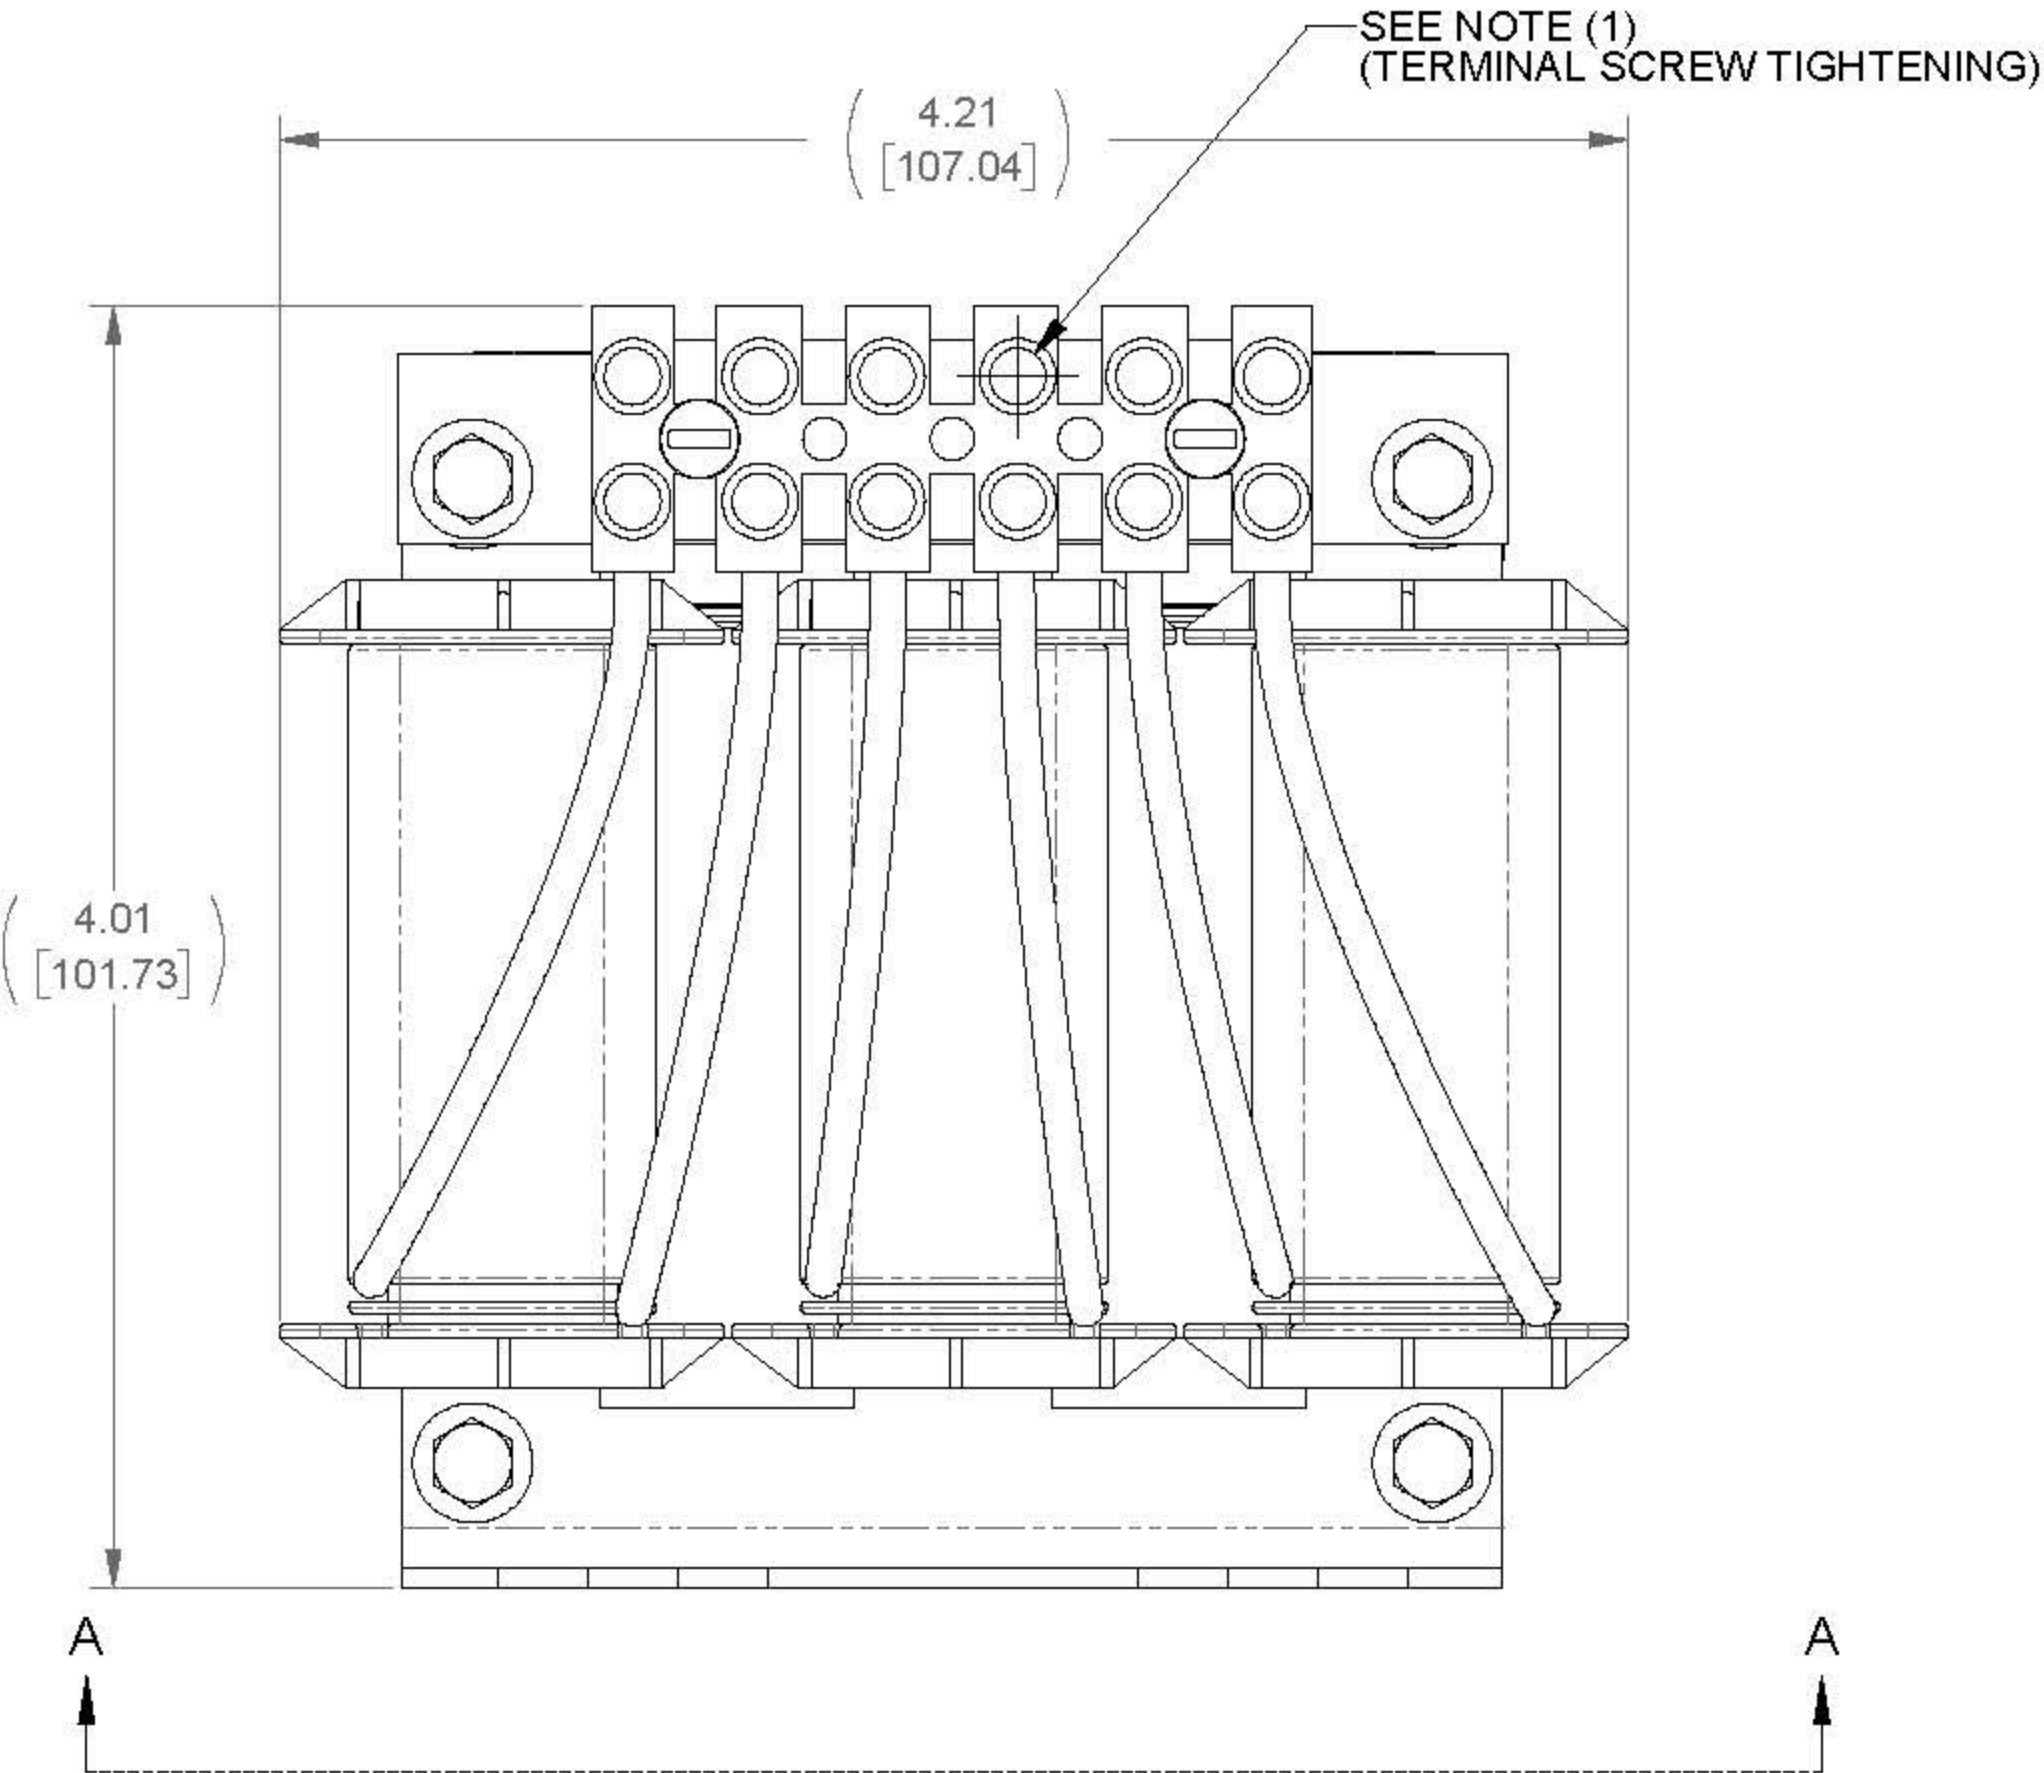


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
4	6.5 mH	20

ECO No	DESCRIPTION	REV BY	DATE
M8306	REDRAW IN SOLIDWORKS	JP	12/06/12

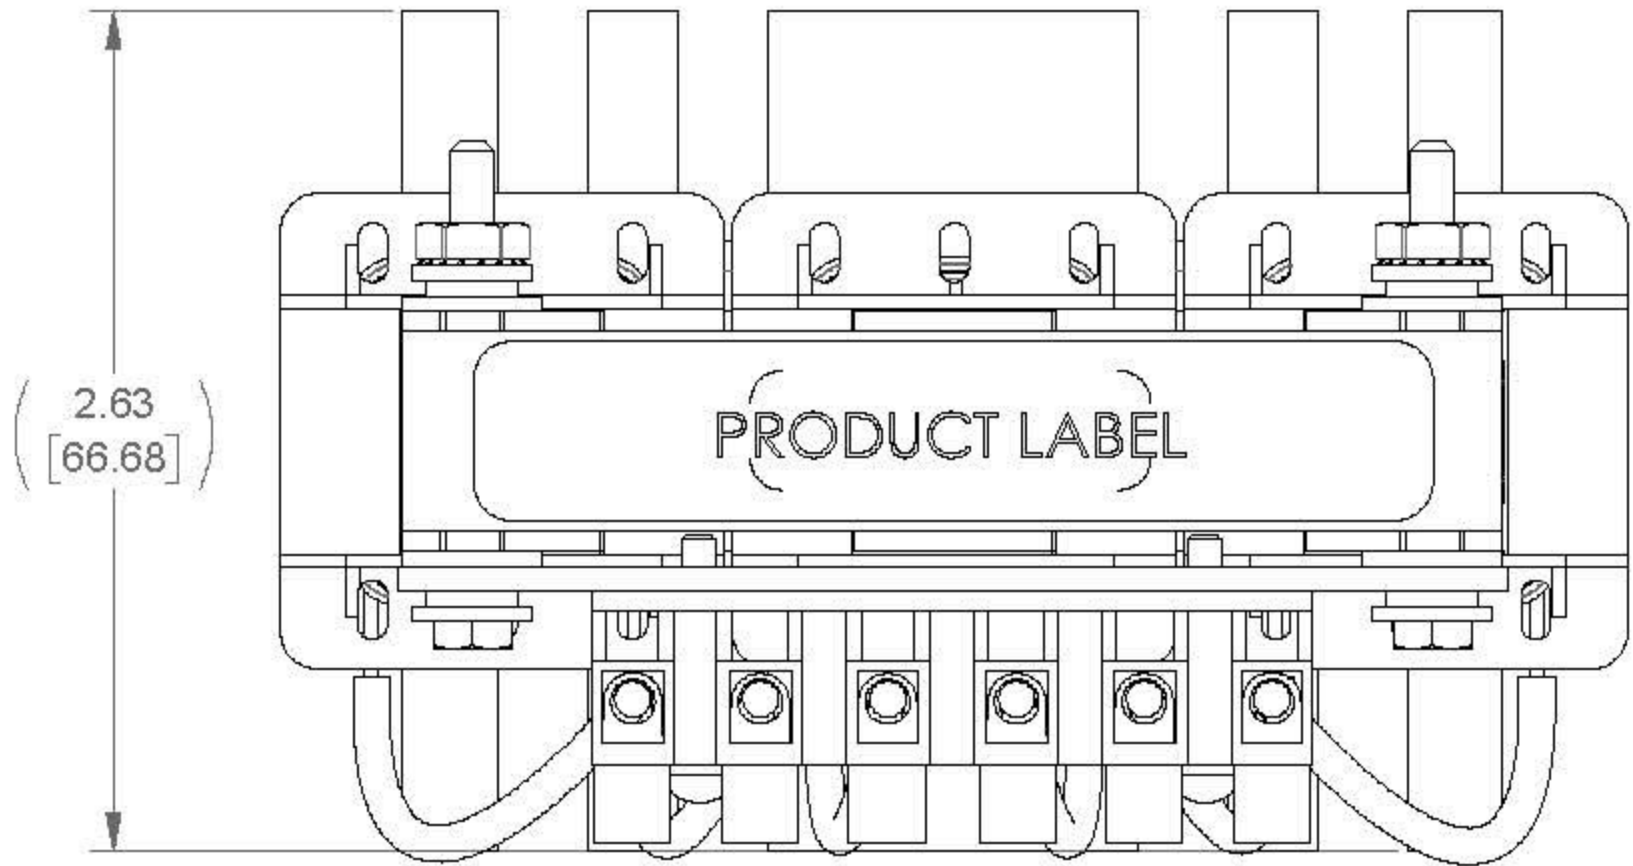

- NOTES:
- 1) TERMINAL SCREW TIGHTENING TORQUE: 4.5 in-lbs MAX
 - 2) WIRE RANGE: 22 - 10 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:				3 PHASE REACTOR	
ANGLES: ± 1 °		DRAWN	DATE		
1 PLACE .X: ± .1 [2.5]		JJB	11/07/97		
2 PLACE .XX: ± .03 [0.76]		CHECKED	DATE		
3 PLACE .XXX: ± .010 [0.254]		TM	12/14/12		
		APPROVED	DATE	SIZE	REV
		TM	12/14/12	D	17
				SCALE	
				5:3	

MTE
AN BL POWER ELECTRONICS COMPANY

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455.4693
262.253.8200

CD RL-00402

SHEET 1 OF 1