



APPROX. WEIGHT
(LBS)
80



ECO No	DESCRIPTION	REV BY	DATE
M11414	ADD MISSING WEIGHT	SM	12/07/18

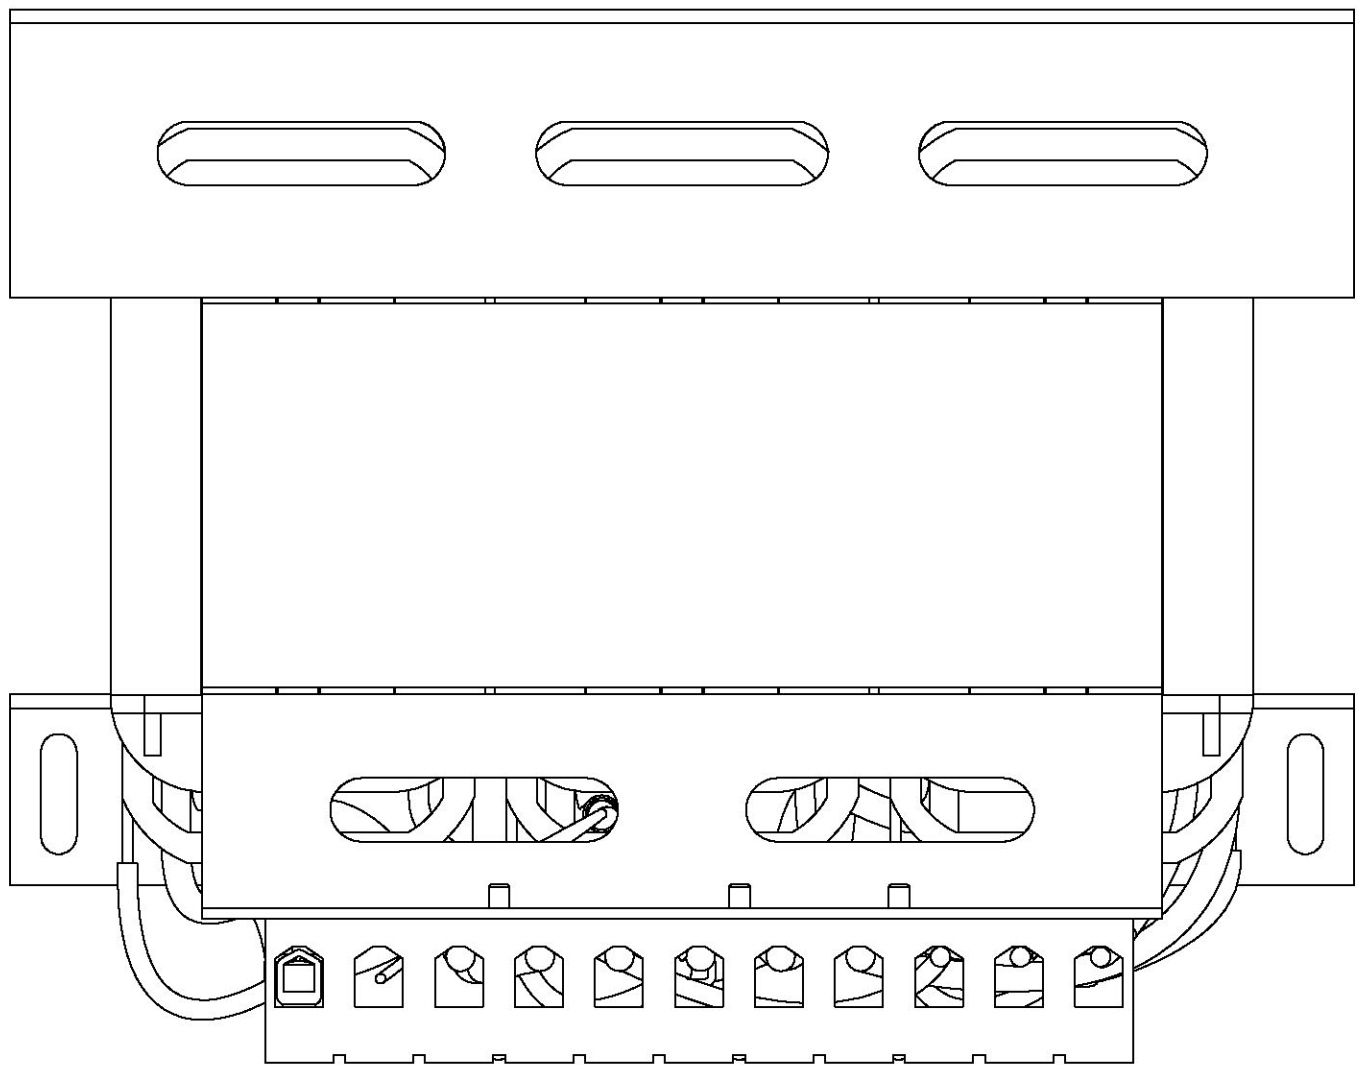


TOP VIEW

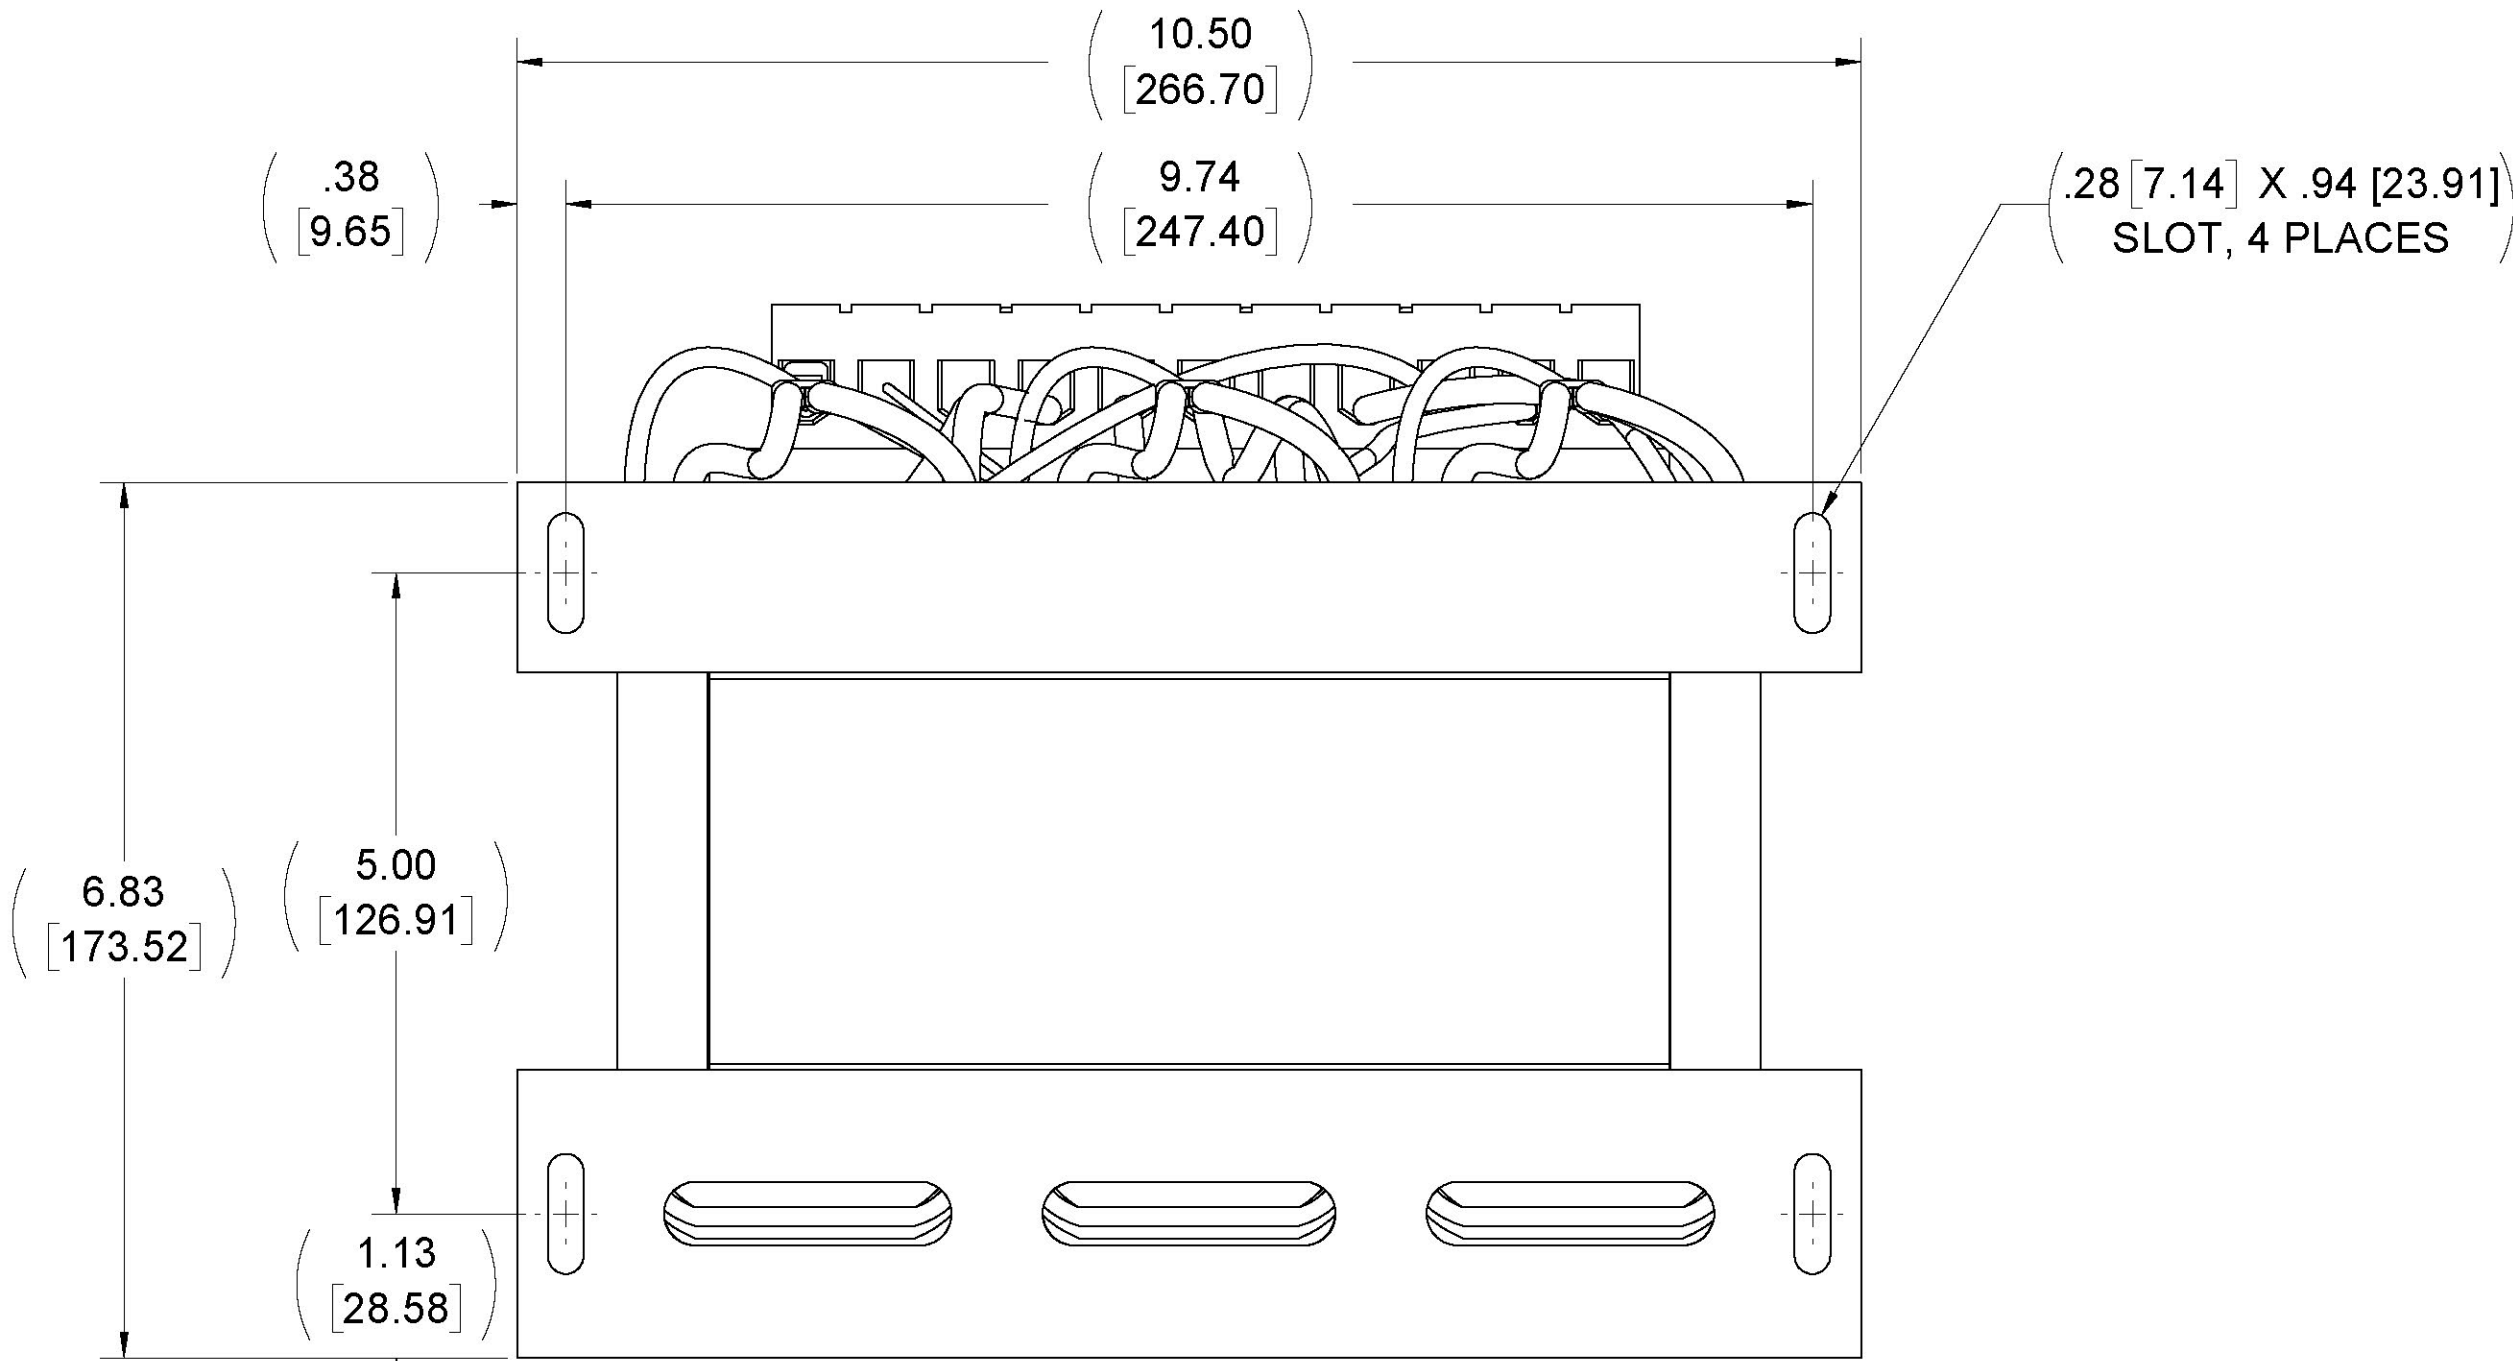


BOTTOM VIEW

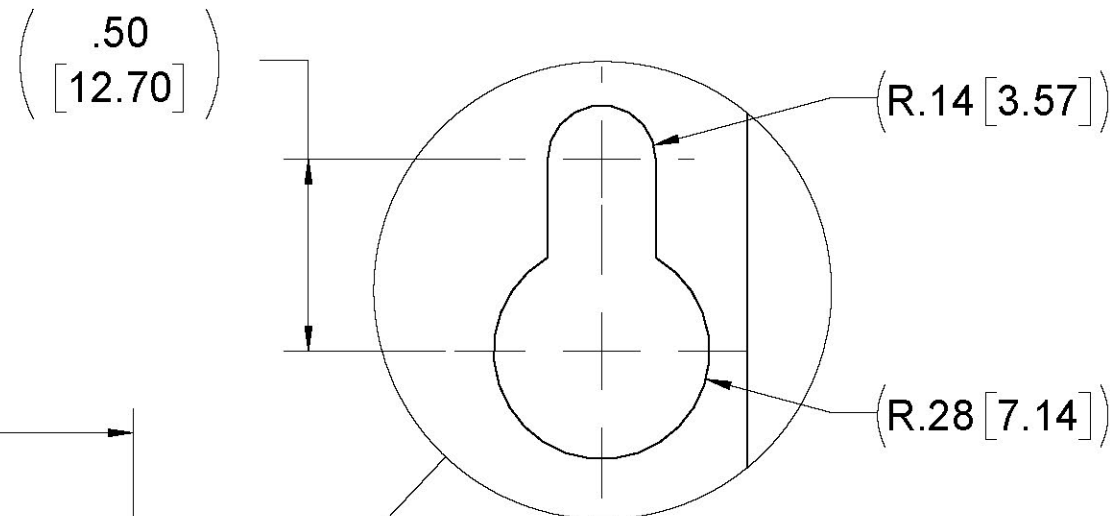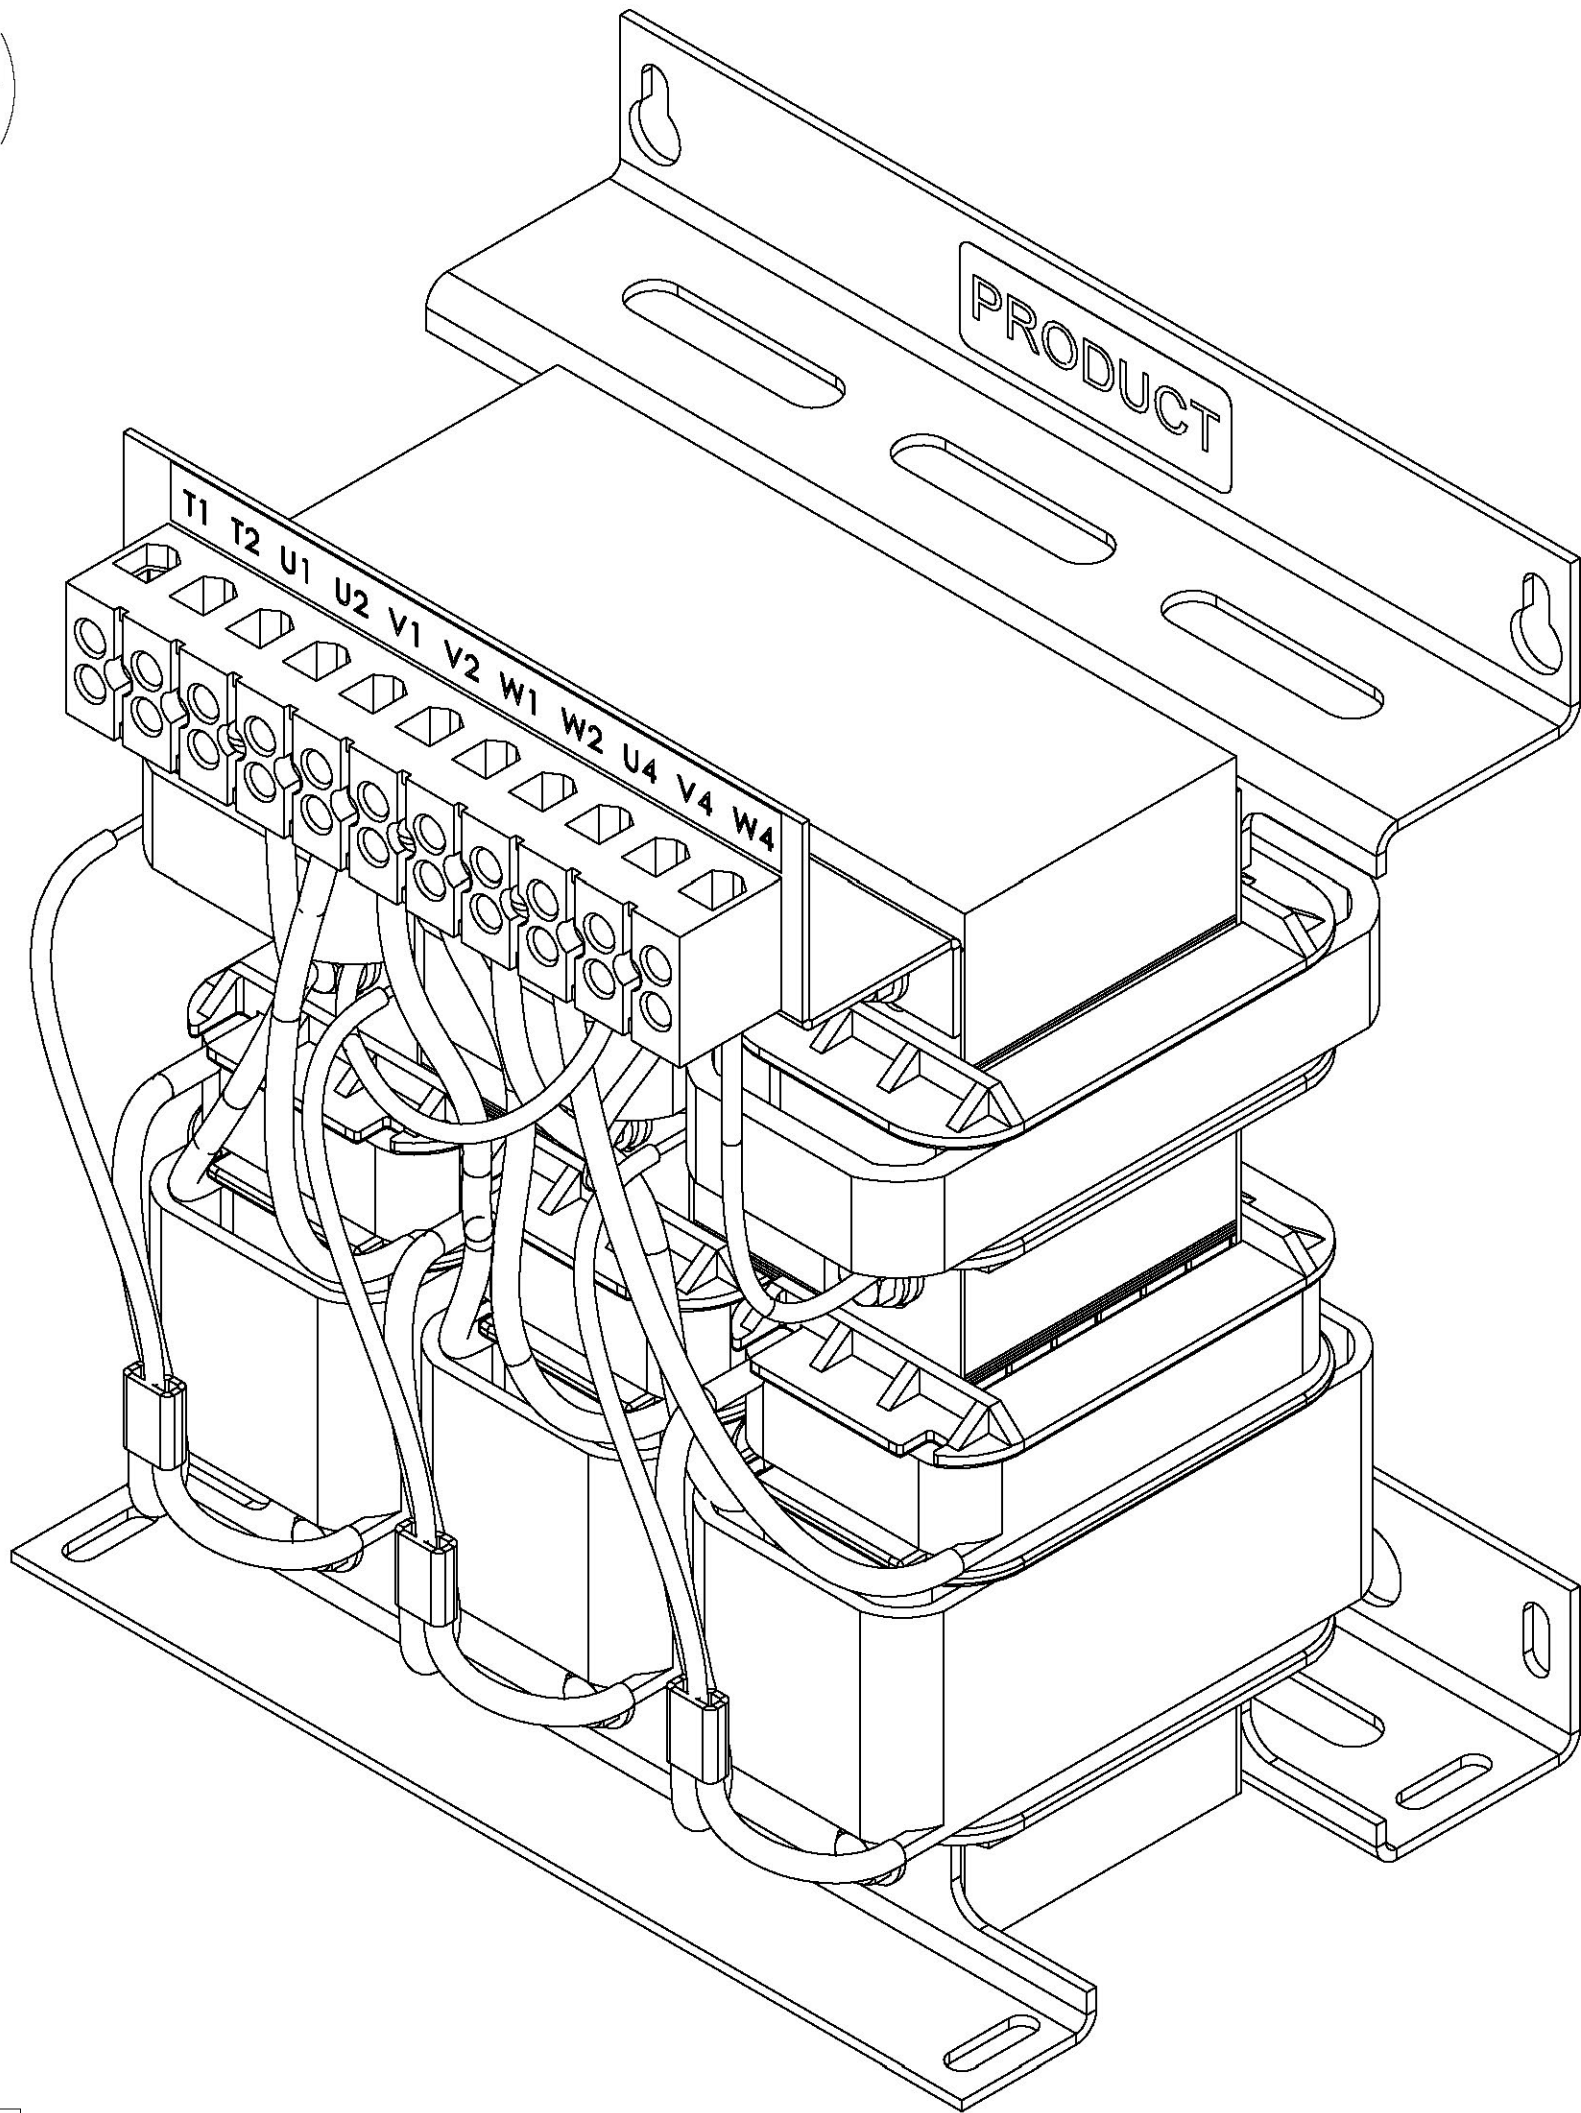


SEE NOTE 4

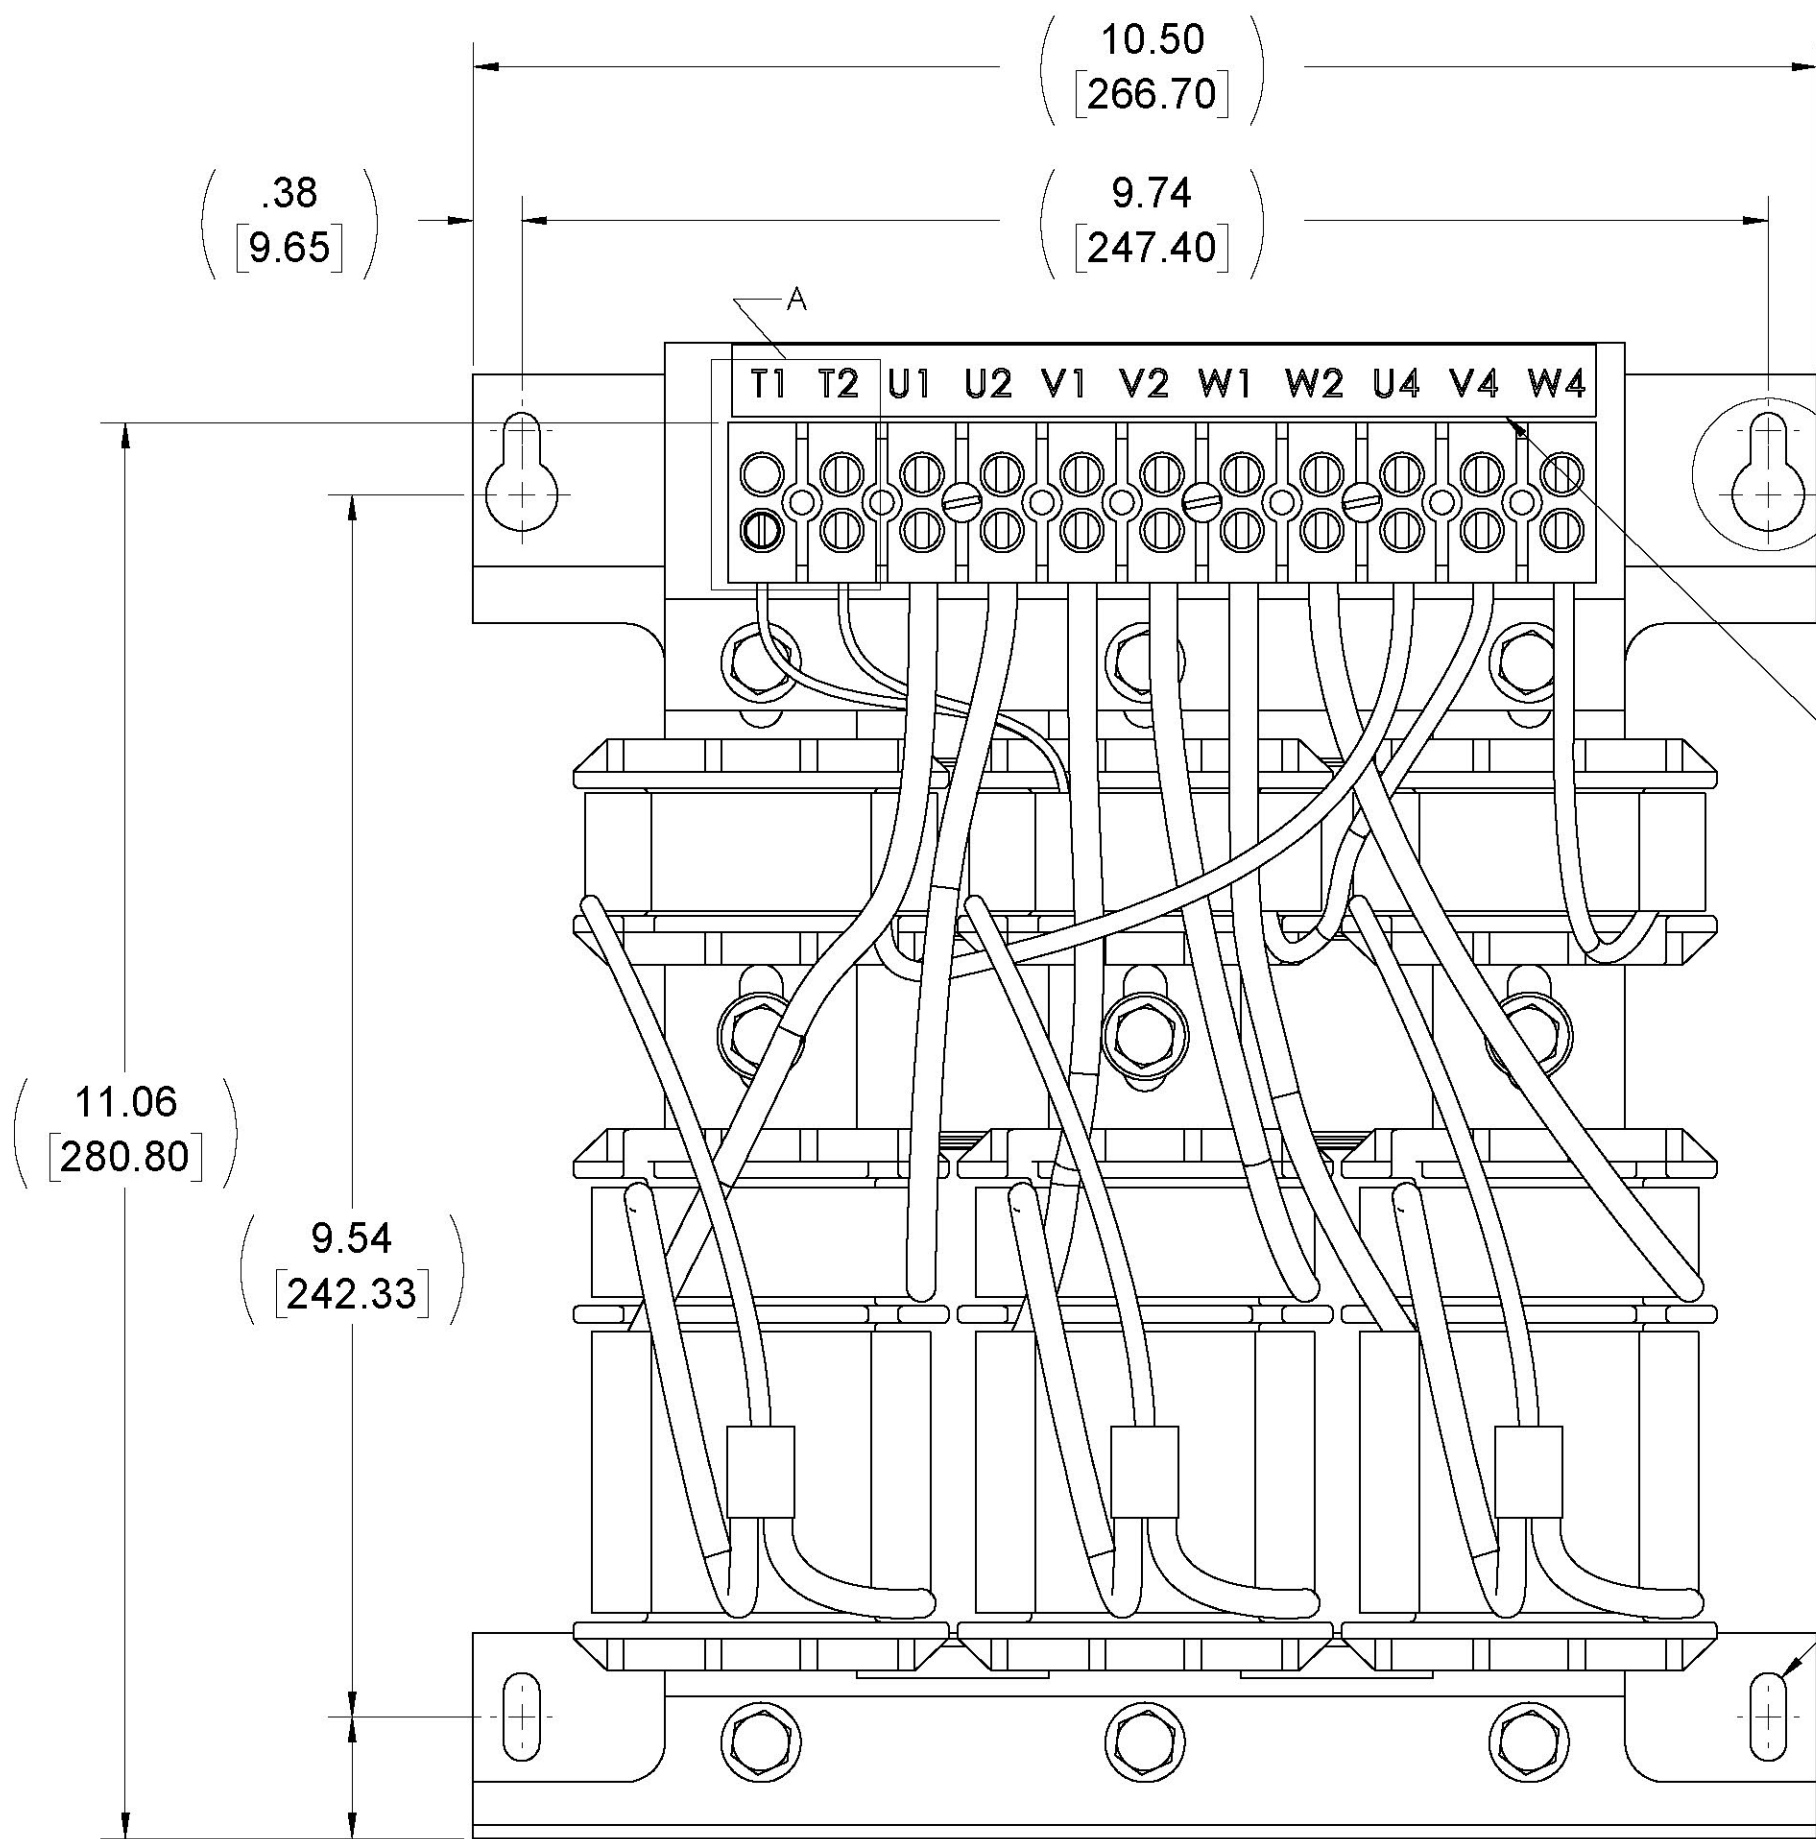

FRONT VIEW

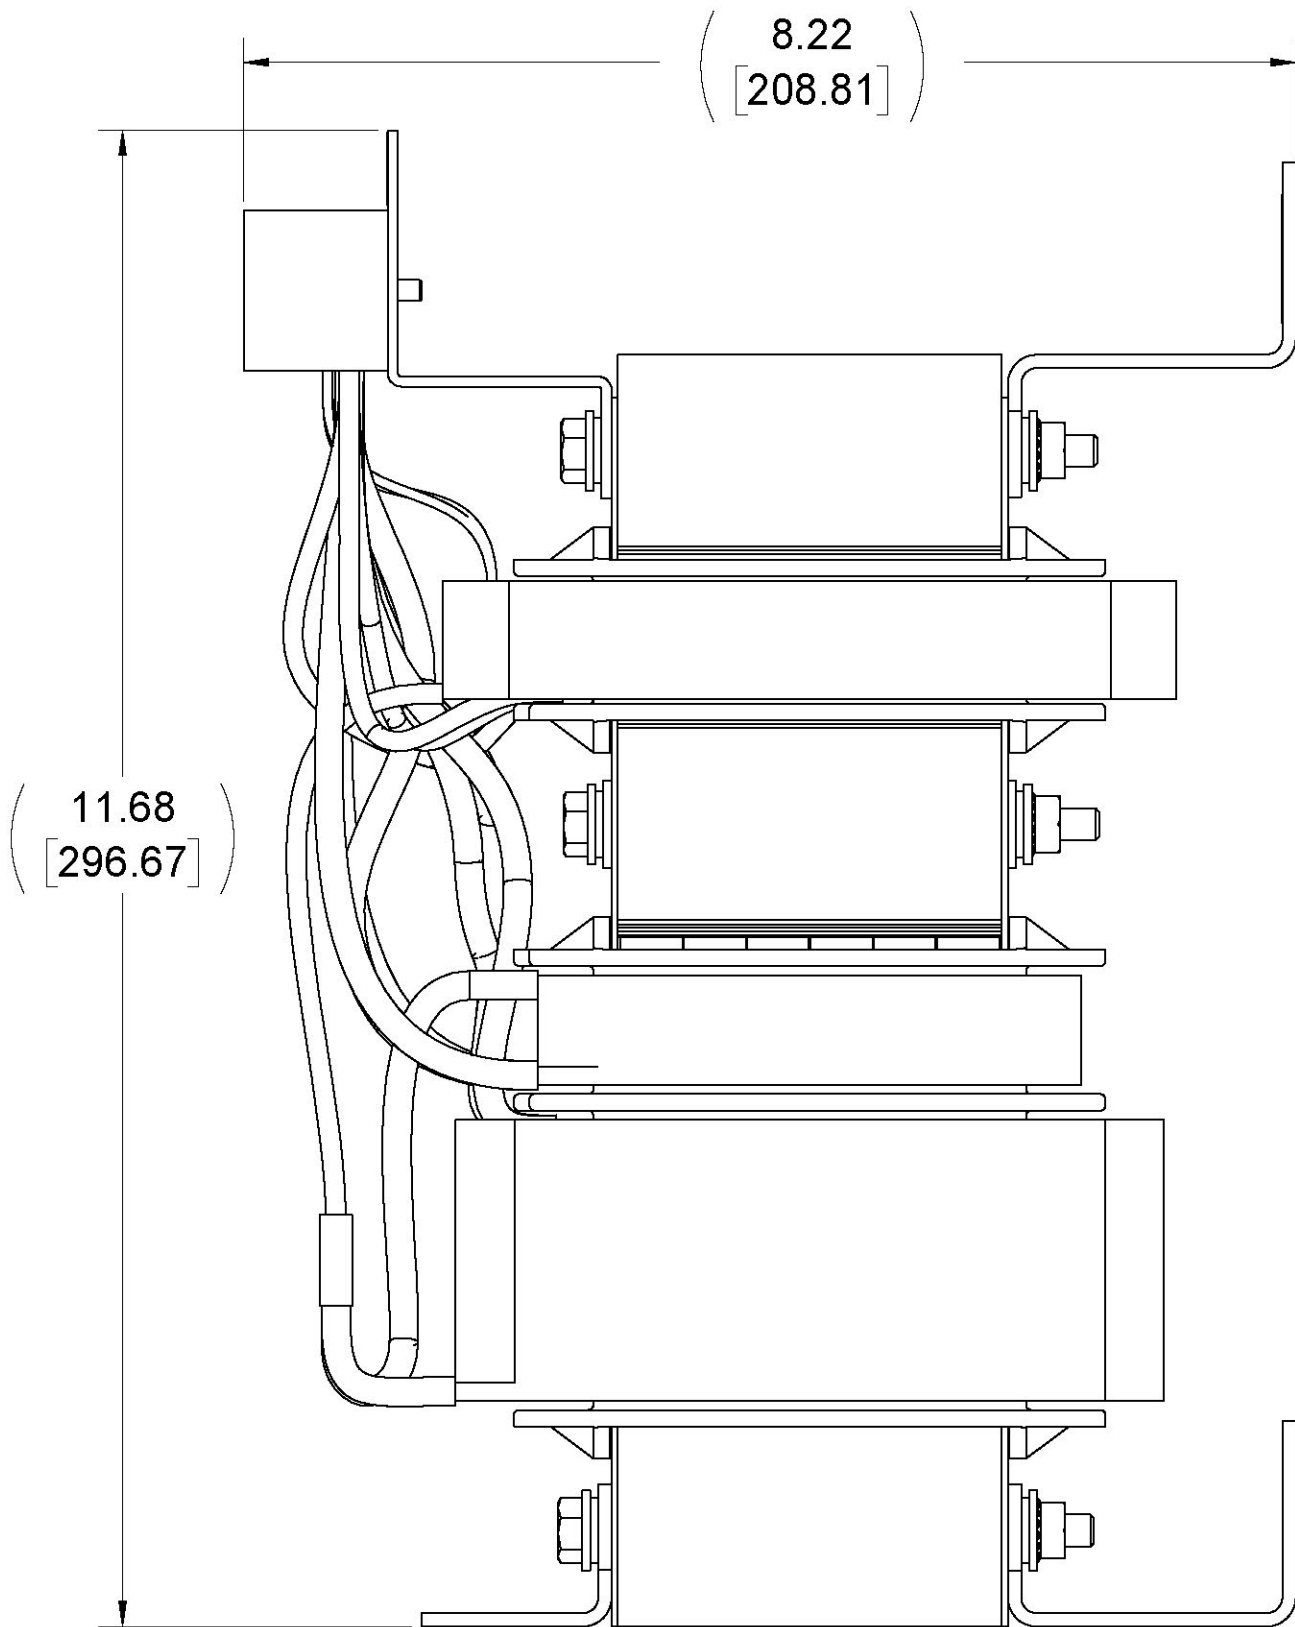

RIGHT SIDE VIEW

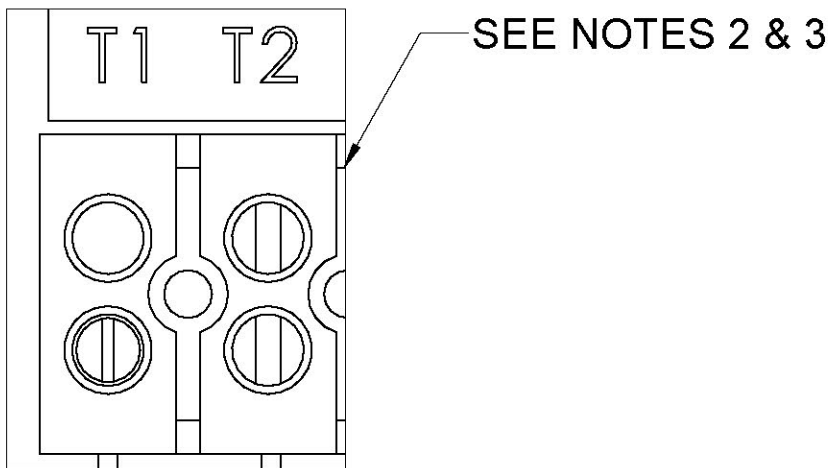

DETAIL A
CUSTOMER CONNECTION
DETIAL VIEW (THERMAL)

NOTES:

1. FILTER REQUIRES CAPACITOR (CAP-344TP) (QTY. 1).
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
3. WIRE RANGE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		MTE POWER QUALITY. SOLVED. N83 W13330 Leon Road, Menomonee Falls, WI 53051 USA 800.455-4883 262.253.8200		MATRIX AP 44A 480V 60HZ OPEN PANEL	
		DRAWN JP	DATE 05/10/12	SIZE D	DWG No. CD MAPP0044D
		CHECKED SM	DATE 12/07/18	SCALE 2:3	REV 03
		APPROVED AK	DATE 12/11/18	SHEET 1 OF 1	