

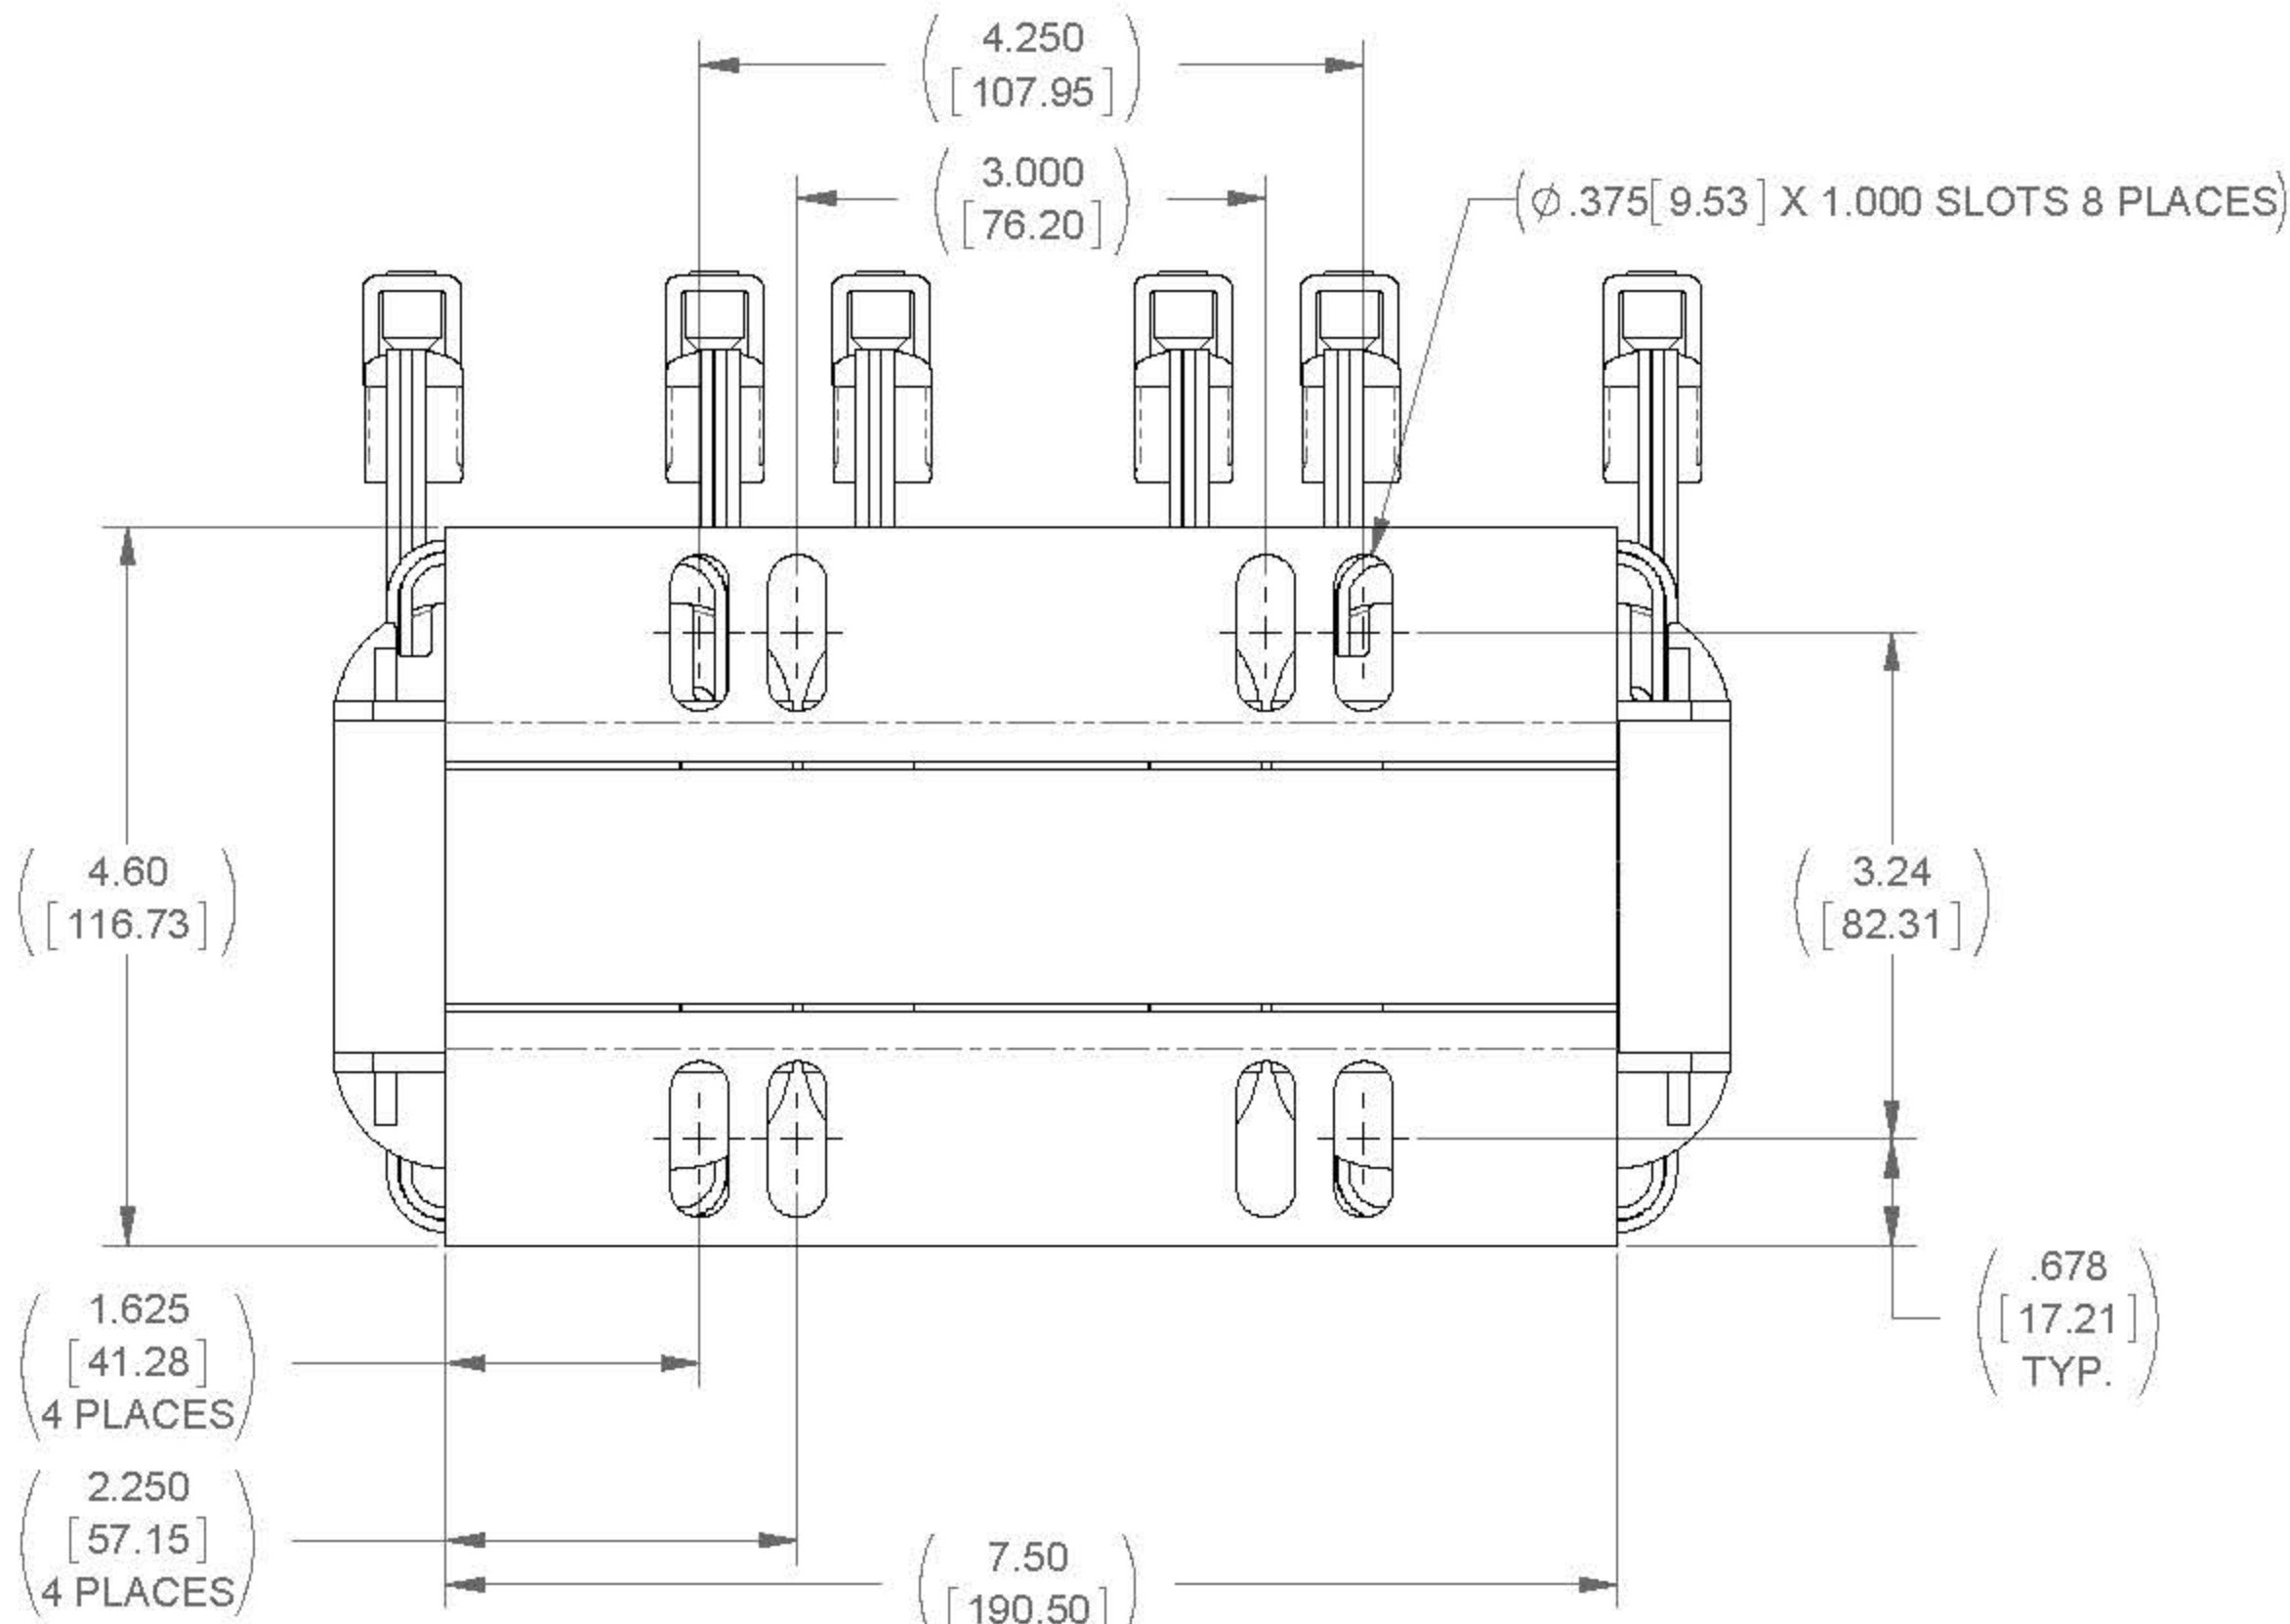
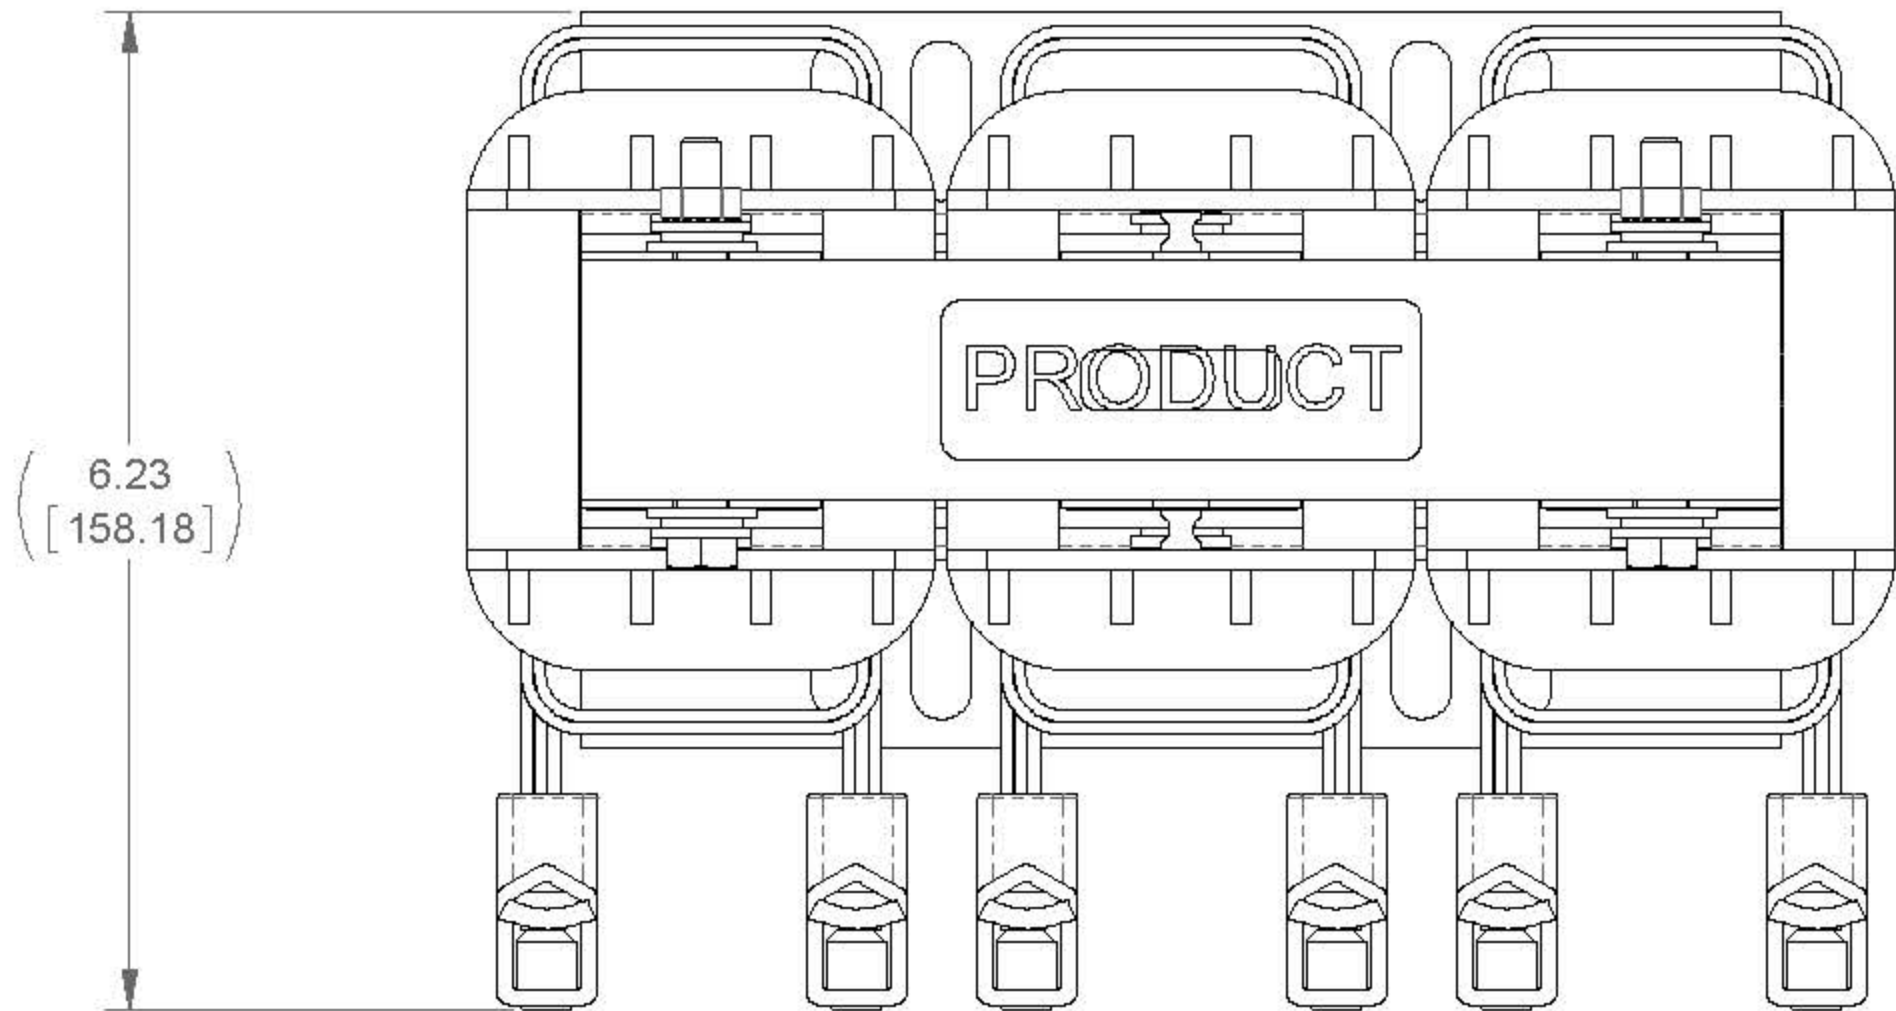


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
28	0.23mH	200

ECO No	DESCRIPTION	REV BY	DATE
M8240	REDRAW IN SOLIDWORKS	JP	10/12/12

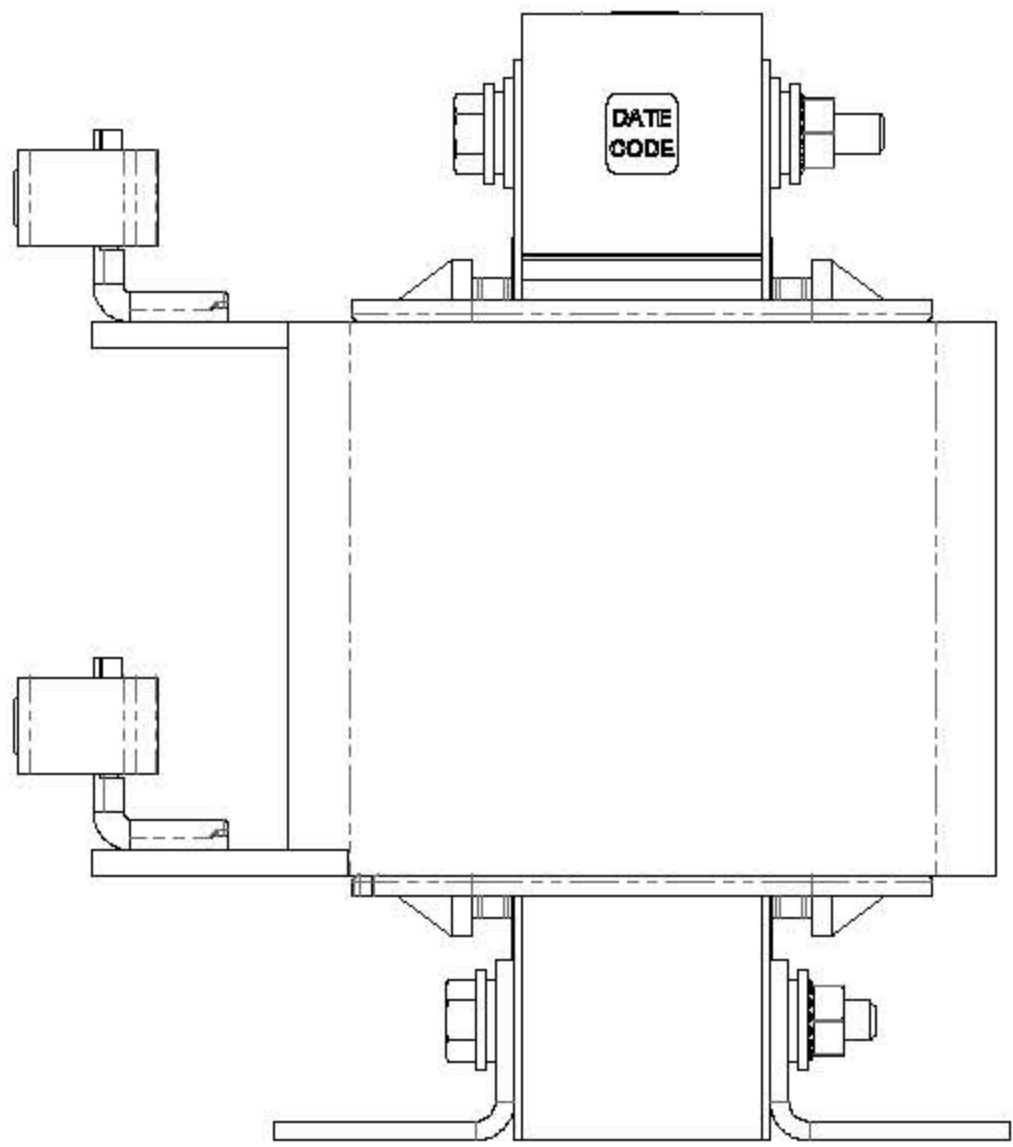

VIEW A-A

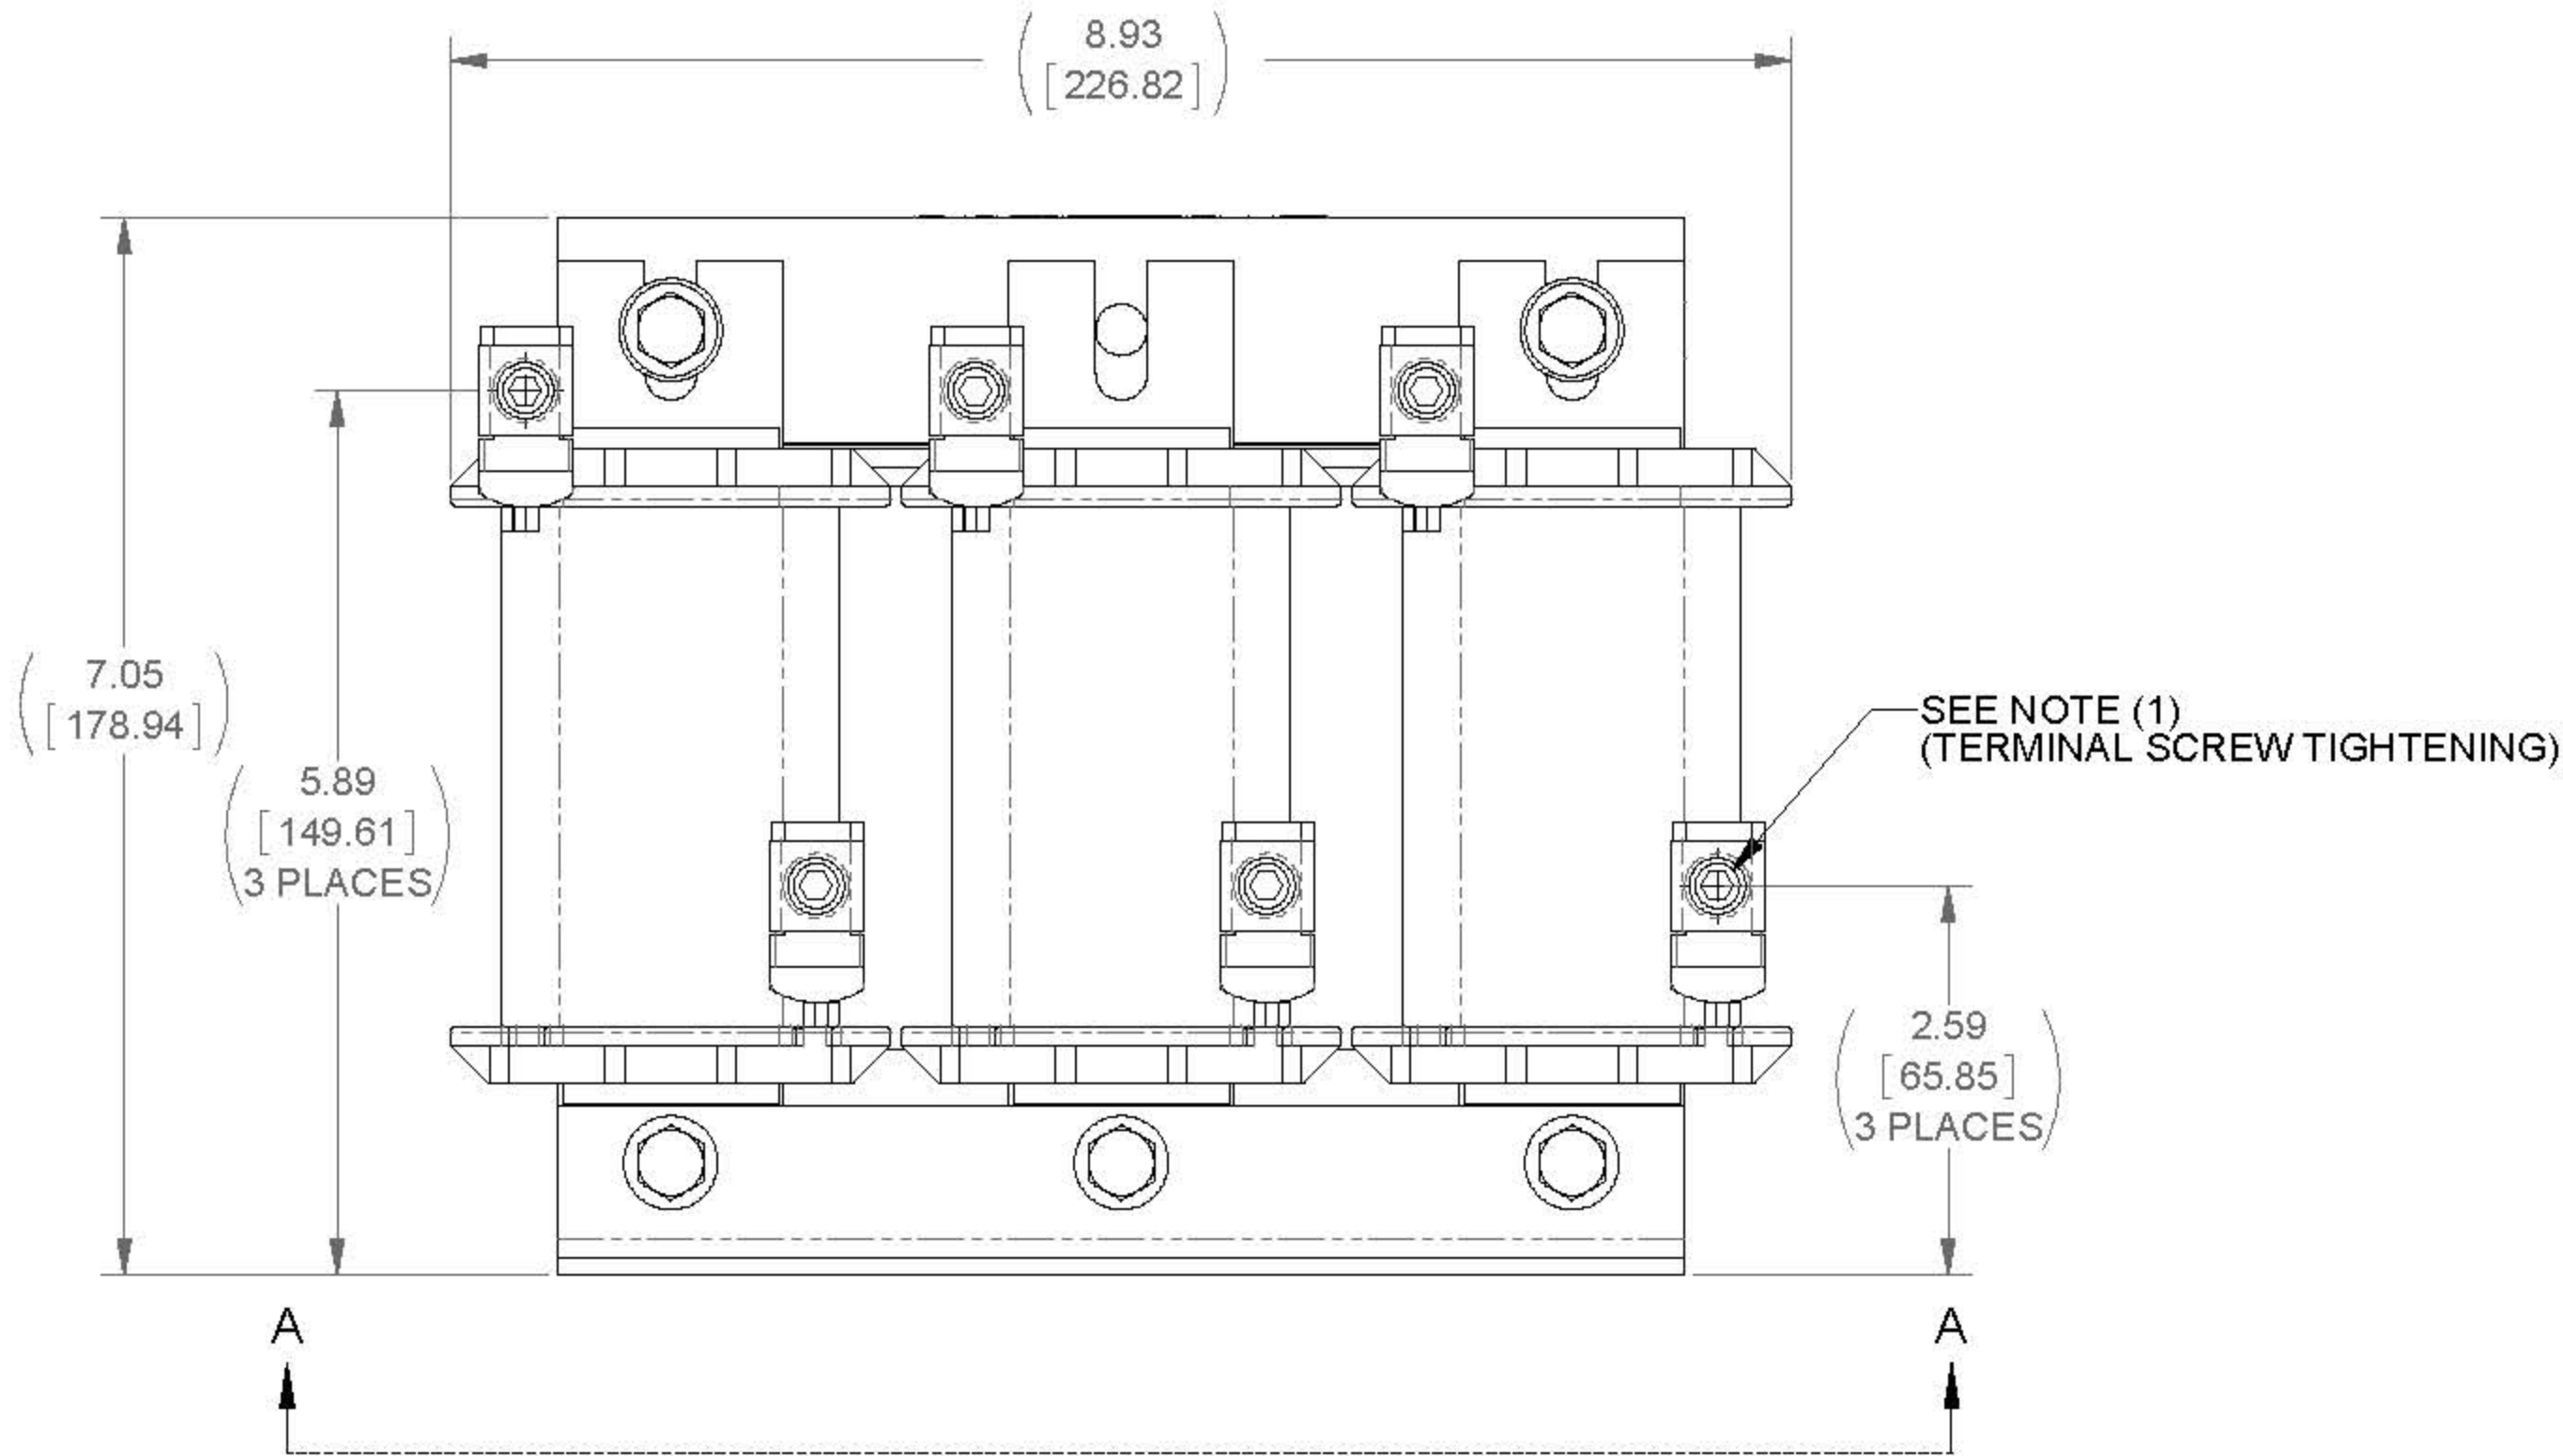

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE:
 - 6 - 4 (45) in-lbs MAX
 - 2 - 0 (50) in-lbs MAX
 2. WIRE RANGE: 6 - 0 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION		
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]  MTE AN BL POWER ELECTRONICS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		DRAWN RKT DATE 03/10/09		3 PHASE REACTOR		
		CHECKED TM DATE 10/22/12				
		APPROVED TM DATE 10/22/12		SIZE D DWG No. CD RLW-010403		REV 03
				SCALE 5/6		SHEET 1 OF 1