
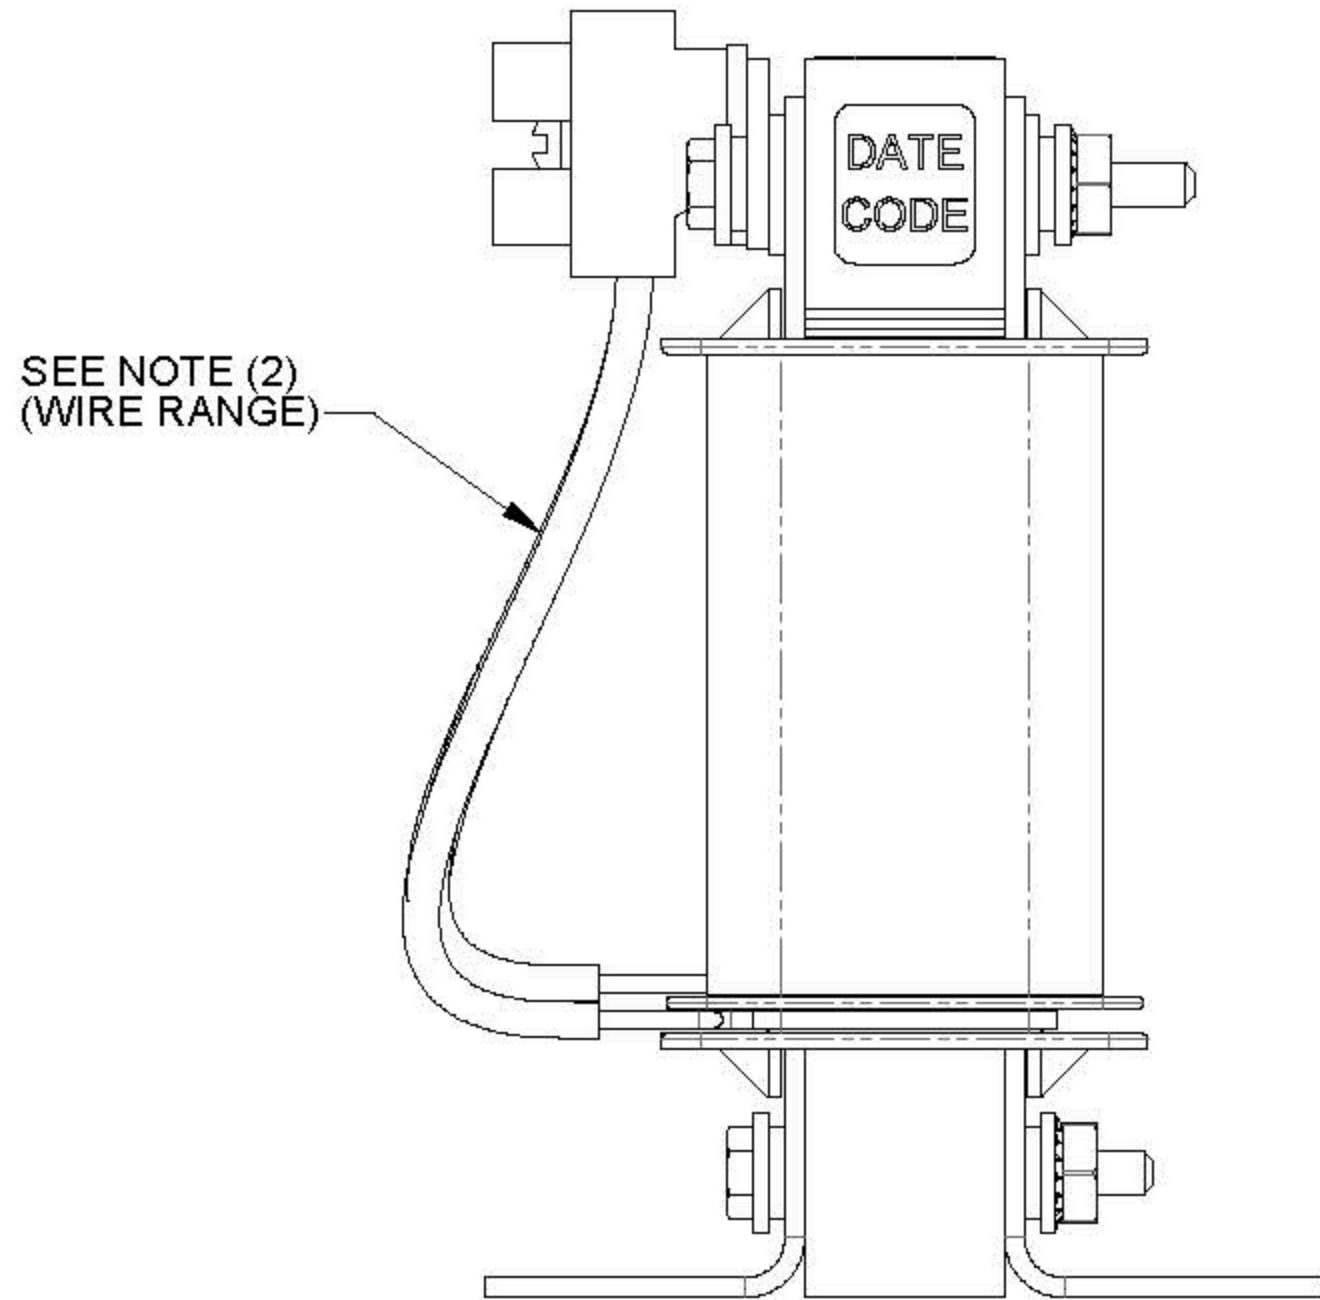
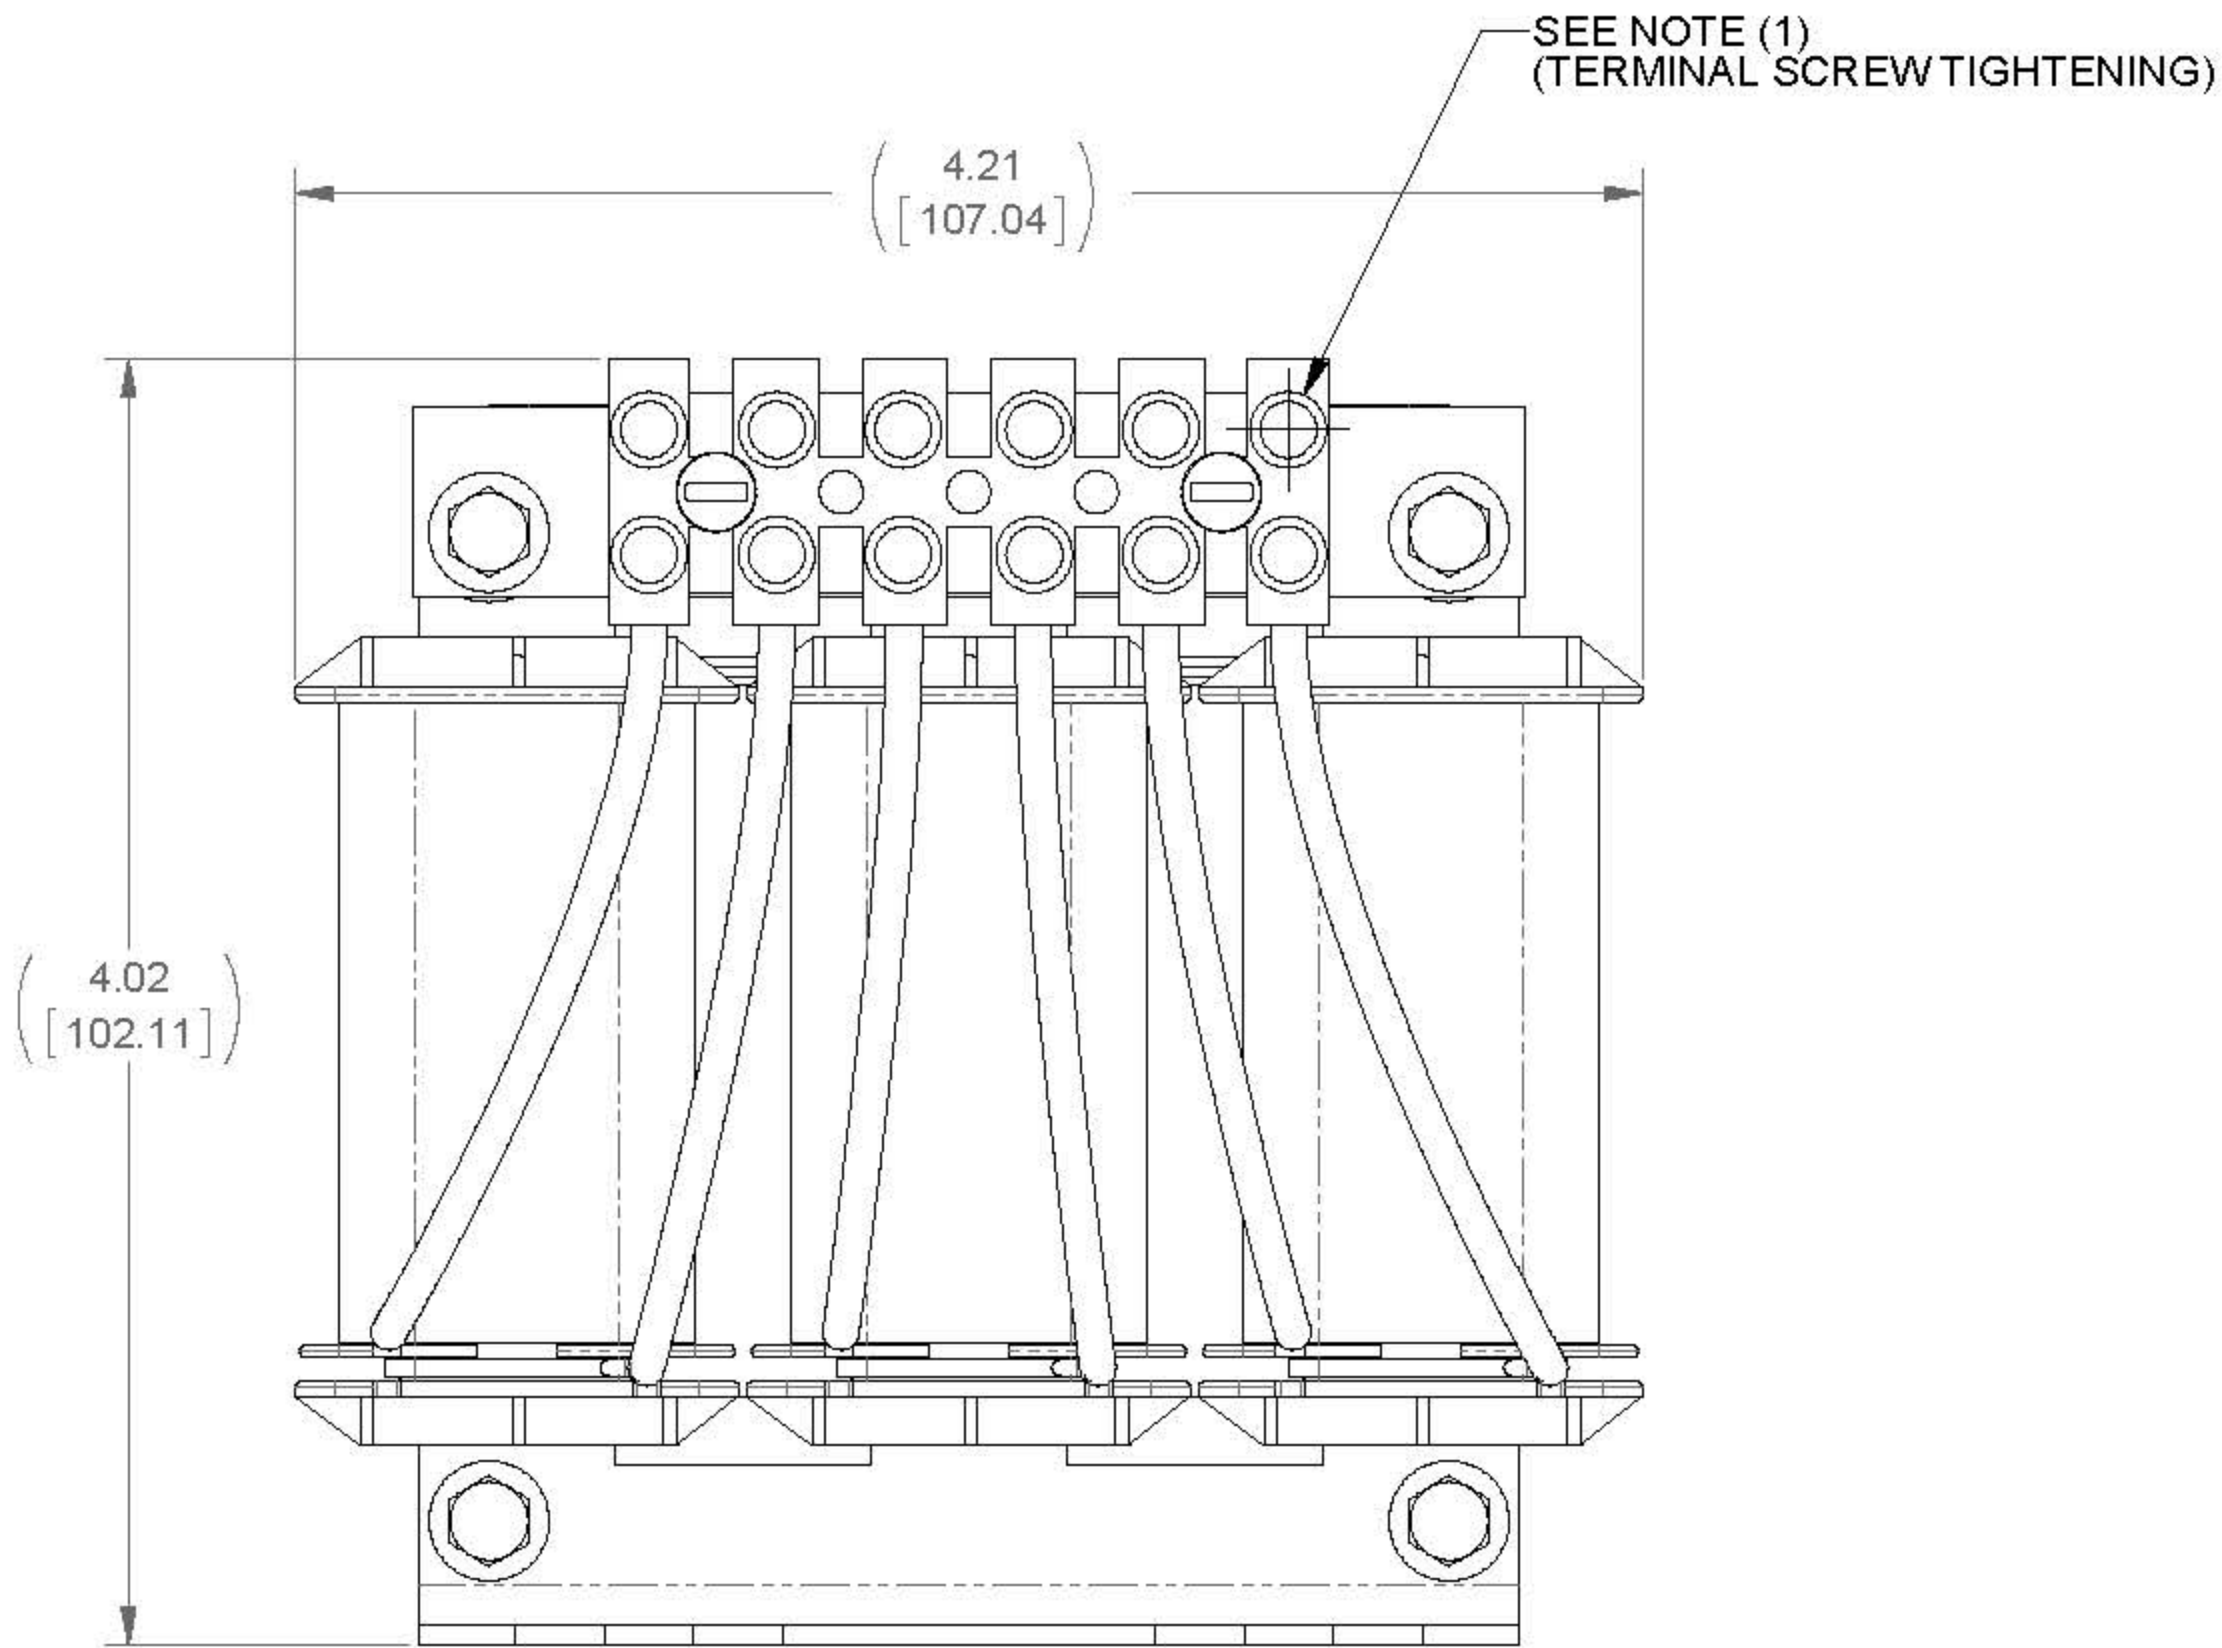
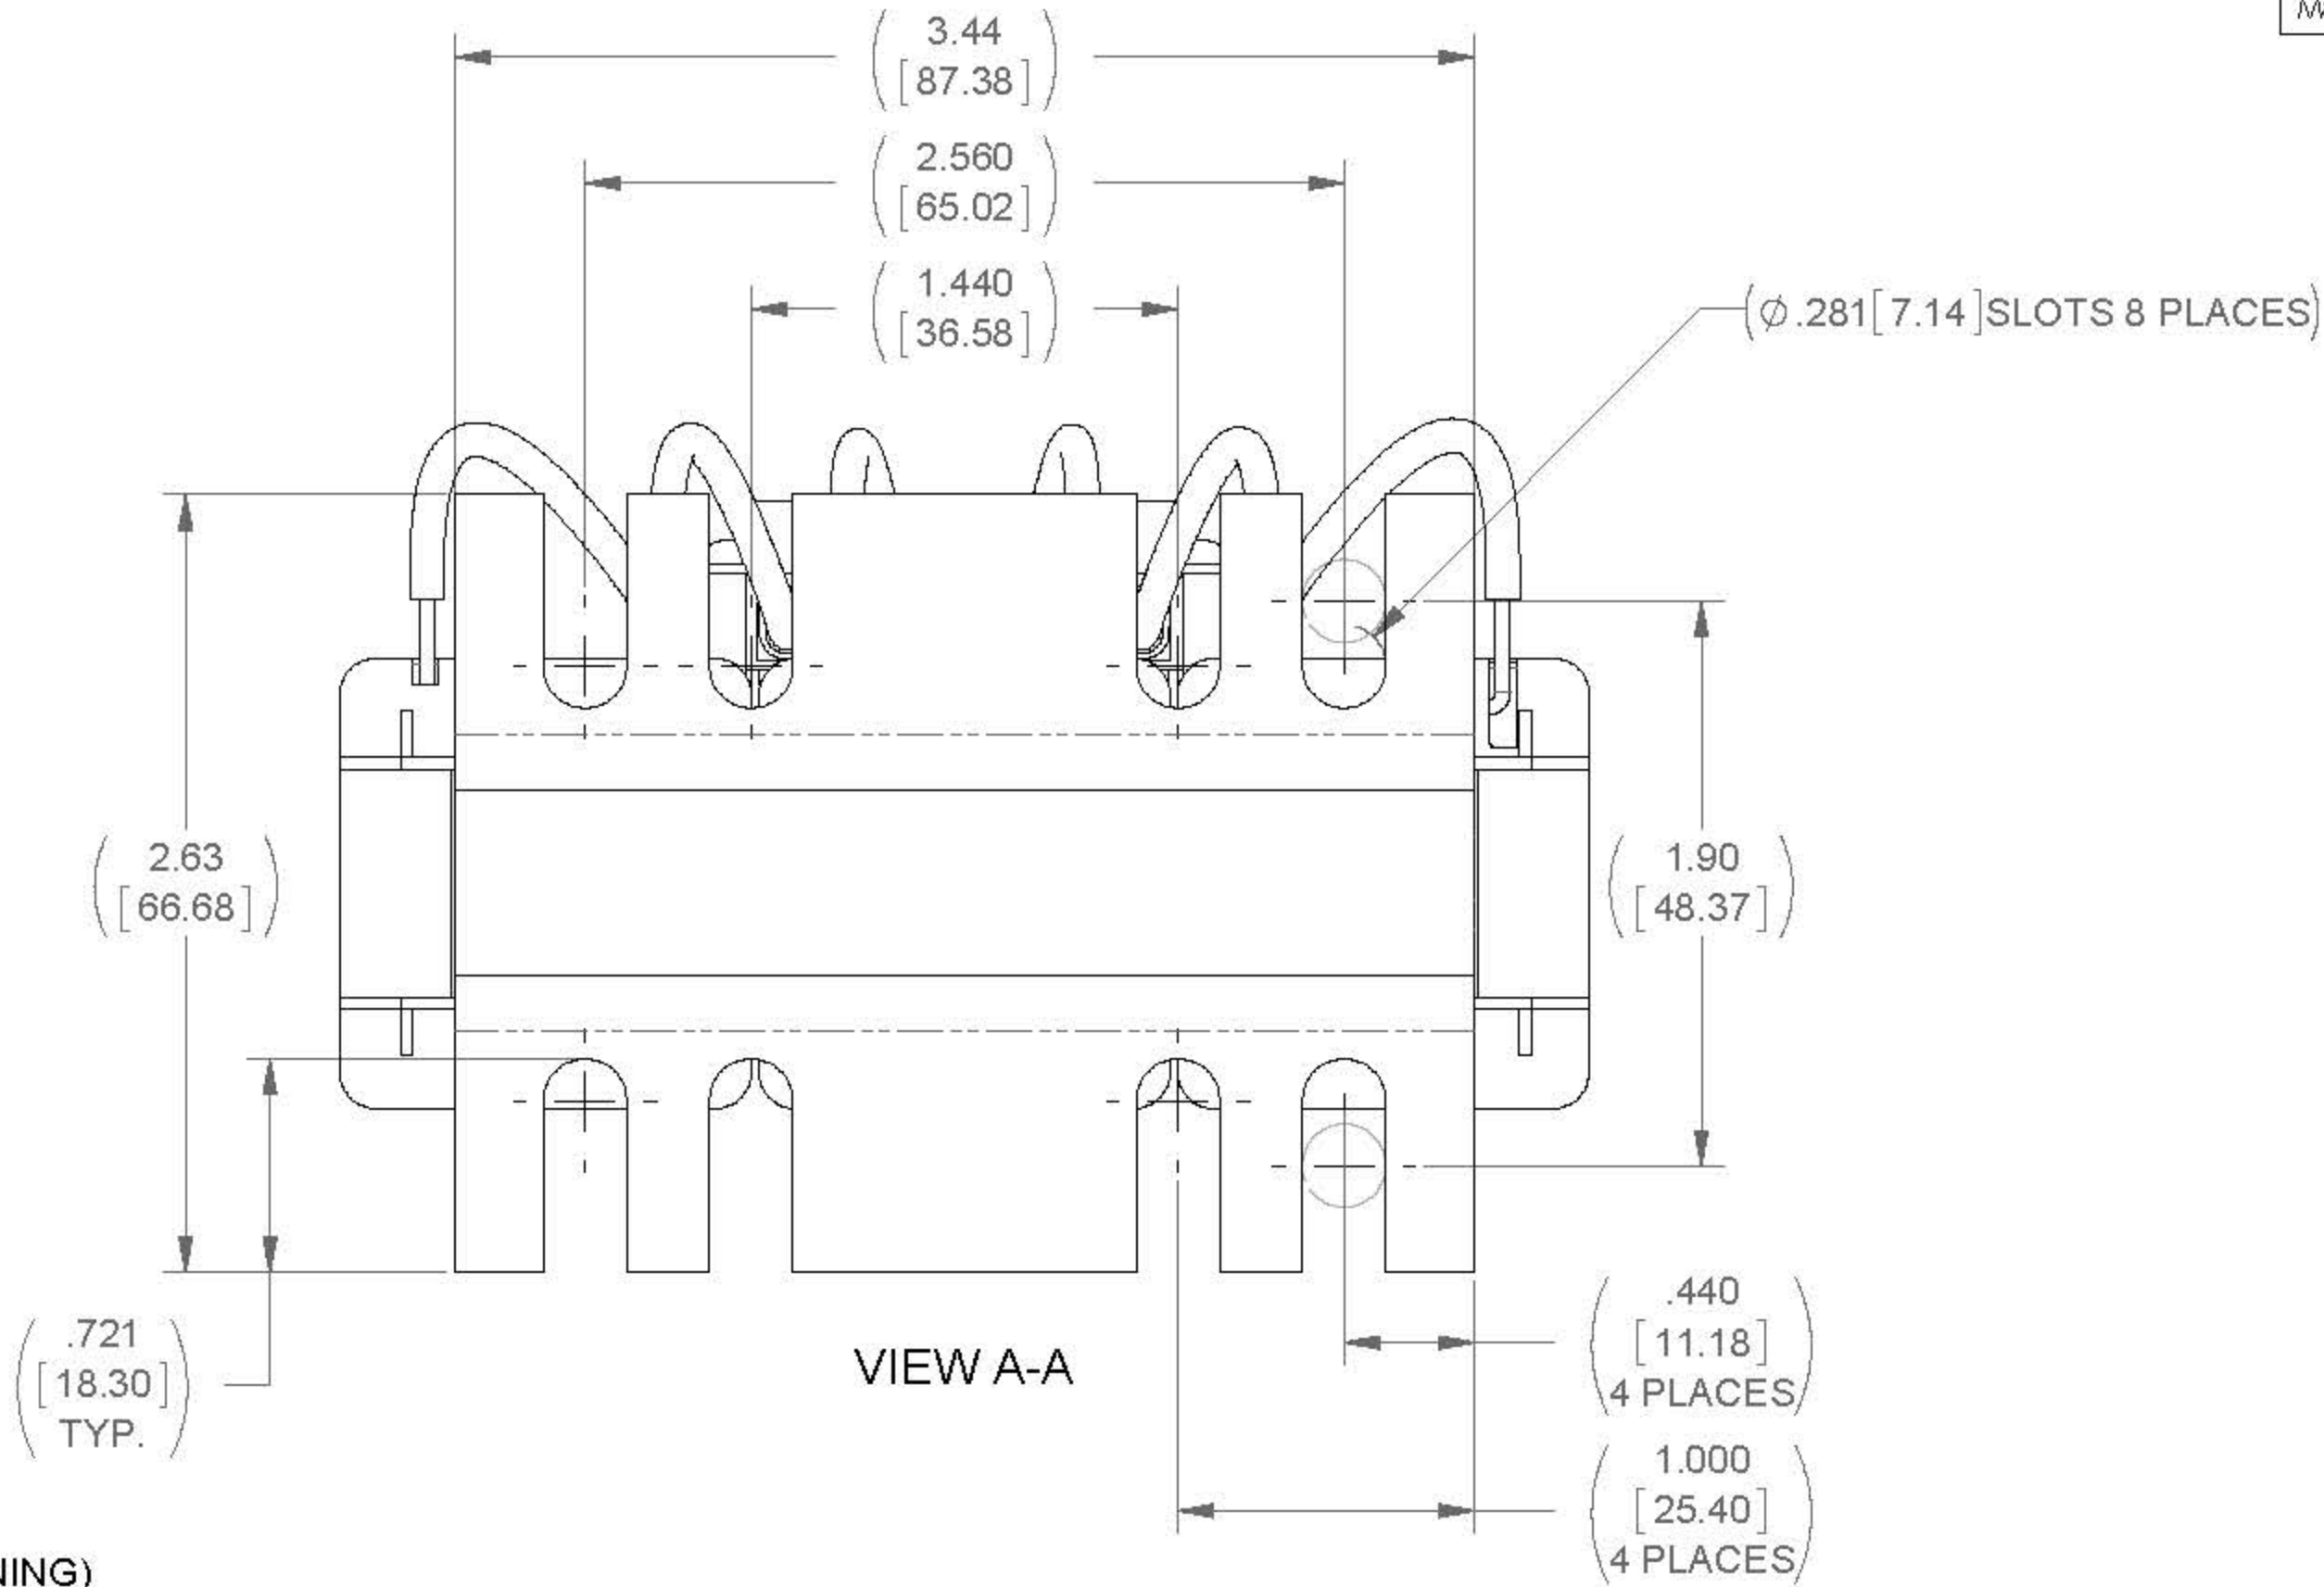


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
3	3mH	37.2

ECO No	DESCRIPTION	REVBY	DATE
M8321	DIMENSION CHANGE	JP	12/14/12

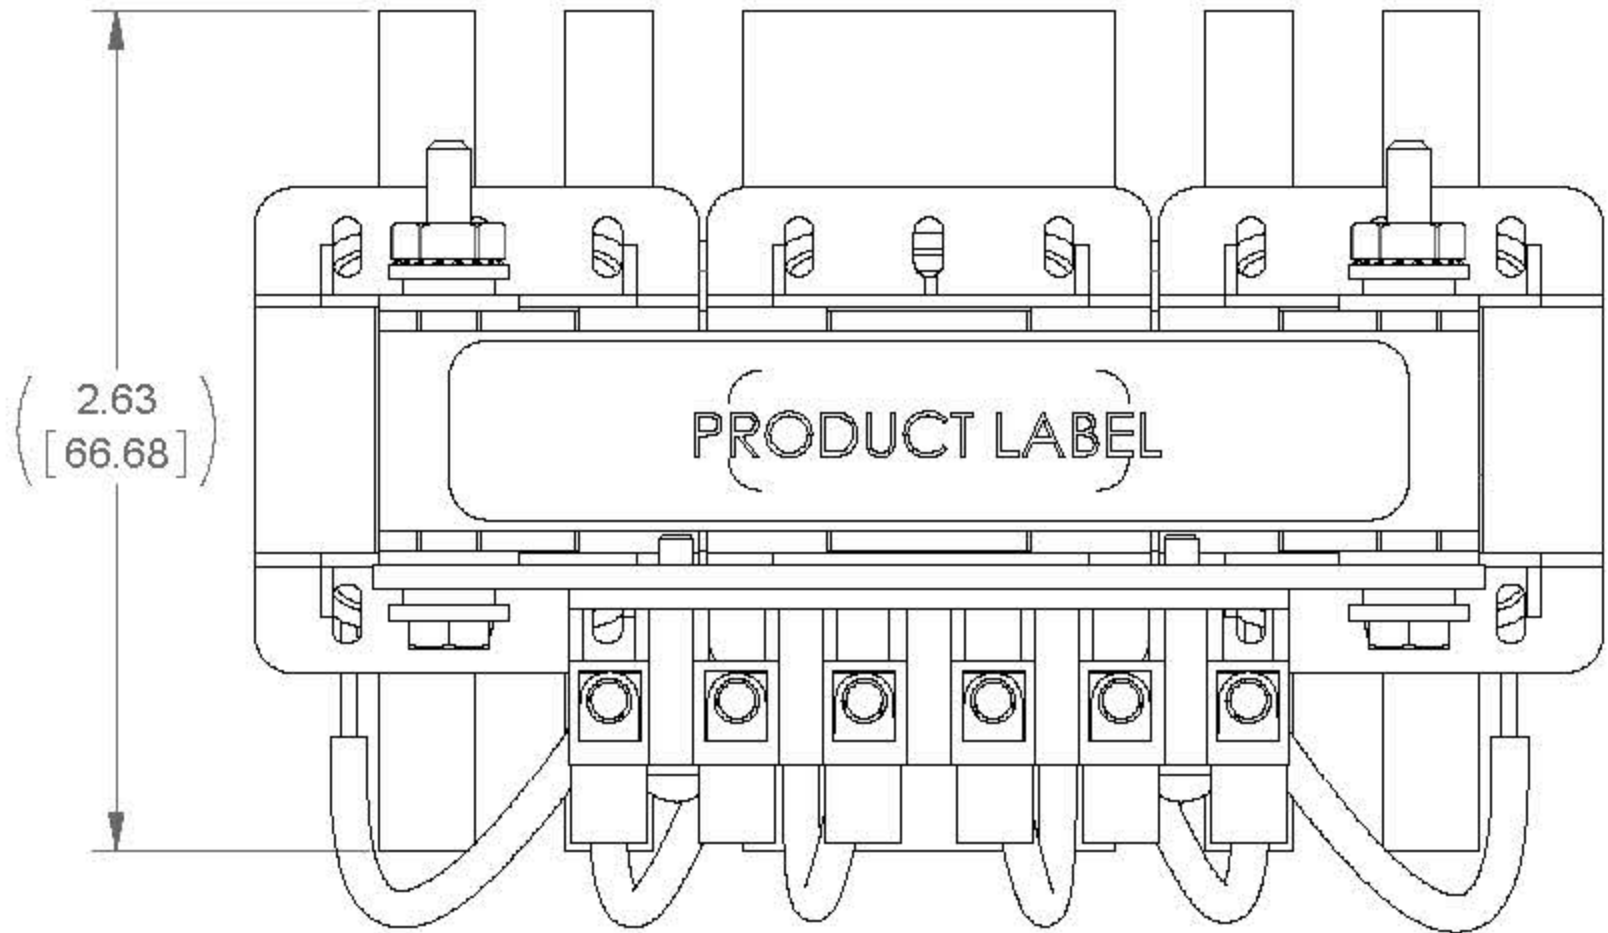

- NOTES:
1. TERMINAL SCREW TIGHTENING TORQUE: 4.5 in-lbs MAX
 2. WIRE RANGE: 22 - 10 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE:				LINE REACTOR	
ANGLES: ± 1 °		DRAWN	DATE		
1 PLACE .X: ± .1 [2.5]		JP	08/27/12		
2 PLACE .XX: ± .03 [0.76]		CHECKED	DATE		
3 PLACE .XXX: ± .010 [0.254]		TM	12/21/12		
		APPROVED	DATE		
		TM	12/21/12		
				SIZE	REV
				D	05
				SCALE	
				5:3	

MTE
AN BL POWER ELECTRONICS COMPANY

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455.4693
262.253.8200

CD RLW-07P603

SHEET 1 OF 1