
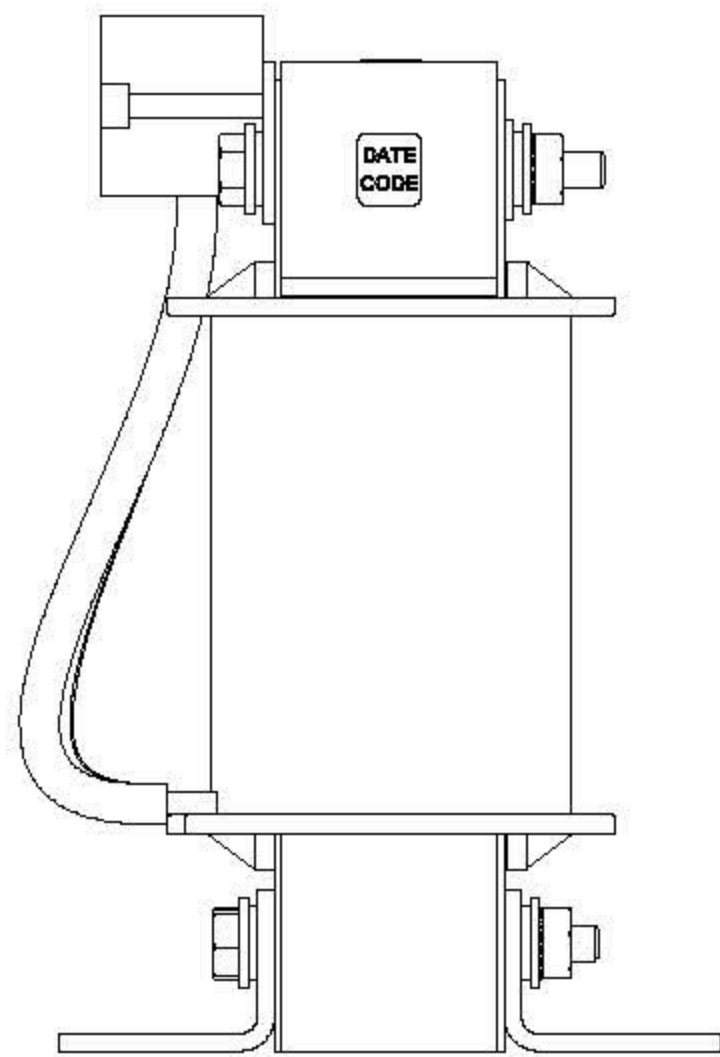
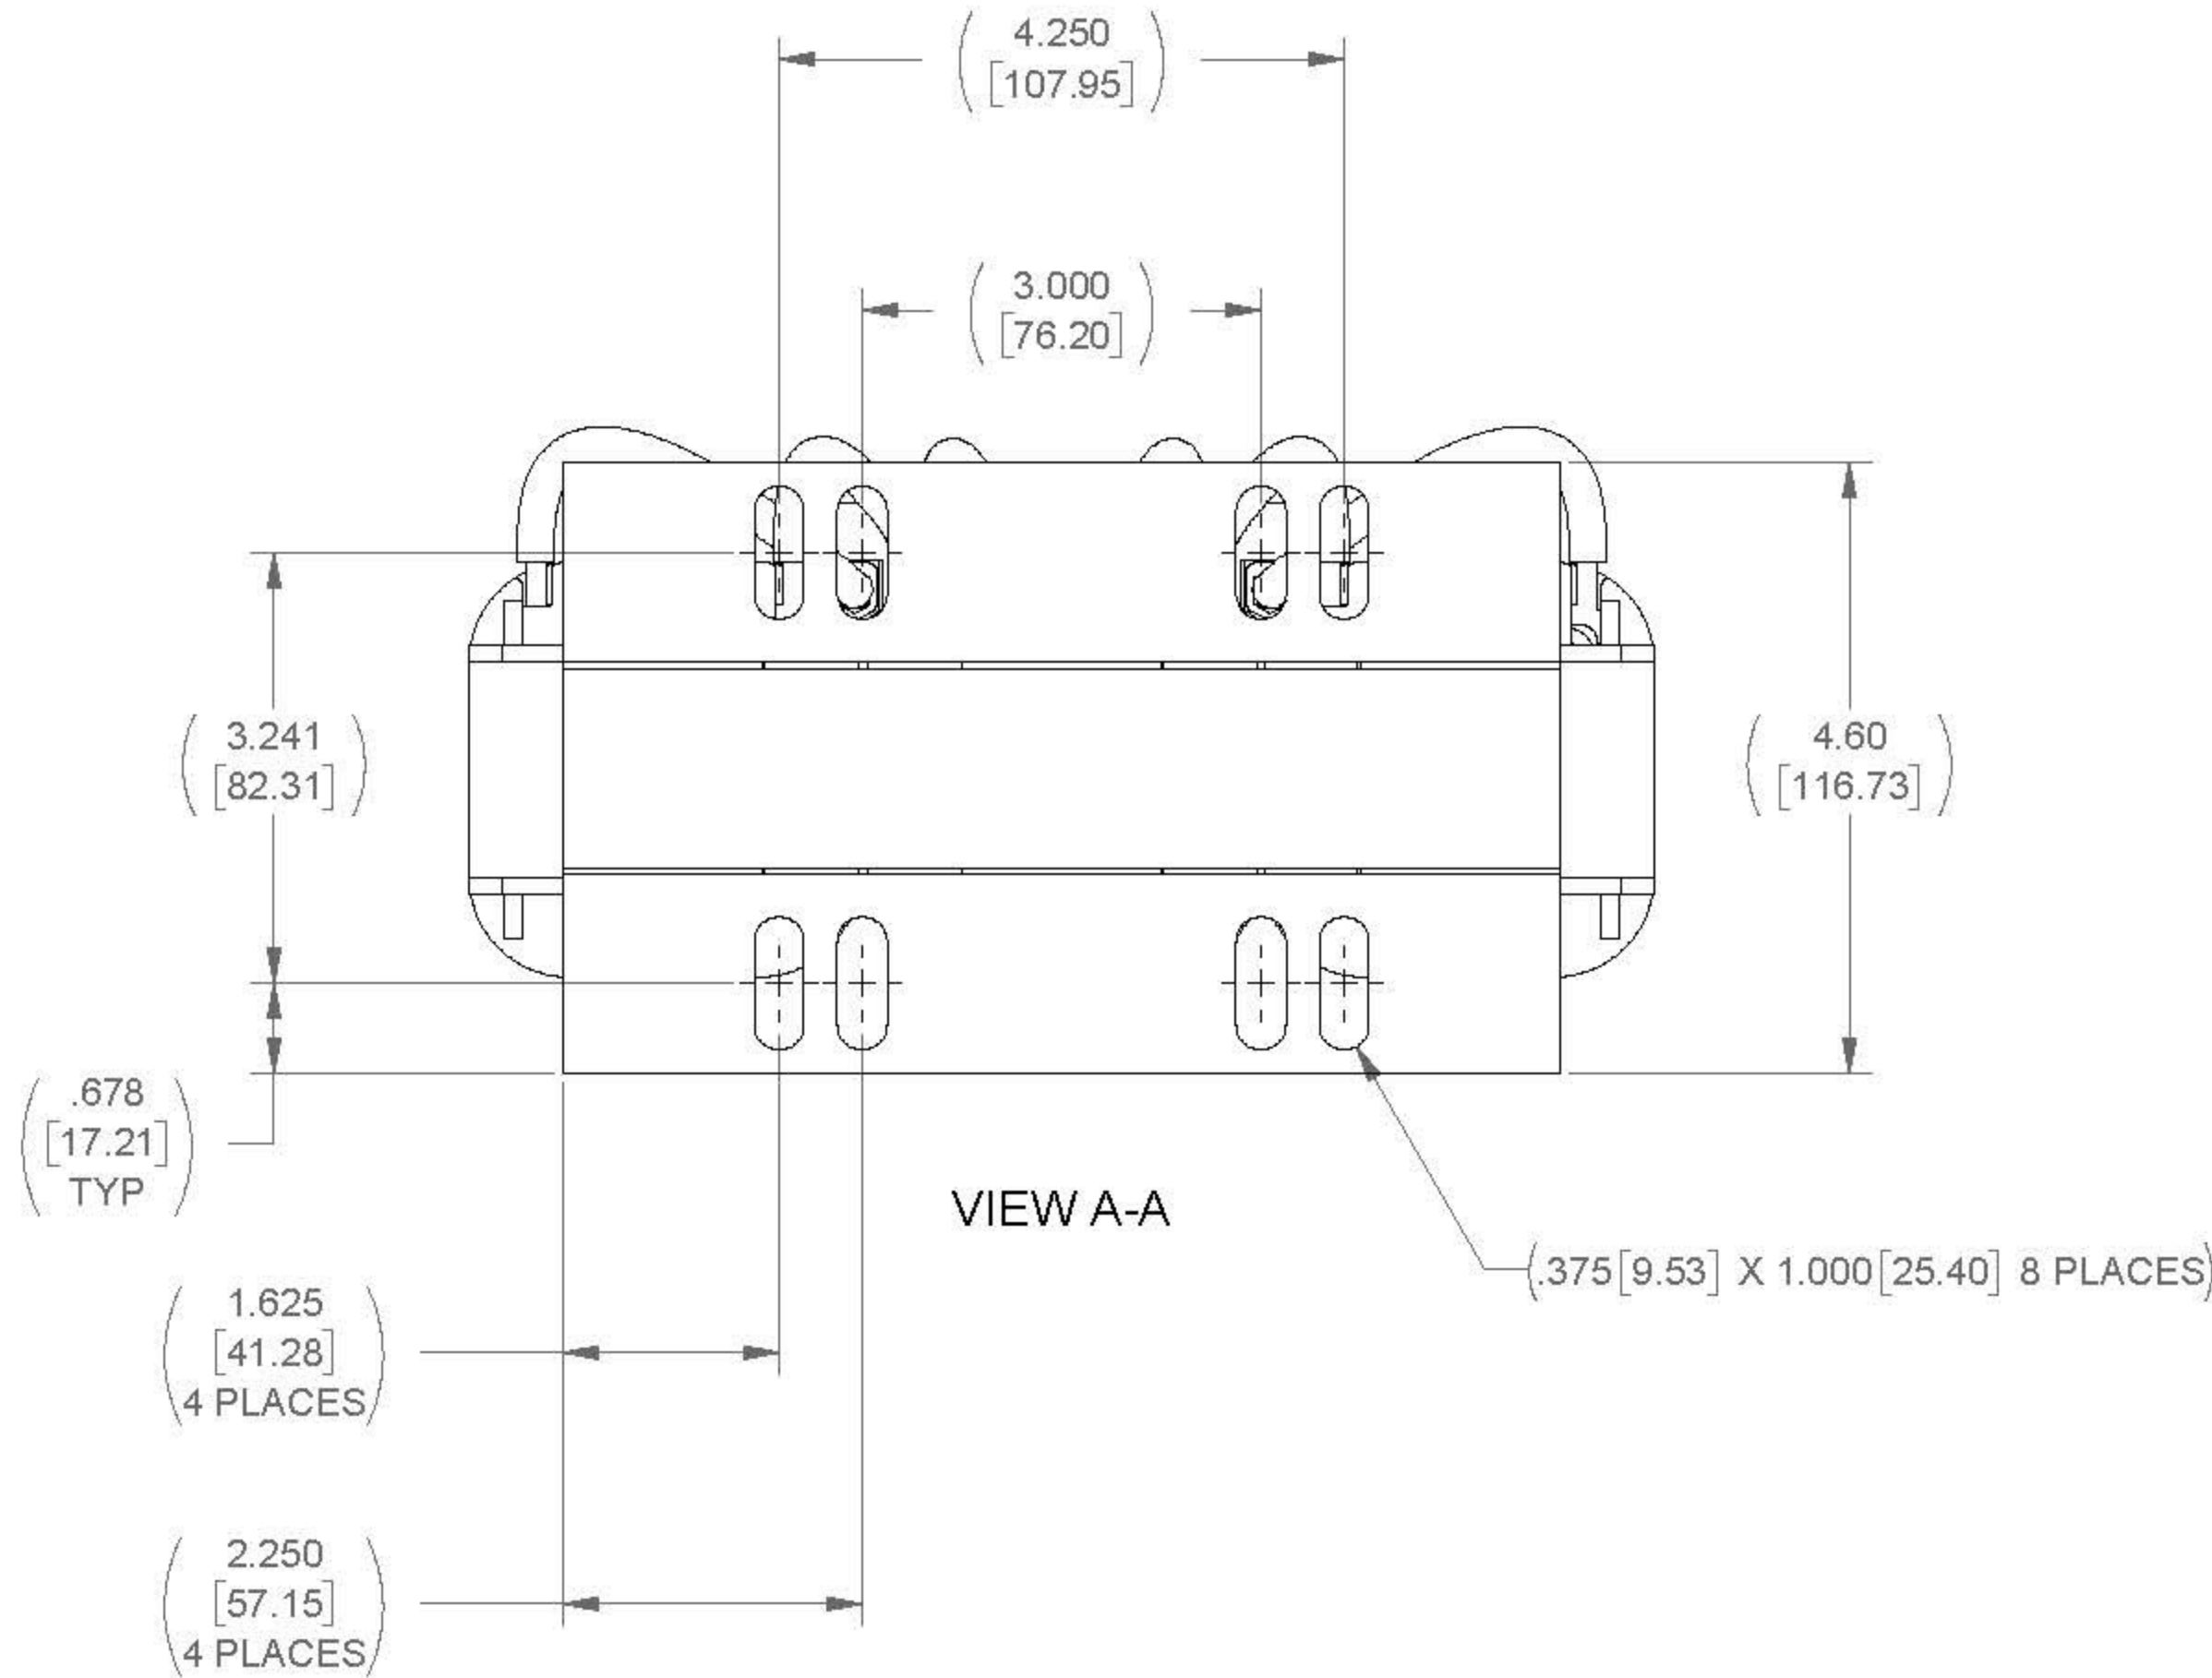
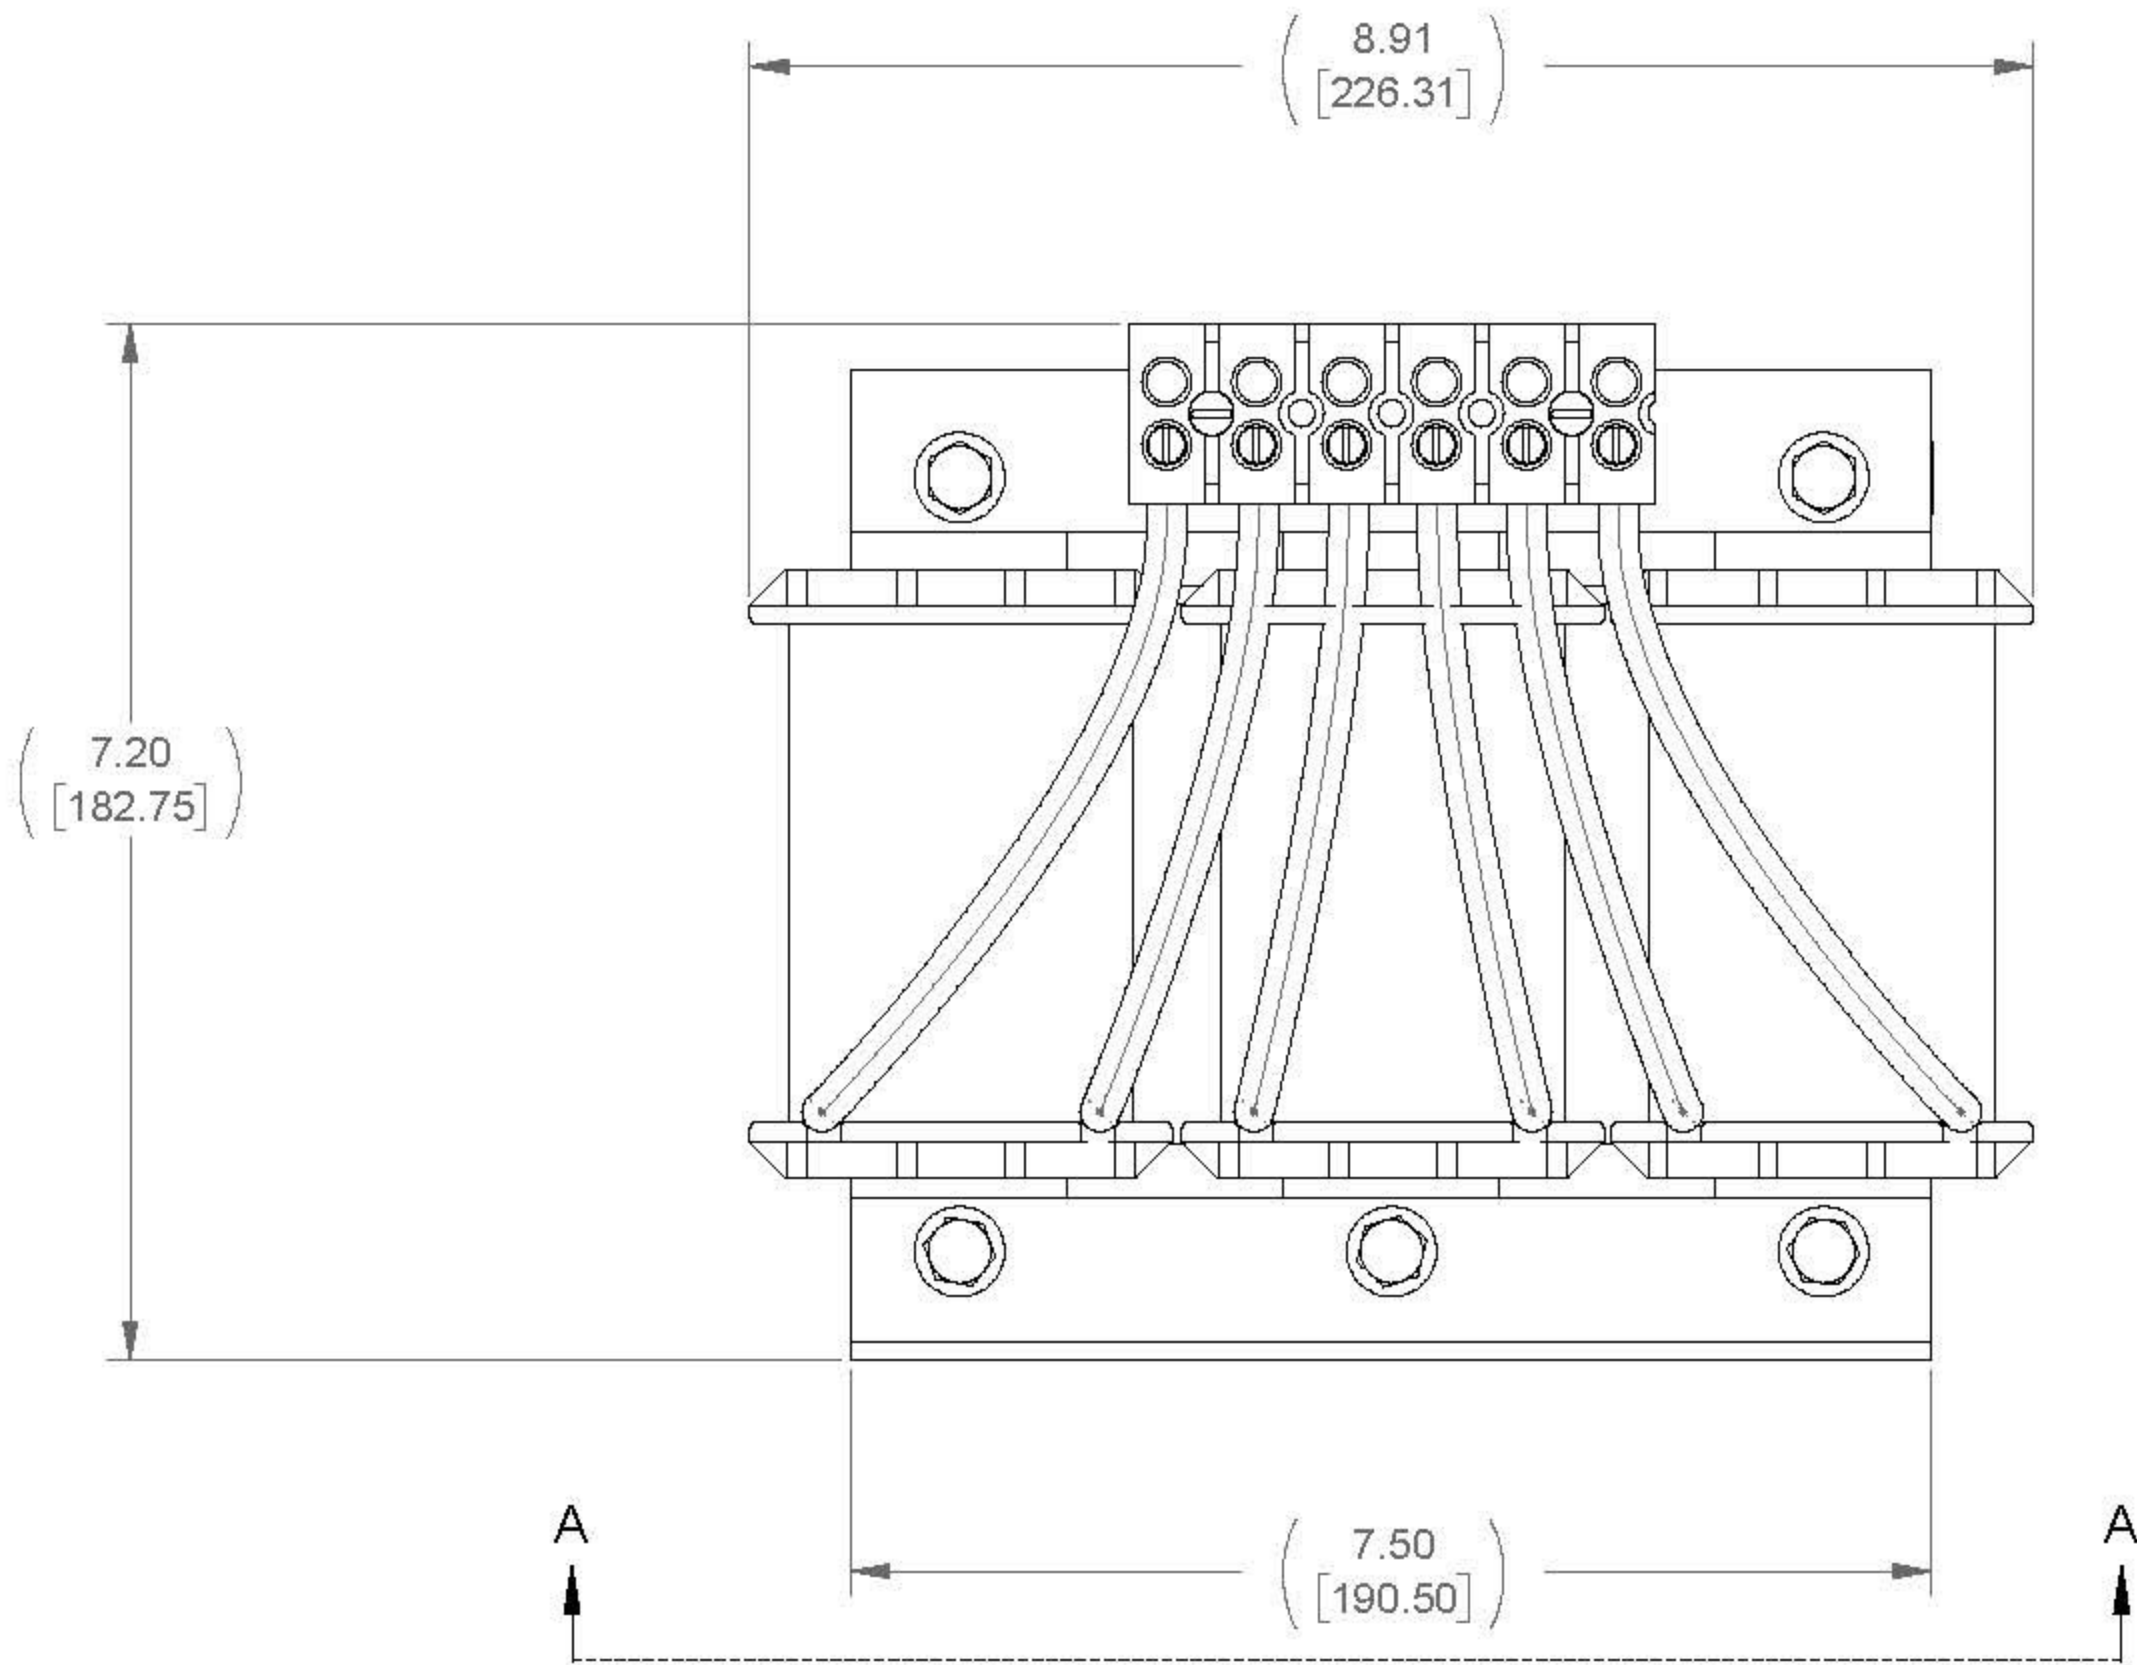


WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
26	1.2 mH	54

ECO No	DESCRIPTION	REV BY	DATE
M8415	MODIFY DIMENSION TO CURRENT STANDARD	SU	02/25/13

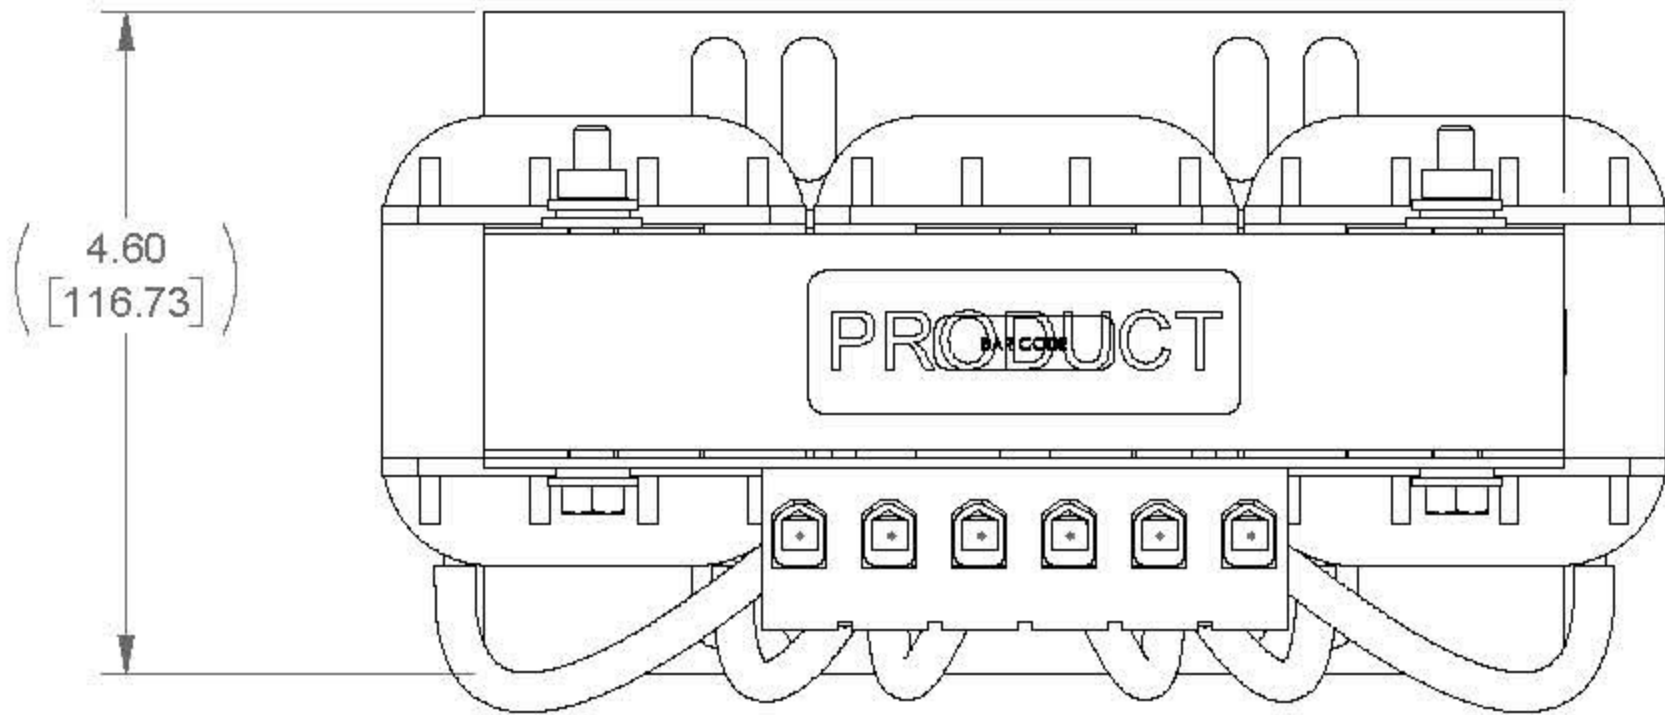

- NOTES:
1. TERMINAL SCREW TORQUE 16 IN-LBS
2. WIRE RANGE: 18-4 AWG

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (MM) TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		MTE AN BL POWER ELECTRONICS COMPANY N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		LINE/LOAD REACTOR	
		DRAWN BGS	DATE 4/7/04		
		CHECKED TM	DATE 03/19/13		
		APPROVED TM	DATE 03/19/13		
		SIZE D	DWG No. CD RL-03503	REV 21	
		SCALE 1:1		SHEET 1 OF 1	