






APPROX. WEIGHT
(LBS)
7

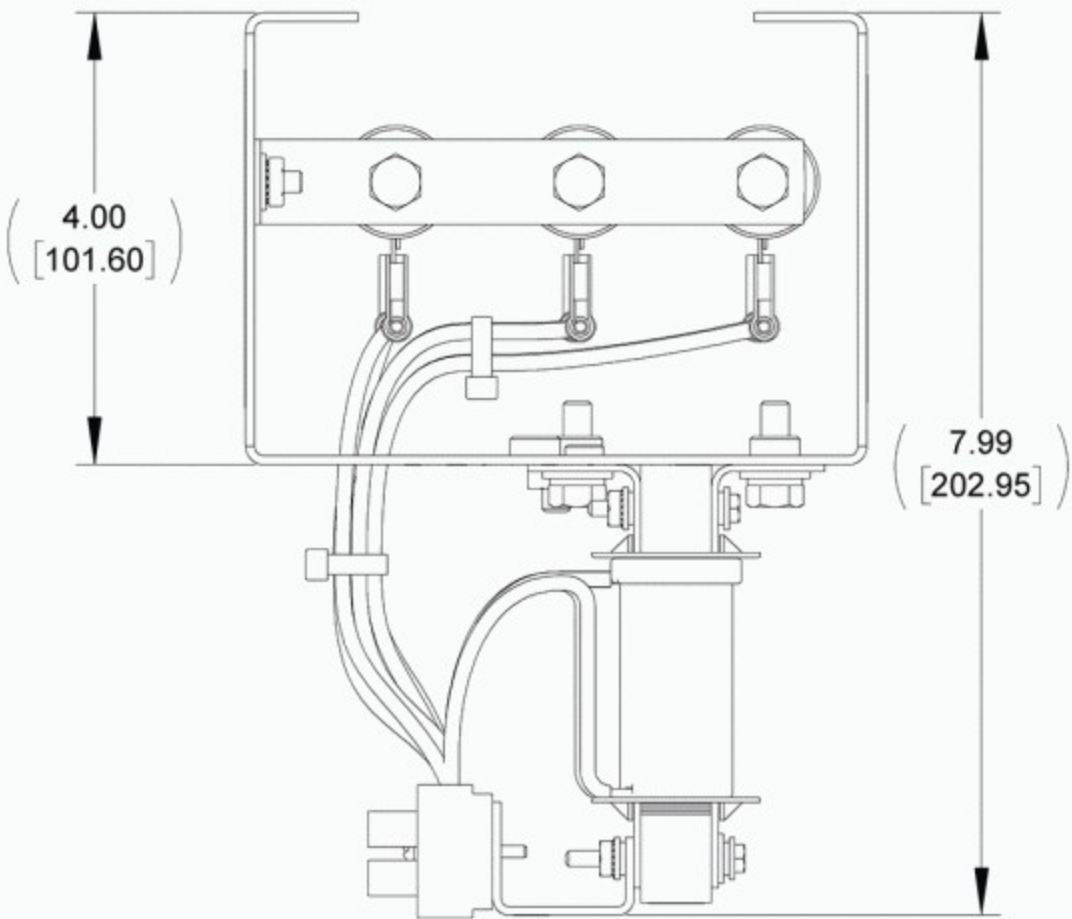


TOP VIEW

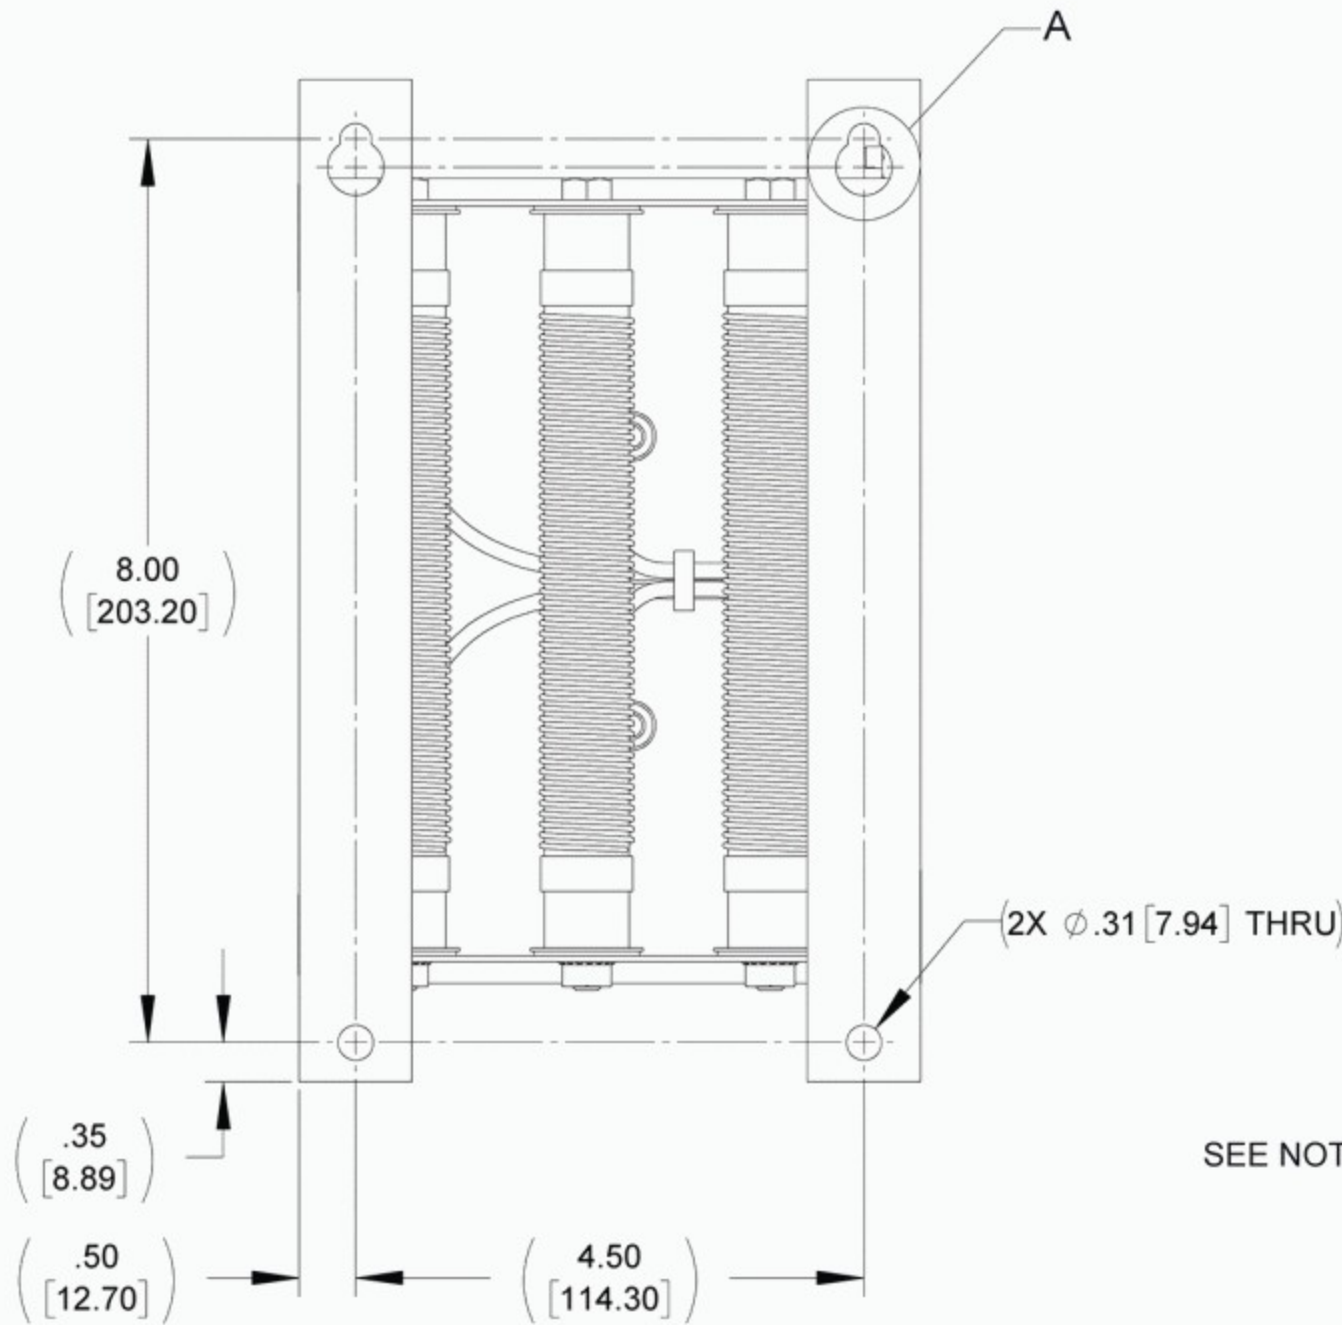


BACK VIEW

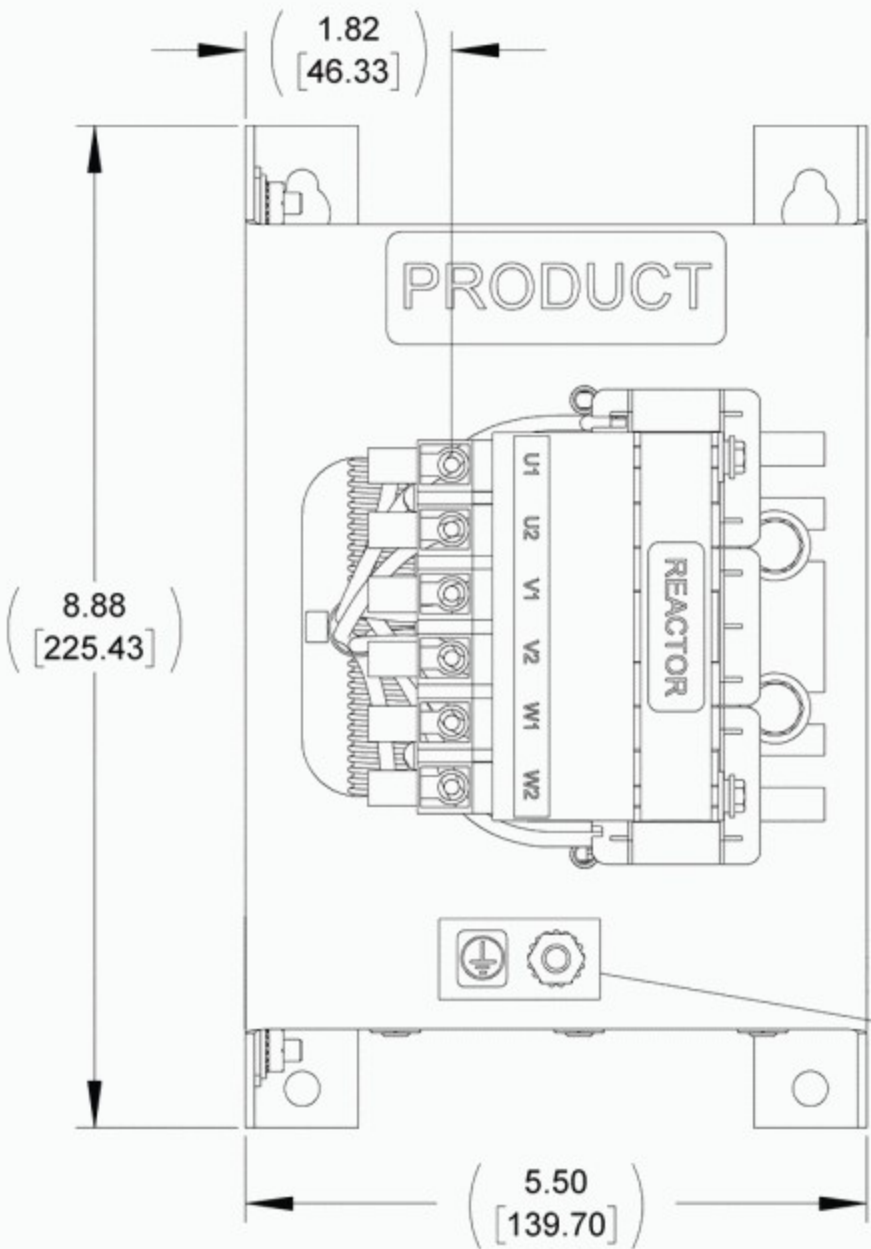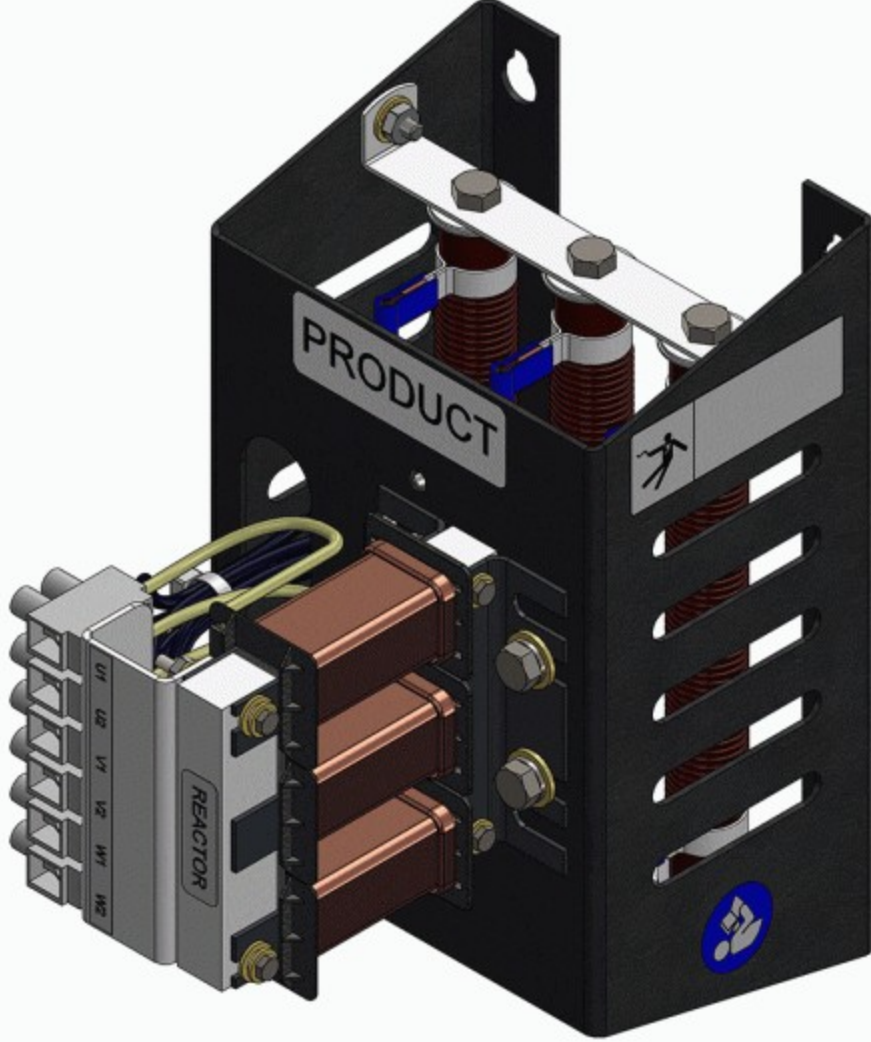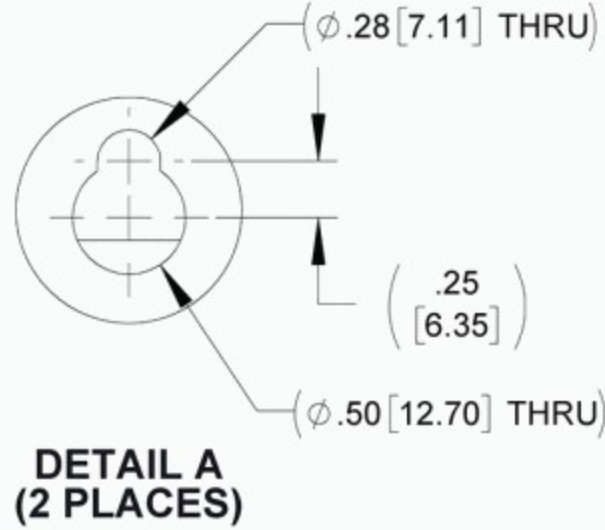

FRONT VIEW

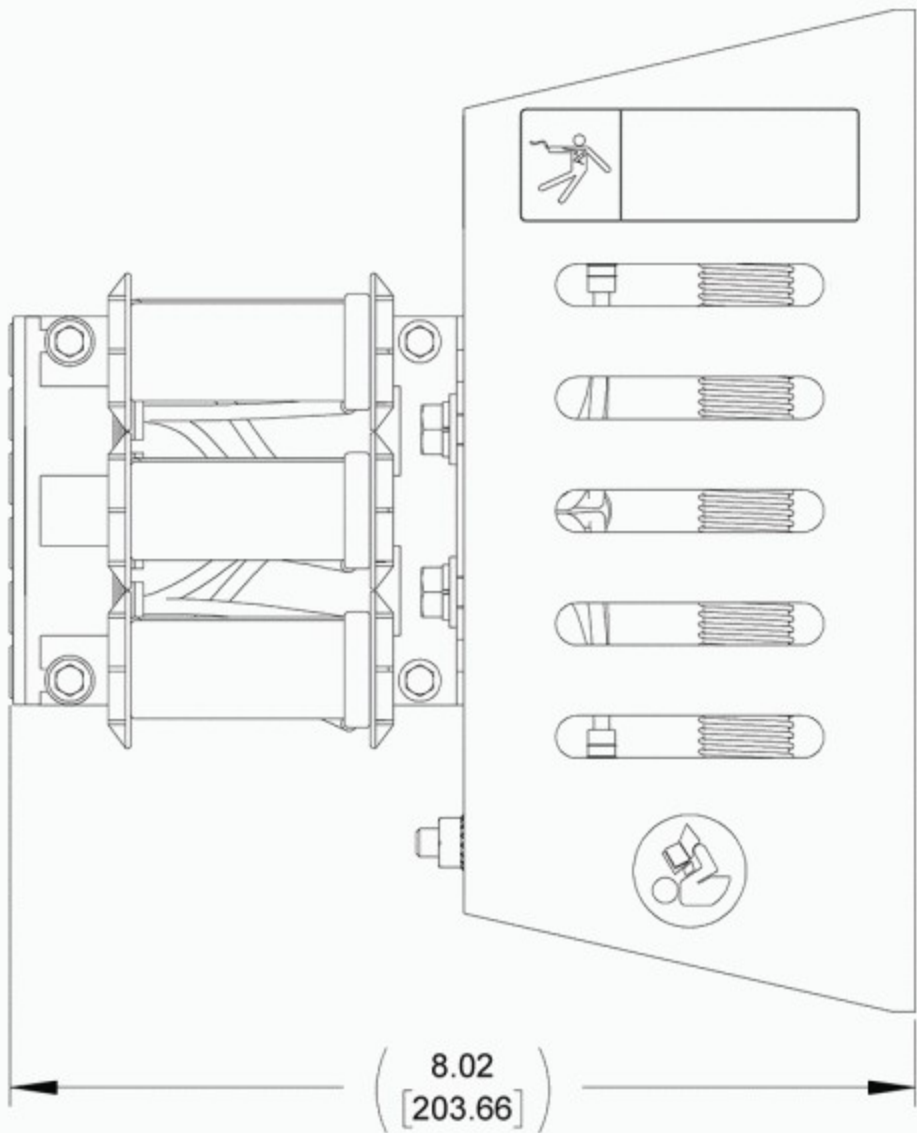

SIDE VIEW

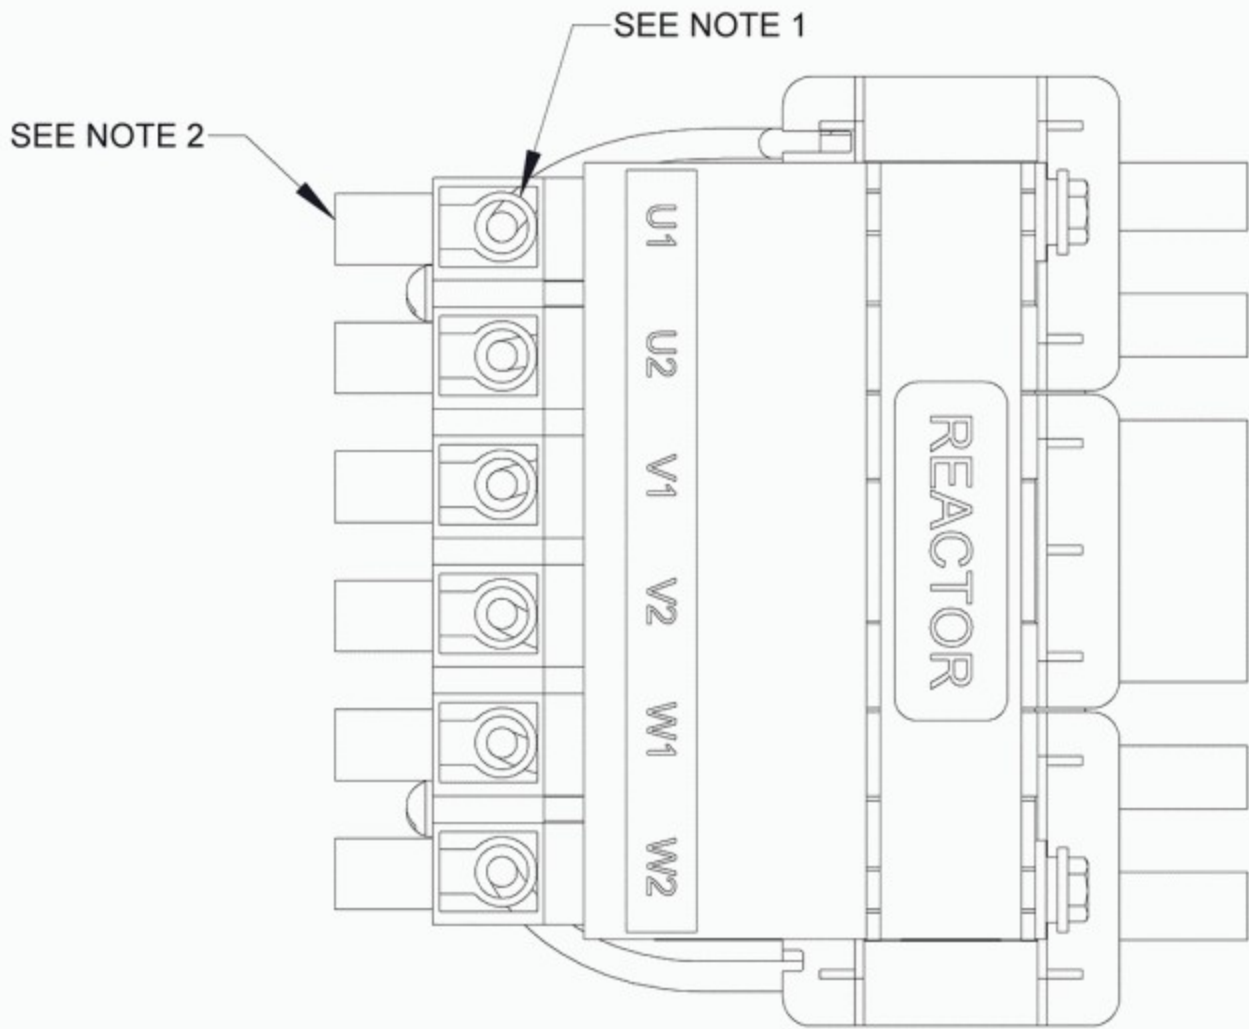

CUSTOMER CONNECTION
DETAIL VIEW

- NOTES:**
1. TERMINAL WIRE RANGE: 4-16 AWG.
 2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS.
 3. REFER TO USER MANUAL FOR COMPLETE INSTALLATION INSTRUCTIONS.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS2		DRAWN BY: KV	DATE 07/02/21	CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION		CHECKED BY: JD	DATE 11/12/21	DESCRIPTION DVDT E SERIES 22A 208-600V 2-4kHz FILTER, OPEN PANEL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		ME APPROVED BY: DP	DATE 11/12/21		
		RE APPROVED BY: PY	DATE 11/15/21	SIZE D SCALE 3/4	DWG No. CD DVTP0022E REV 01 SHEET 1 OF 1

MTE
POWER QUALITY. SOLVED.
A STEEL PARTNERS COMPANY

N83 W13330 Leon Road
Menomonee Falls, WI 53051 USA
800.455-4683
262.253.8200