



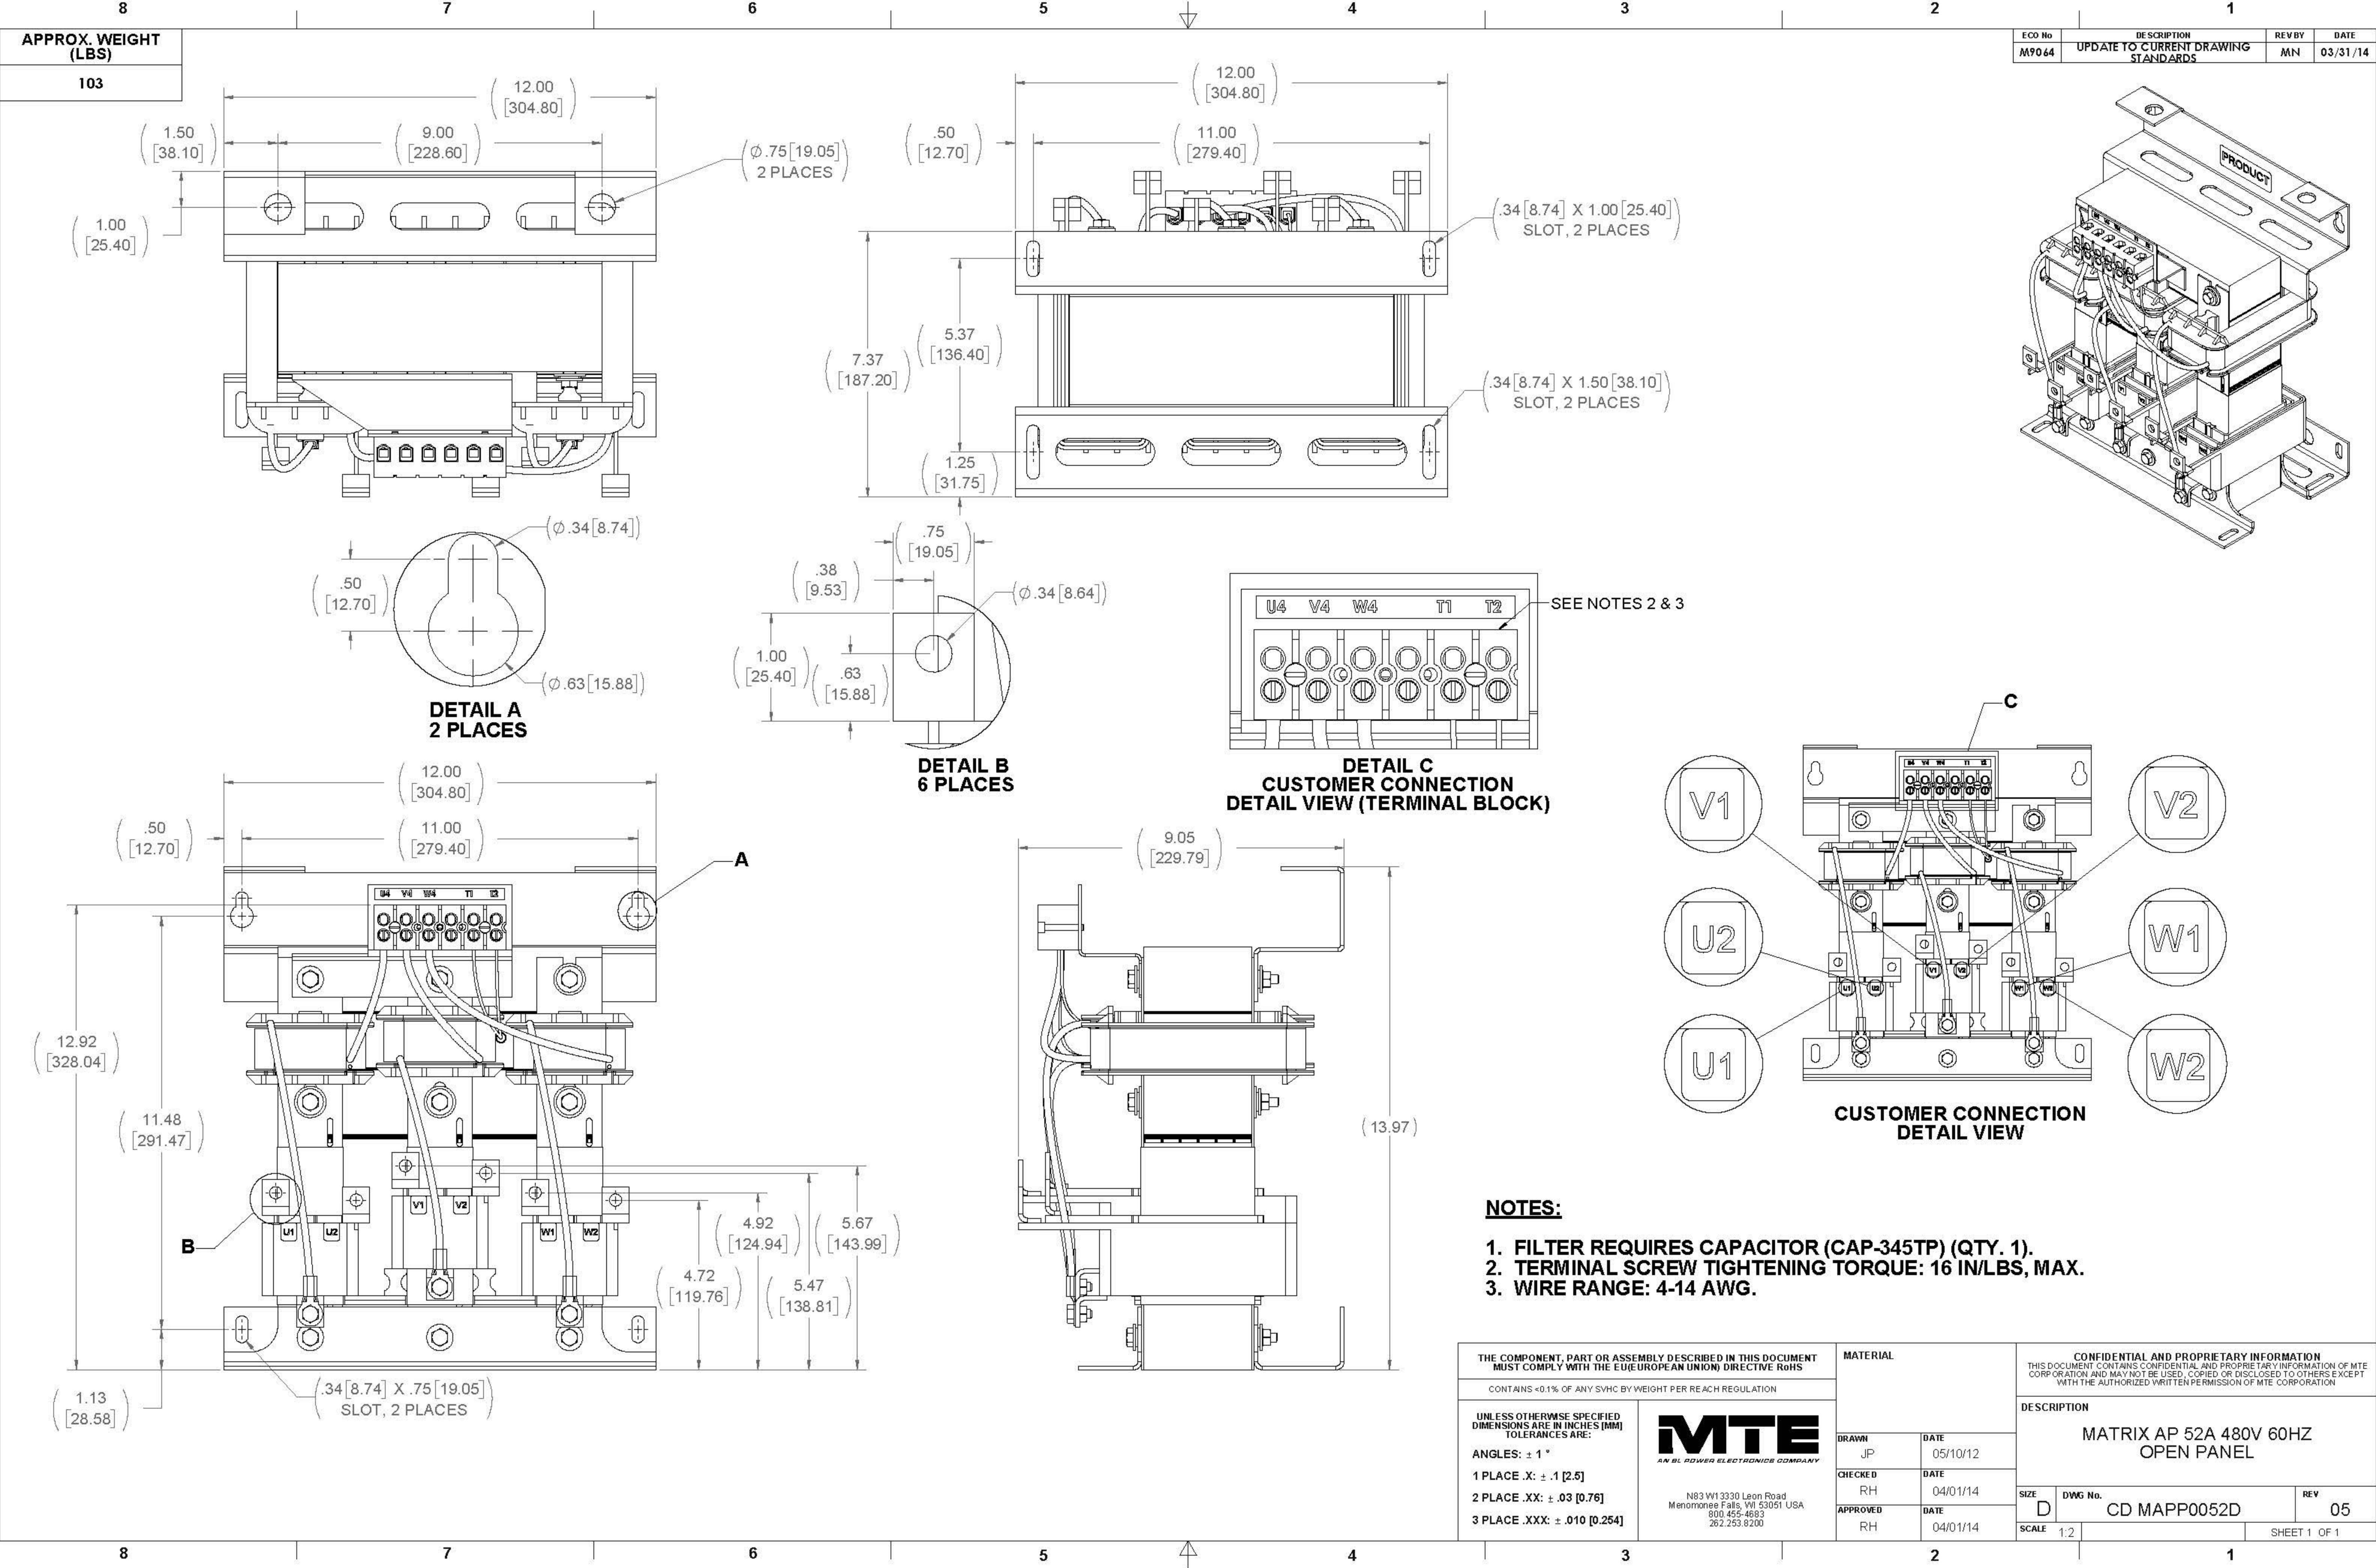

APPROX. WEIGHT (LBS)
103

ECO No	DESCRIPTION	REV BY	DATE
M9064	UPDATE TO CURRENT DRAWING STANDARDS	MN	03/31/14

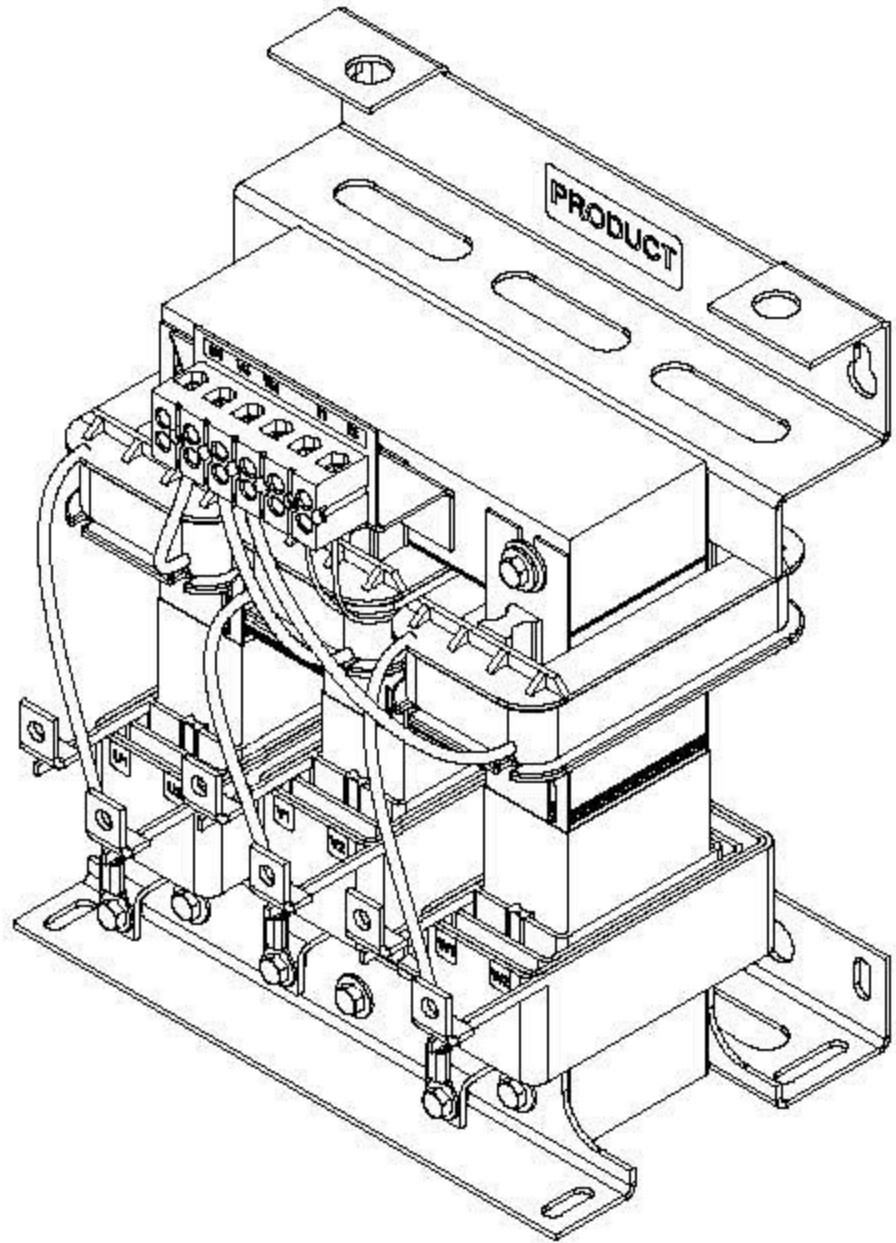

DETAIL A
2 PLACES

DETAIL B
6 PLACES

DETAIL C
CUSTOMER CONNECTION
DETAIL VIEW (TERMINAL BLOCK)

CUSTOMER CONNECTION
DETAIL VIEW

NOTES:

1. FILTER REQUIRES CAPACITOR (CAP-345TP) (QTY. 1).
2. TERMINAL SCREW TIGHTENING TORQUE: 16 IN/LBS, MAX.
3. WIRE RANGE: 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (MM) TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		MTE AN BL POWER ELECTRONICS COMPANY N83 W1 3330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		MATRIX AP 52A 480V 60HZ OPEN PANEL	
		DRAWN JP	DATE 05/10/12	SIZE D	DWG No. CD MAPP0052D
		CHECKED RH	DATE 04/01/14	SCALE 1:2	REV 05
		APPROVED RH	DATE 04/01/14	SHEET 1 OF 1	