



APPROX. WEIGHT (LBS)	INDUCTANCE	LOSS (WATTS)
2.43	12 mH	7.5



ECO No	DESCRIPTION	REV BY	DATE
M11732	UPDATE TO NEW TEMPLATE	MN	04/16/19

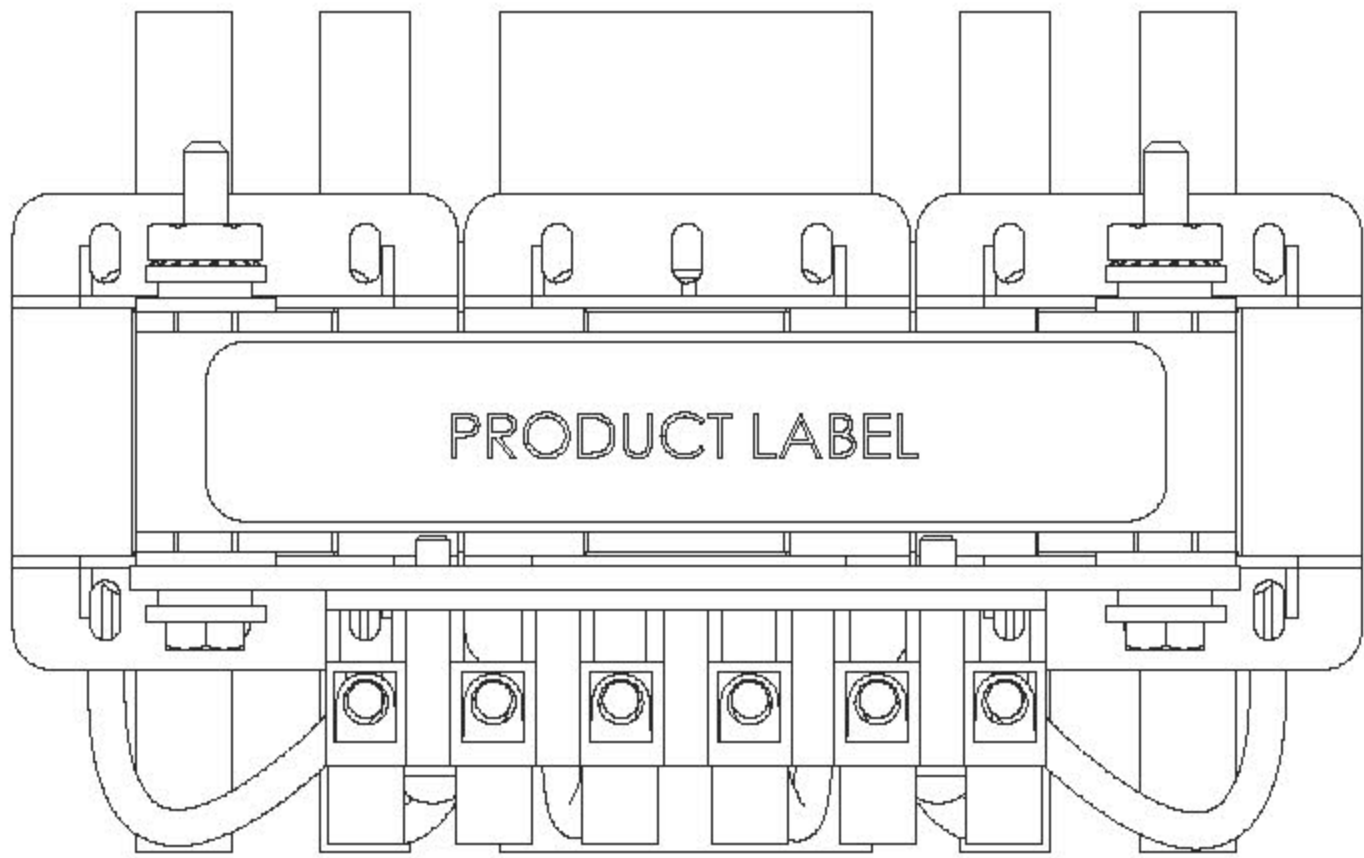


TOP VIEW

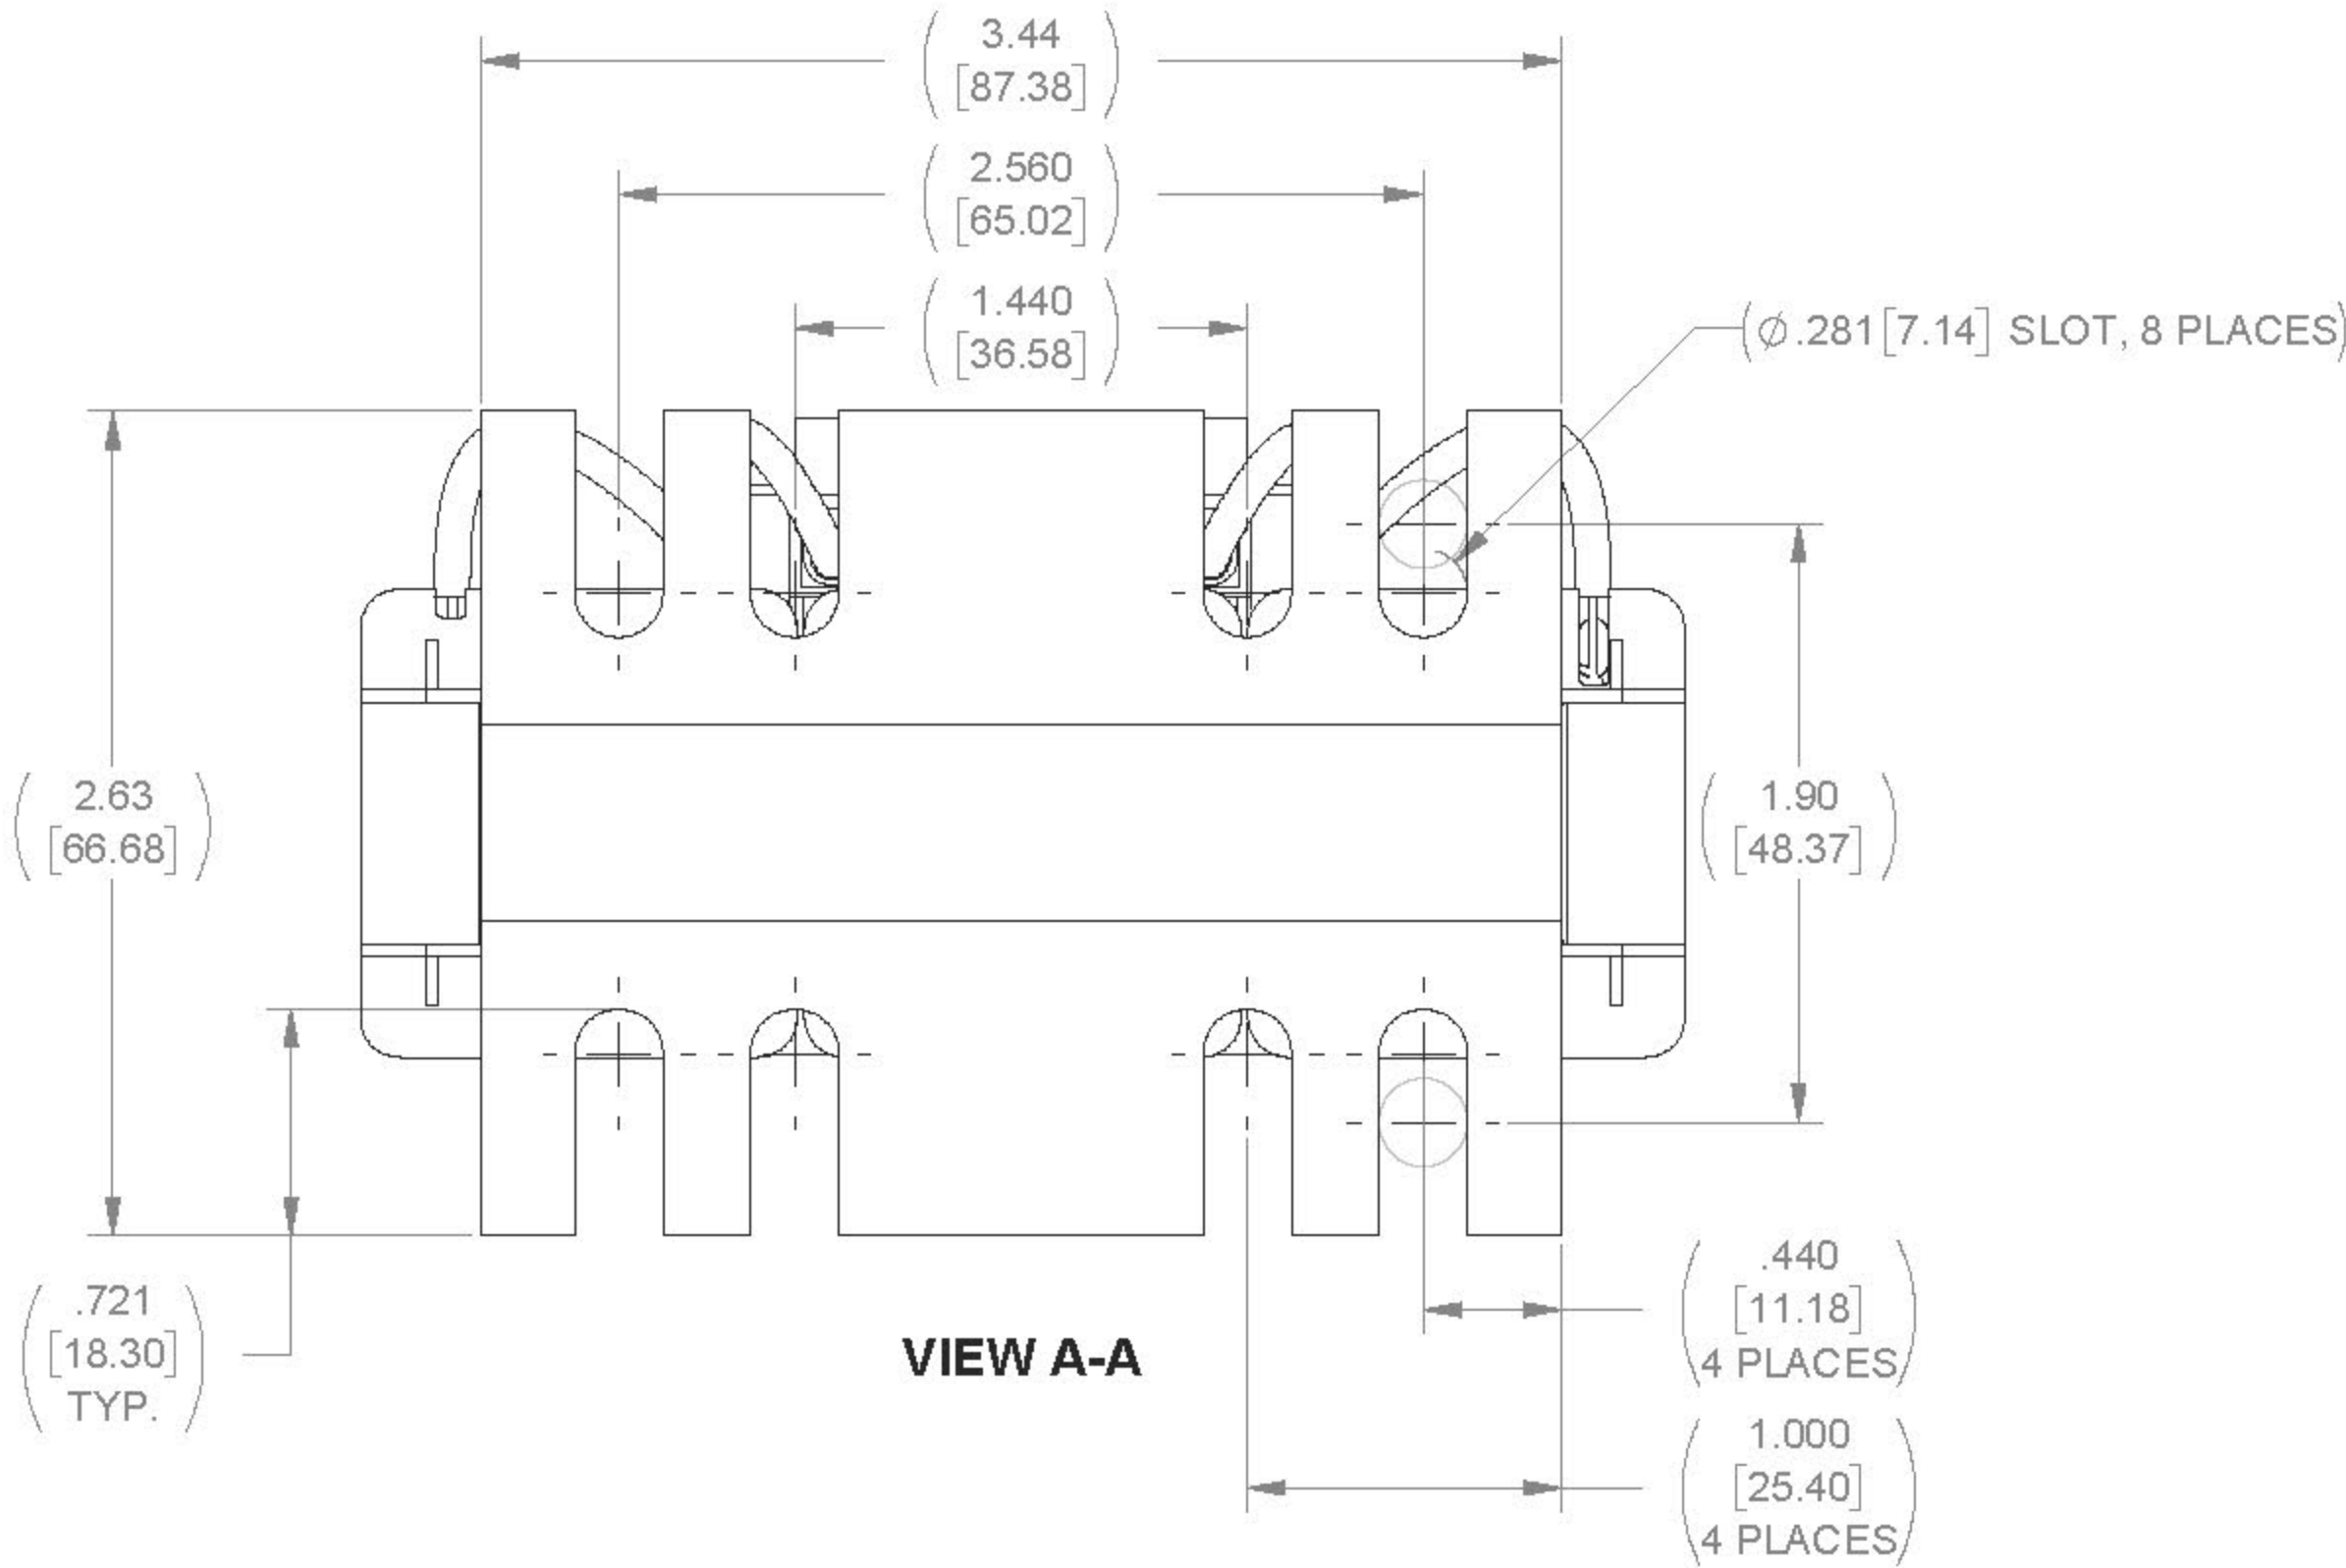


VIEW A-A

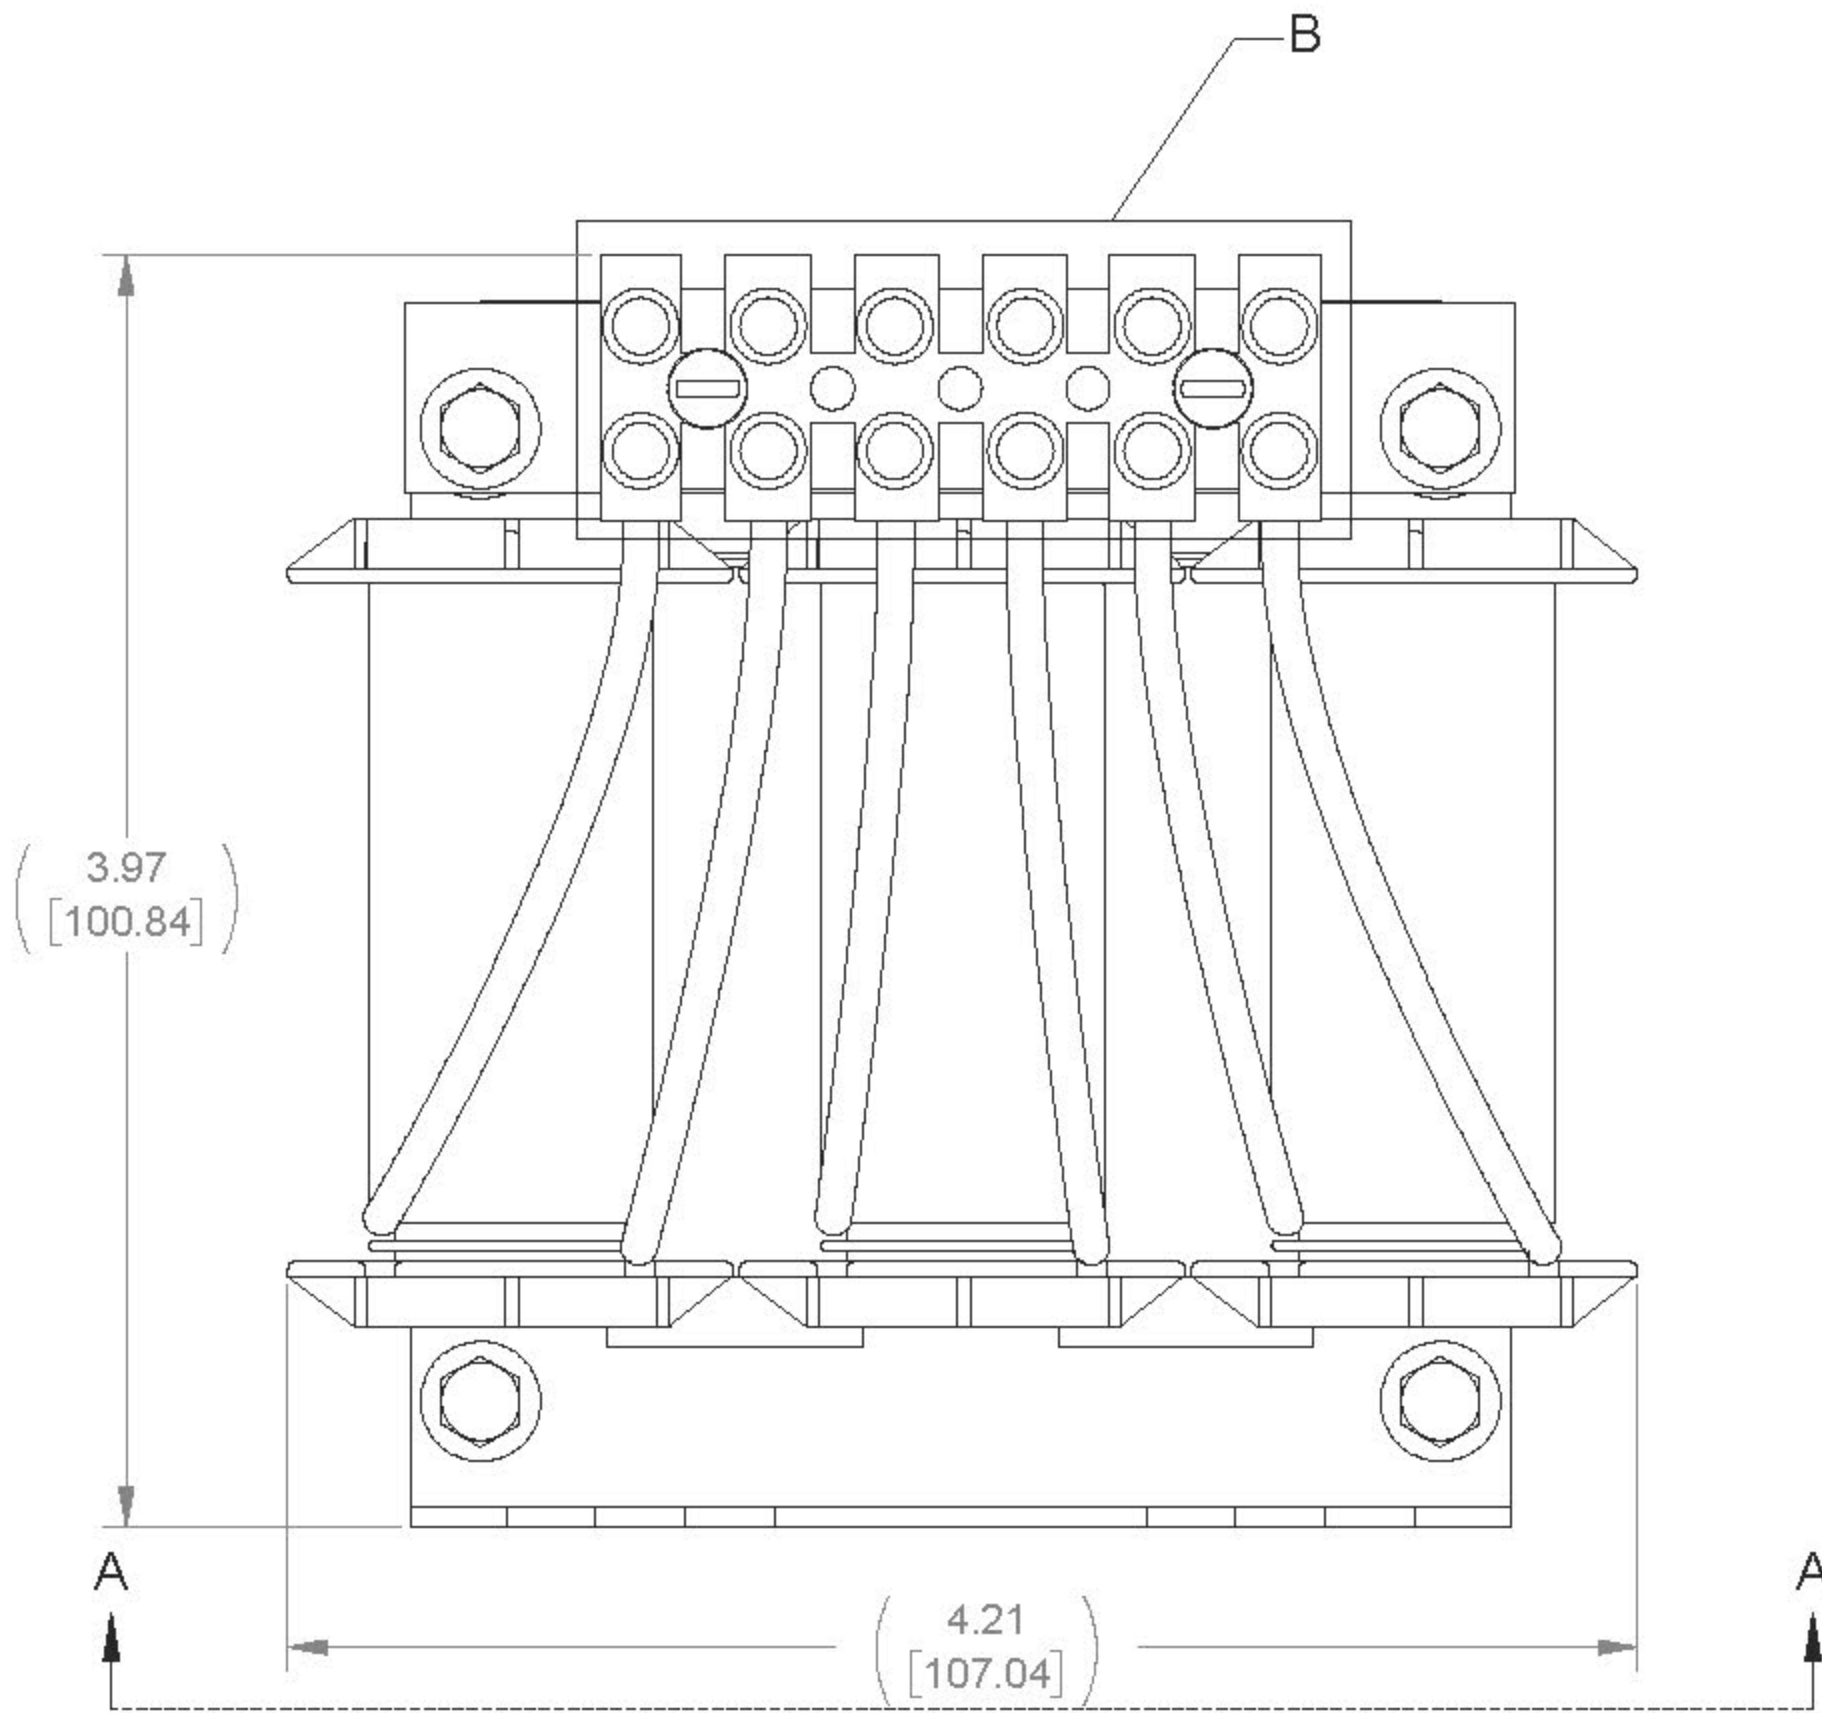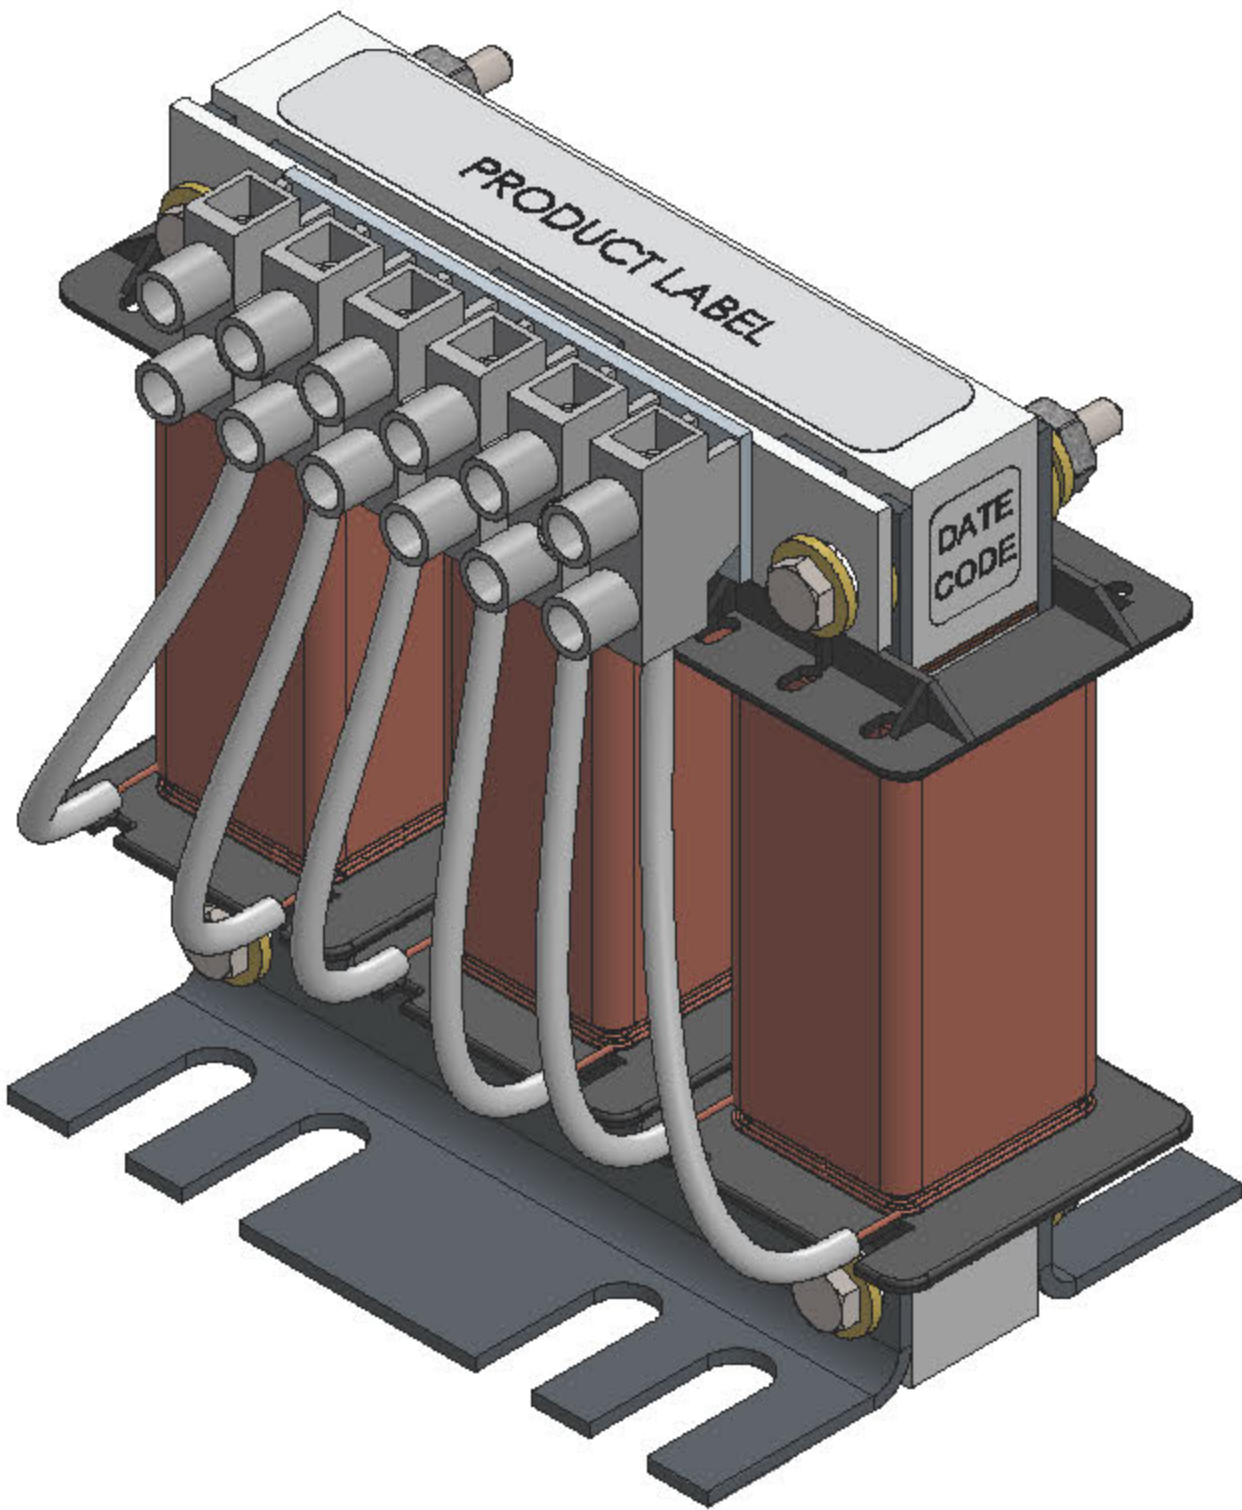

FRONT VIEW

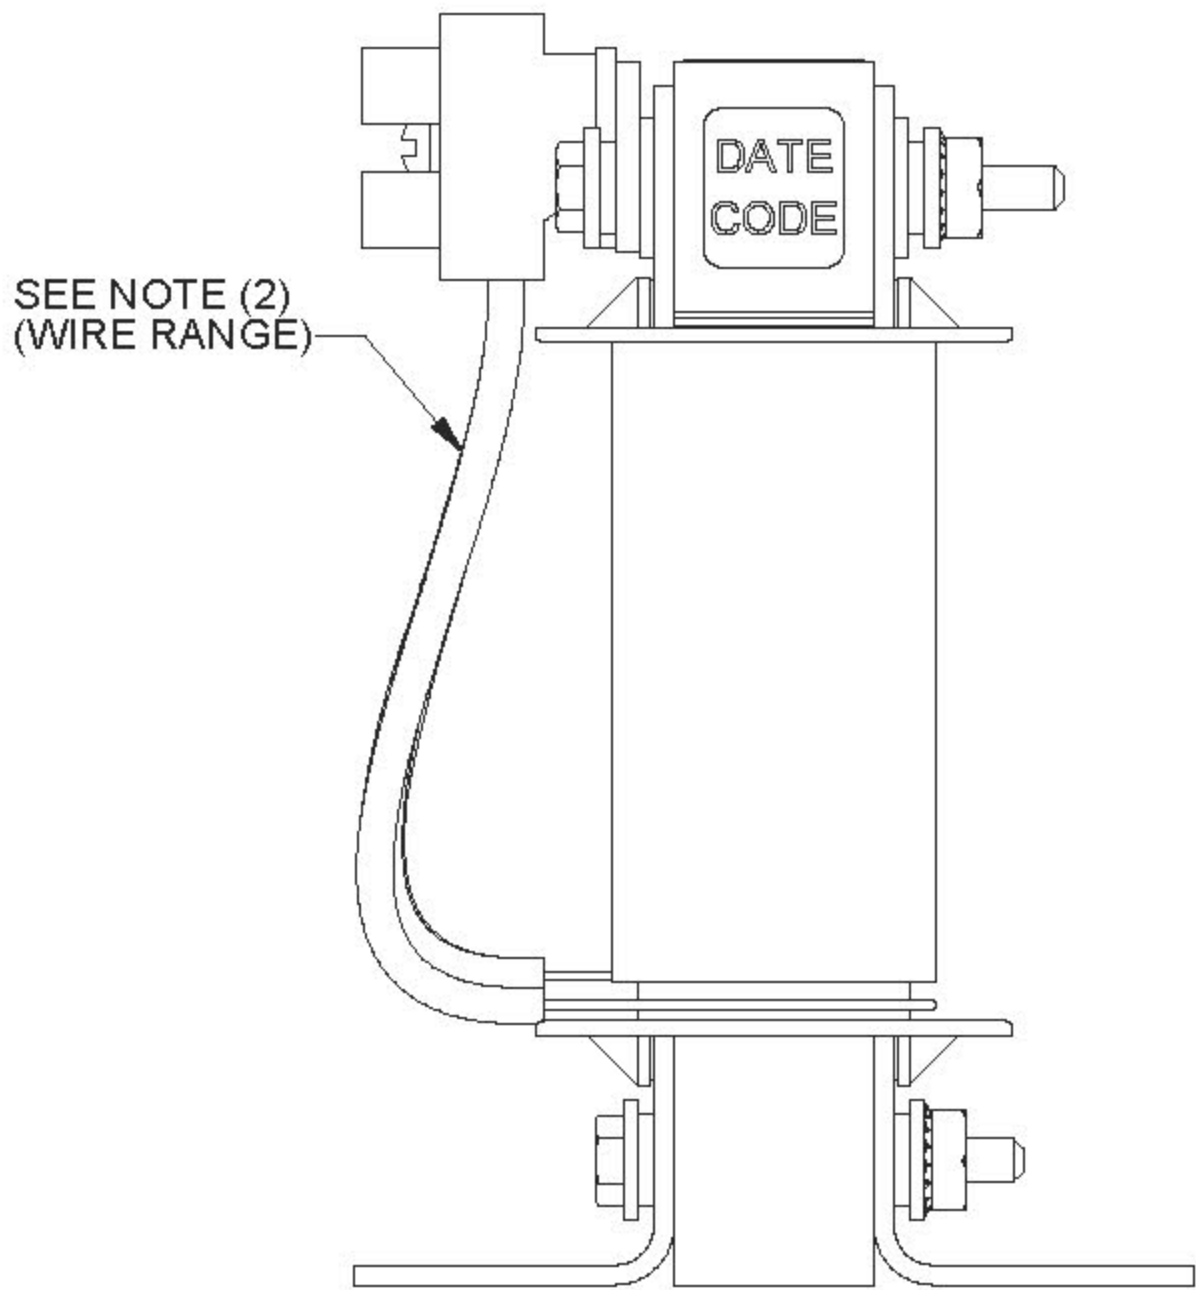

SIDE VIEW

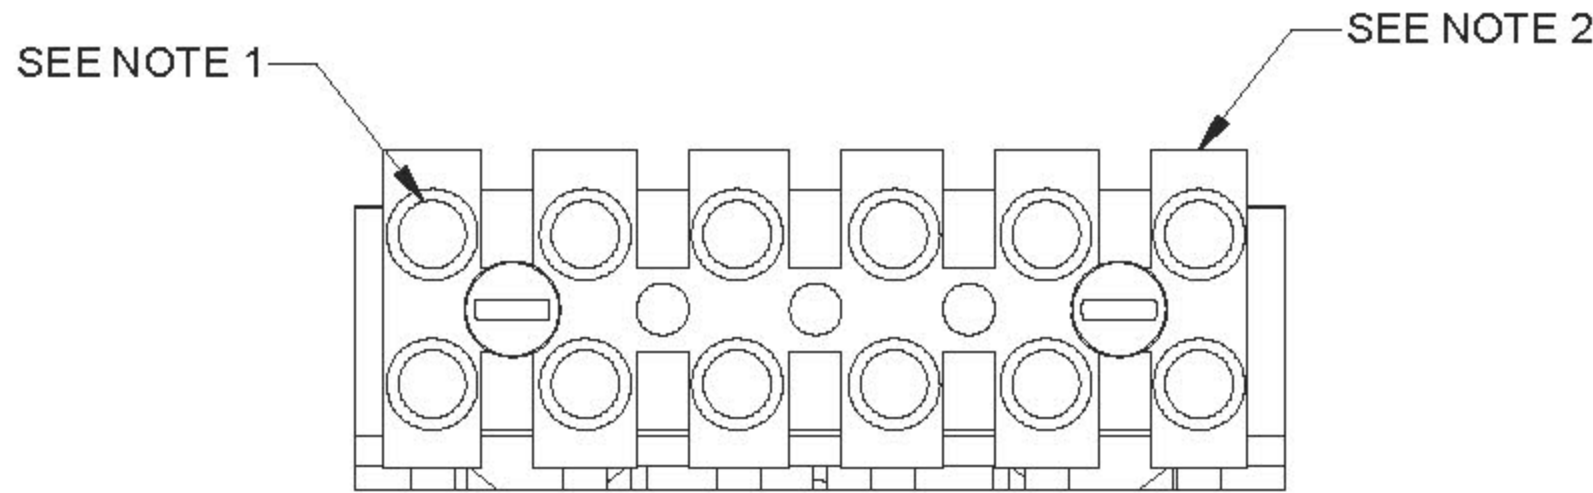

DETAIL B
CUSTOMER CONNECTION
DETAIL VIEW

NOTES:

1. TERMINAL SCREW TIGHTENING TORQUE: 4.5 IN/LBS.
2. WIRE RANGE: 22-10AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU(EUROPEAN UNION) DIRECTIVE RoHS2		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION			
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		 POWER QUALITY. SOLVED. N83 W13330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		DRAWN		DATE	
		SJW		03/06/90		LINE/LOAD REACTOR (2AMPS 12mH)	
		CHECKED		DATE			
		MN		04/16/19			
		APPROVED		DATE		SIZE	
		AK		04/16/19		D	
						DWG No.	
						CD RL-00201	
						REV	
						14	
						SCALE	
						5:3	
						SHEET 1 OF 1	