



APPROX. WEIGHT (LBS)
51



ECO No	DESCRIPTION	REV BY	DATE
M9052	UPDATE TO CURRENT DRAWING STANDARDS	MN	03/19/14

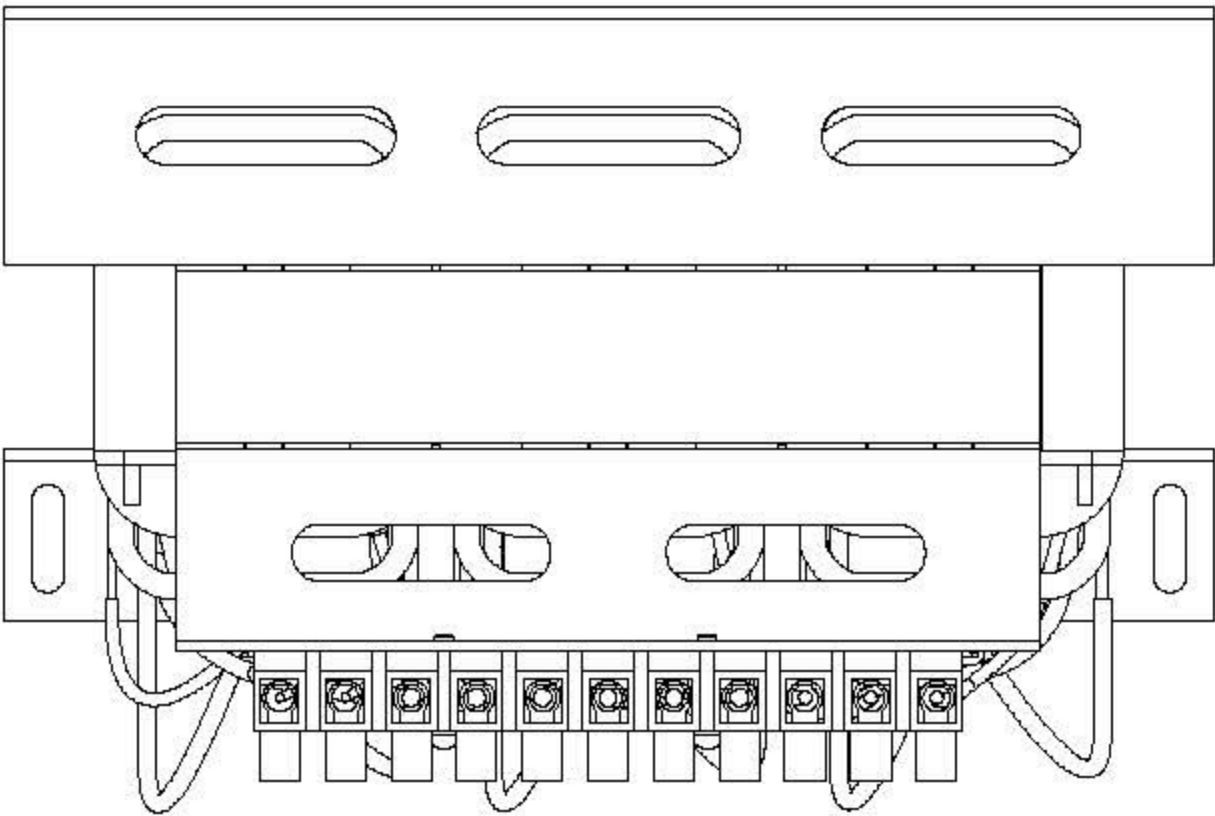


TOP VIEW

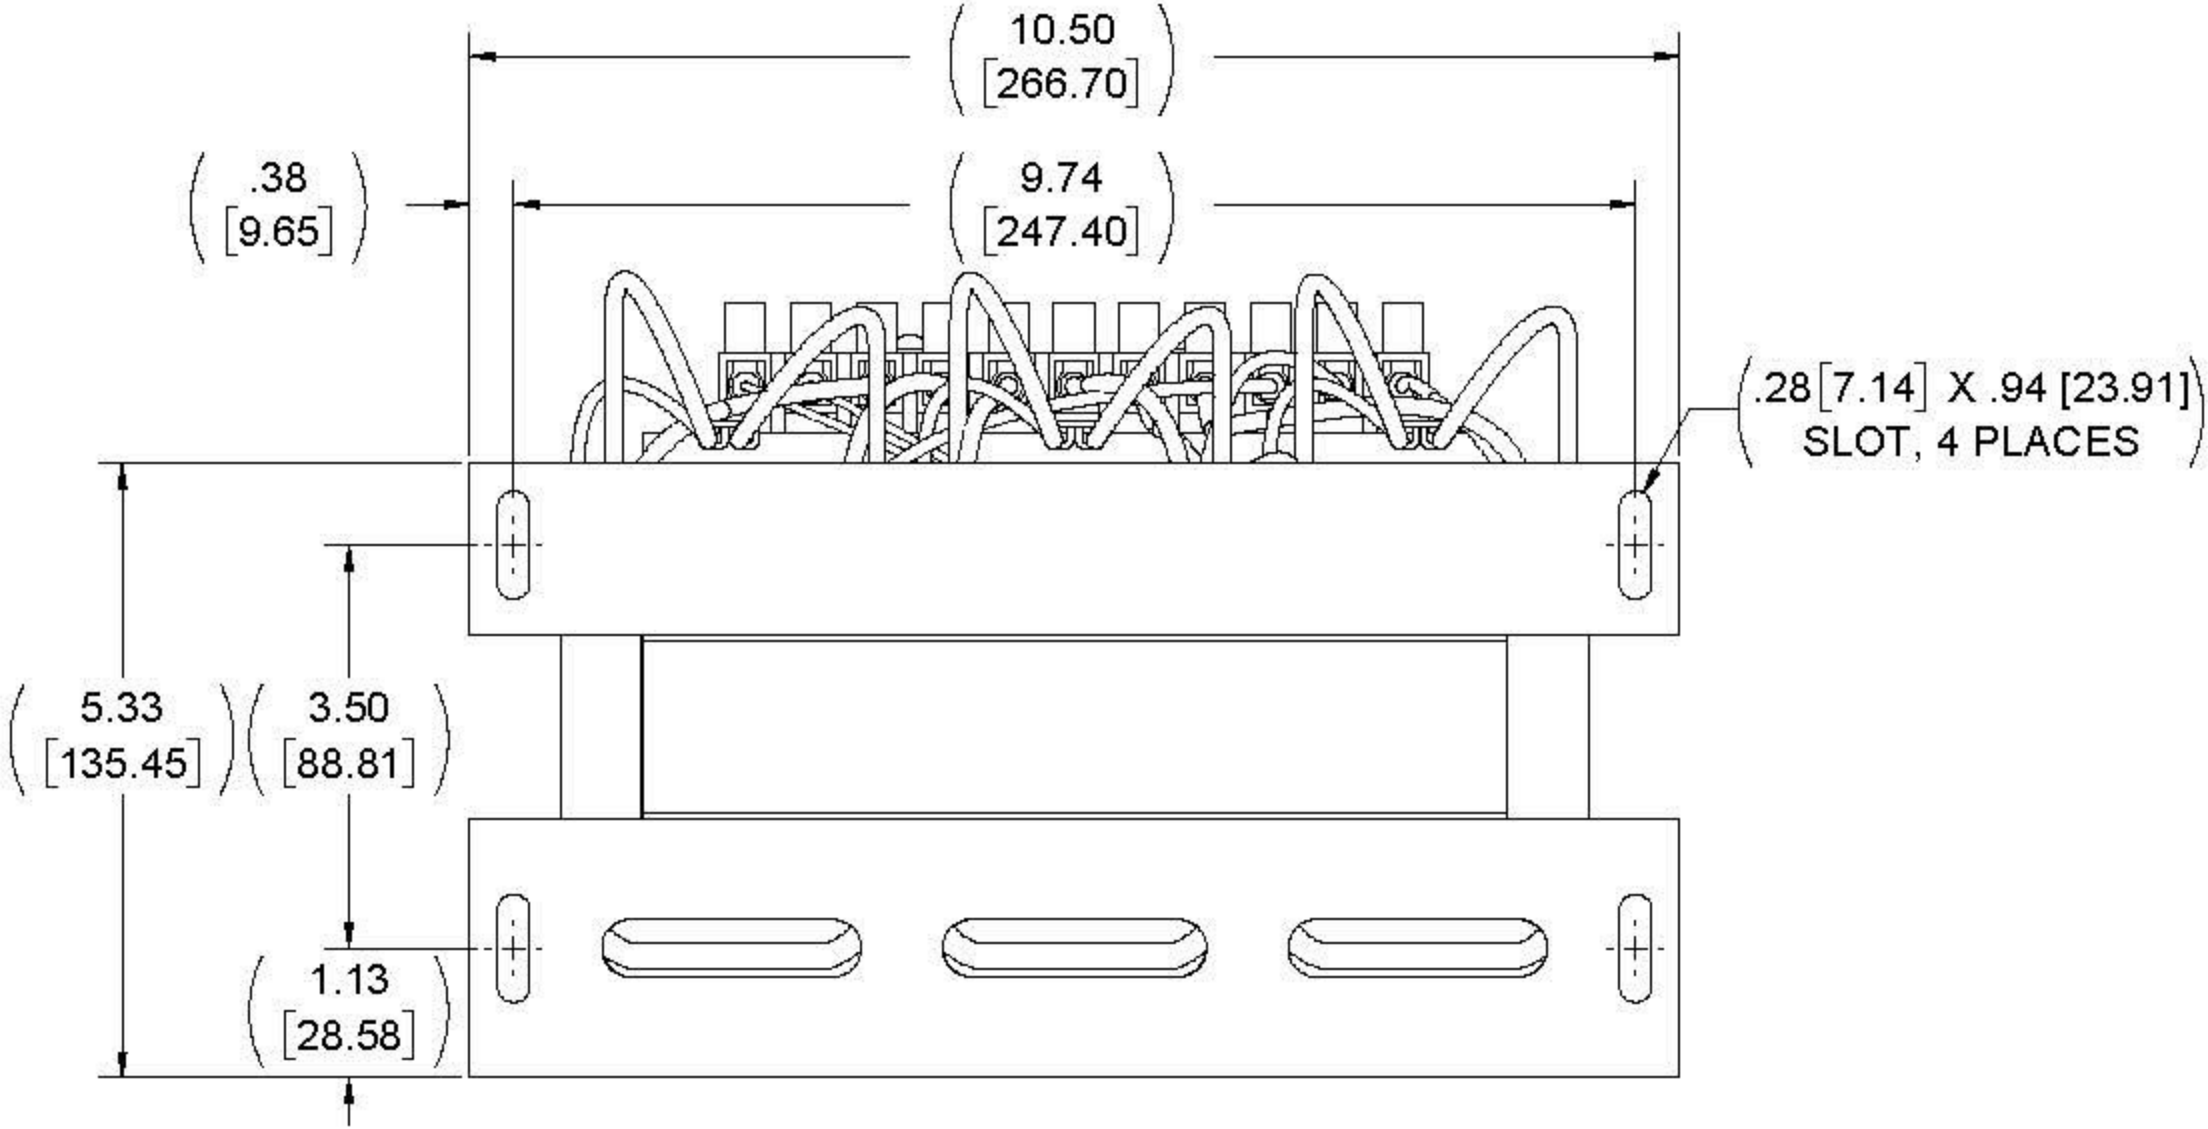


BOTTOM VIEW

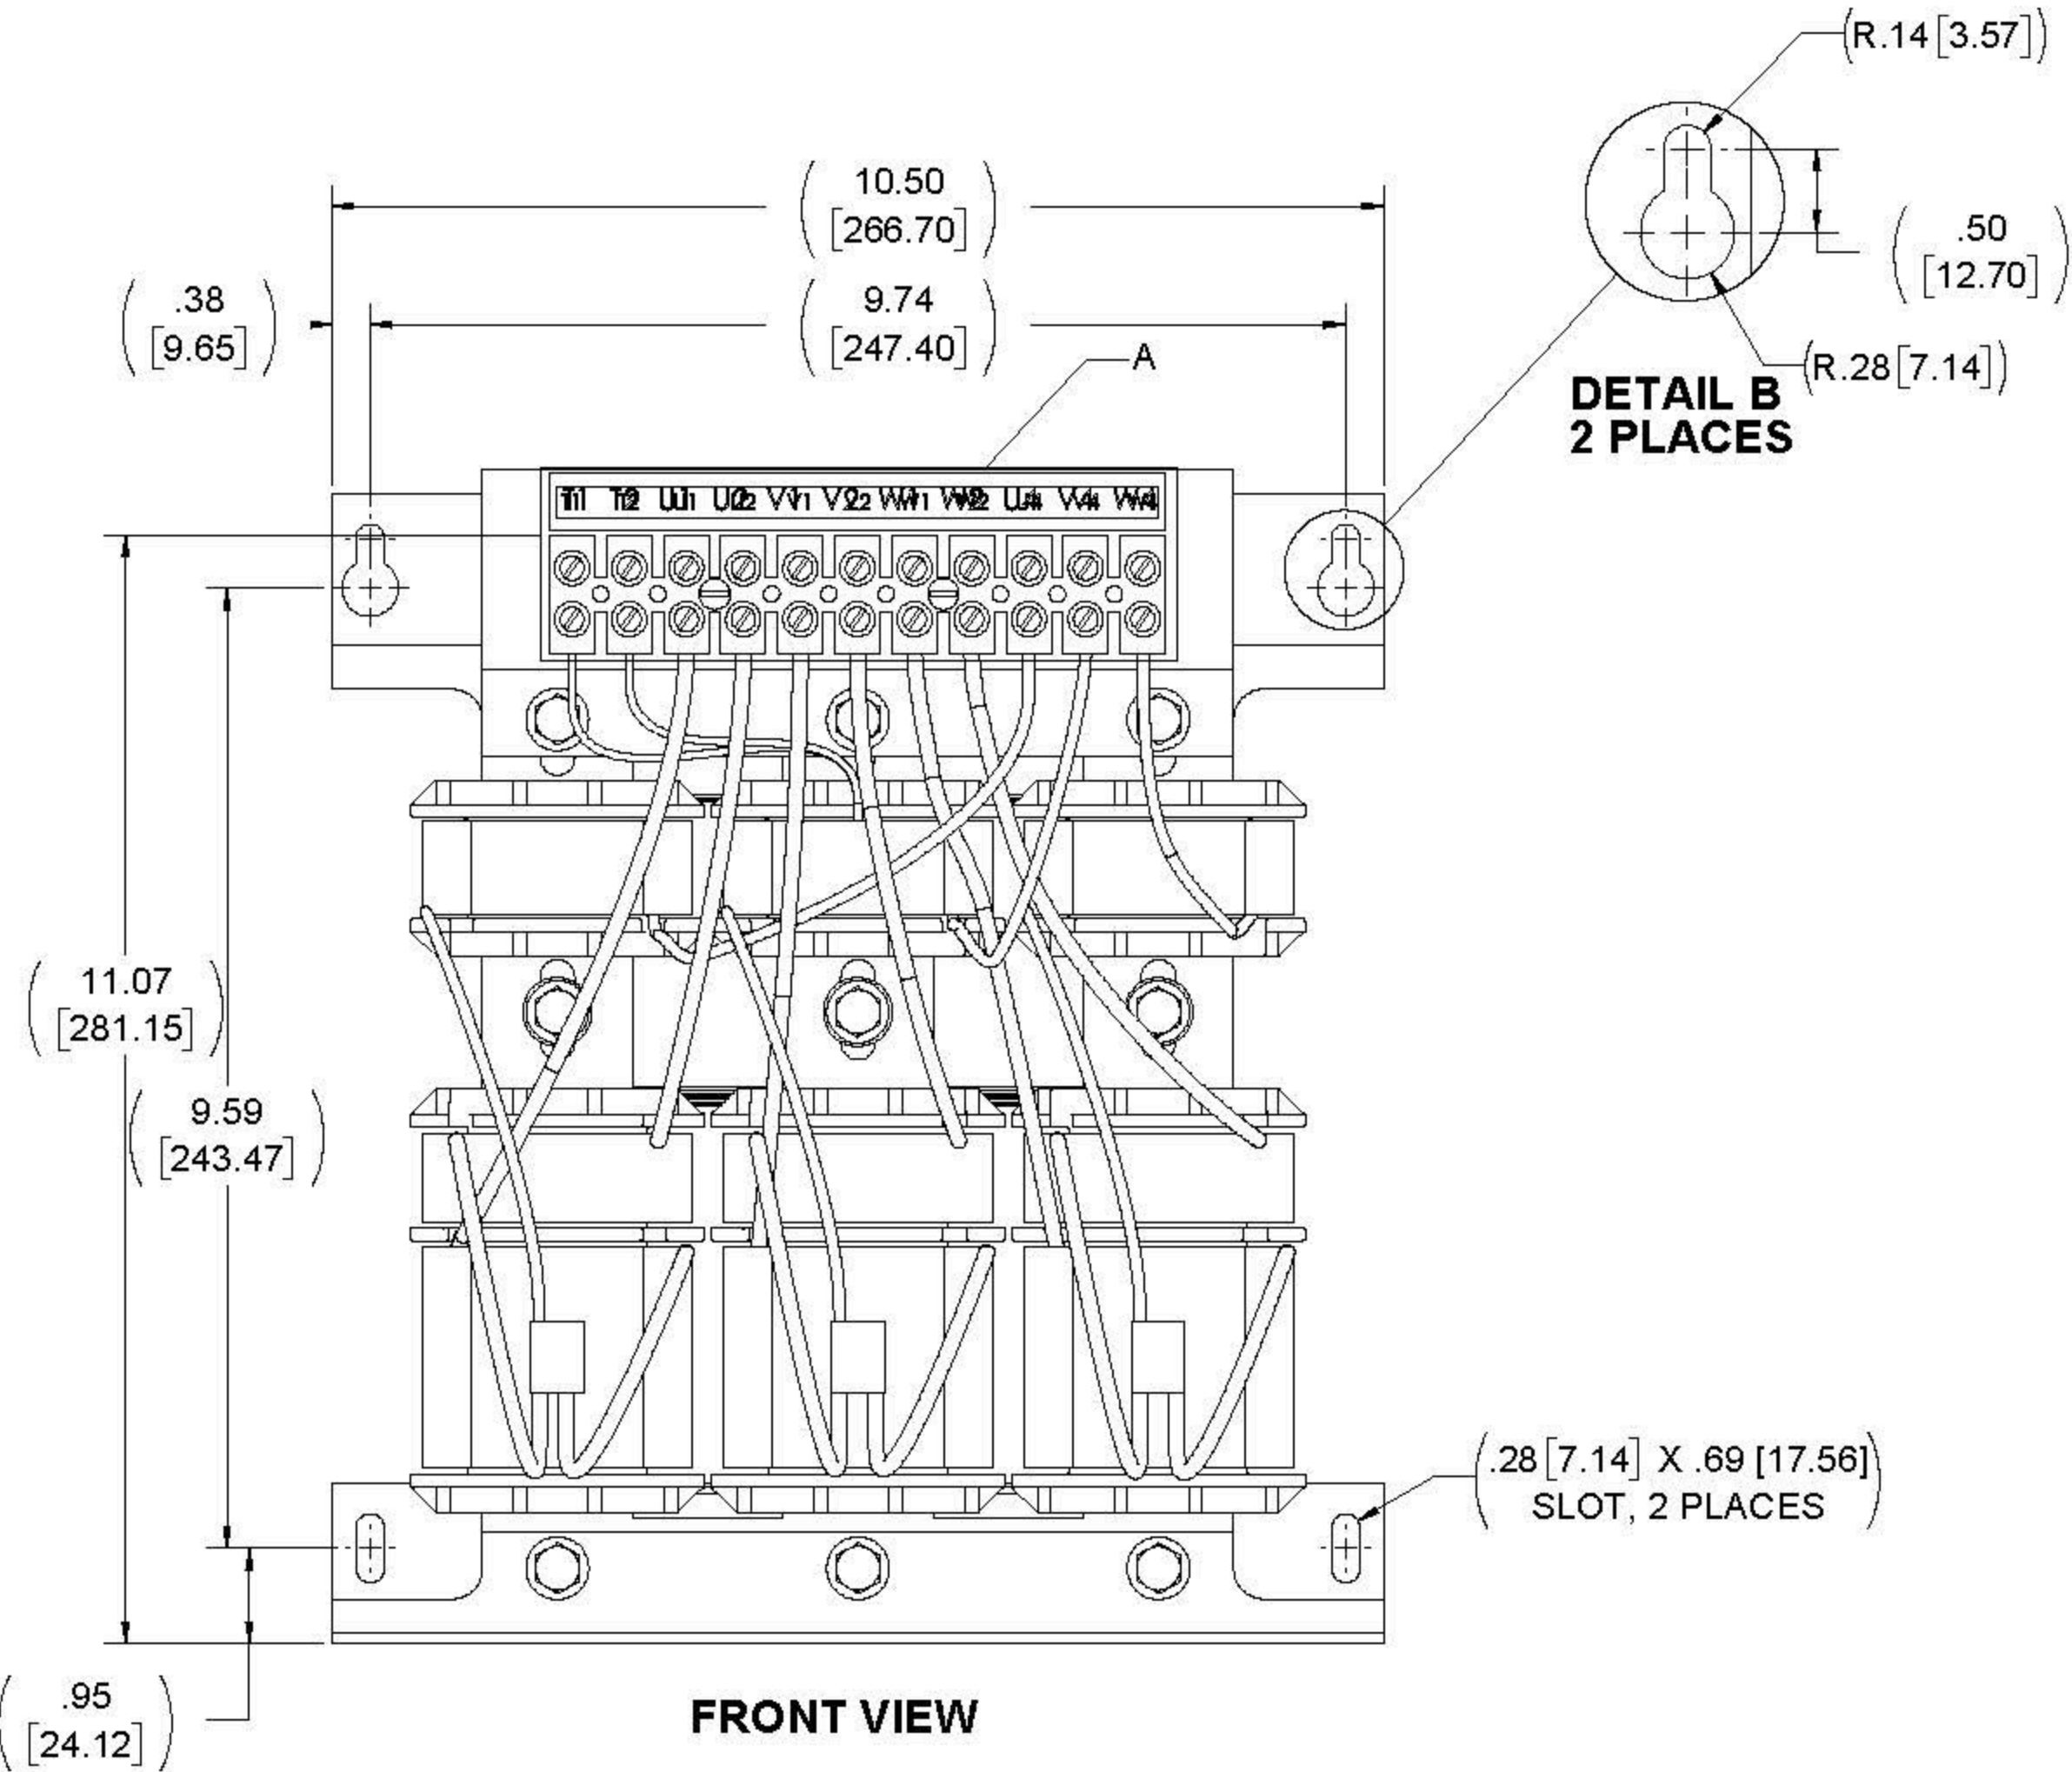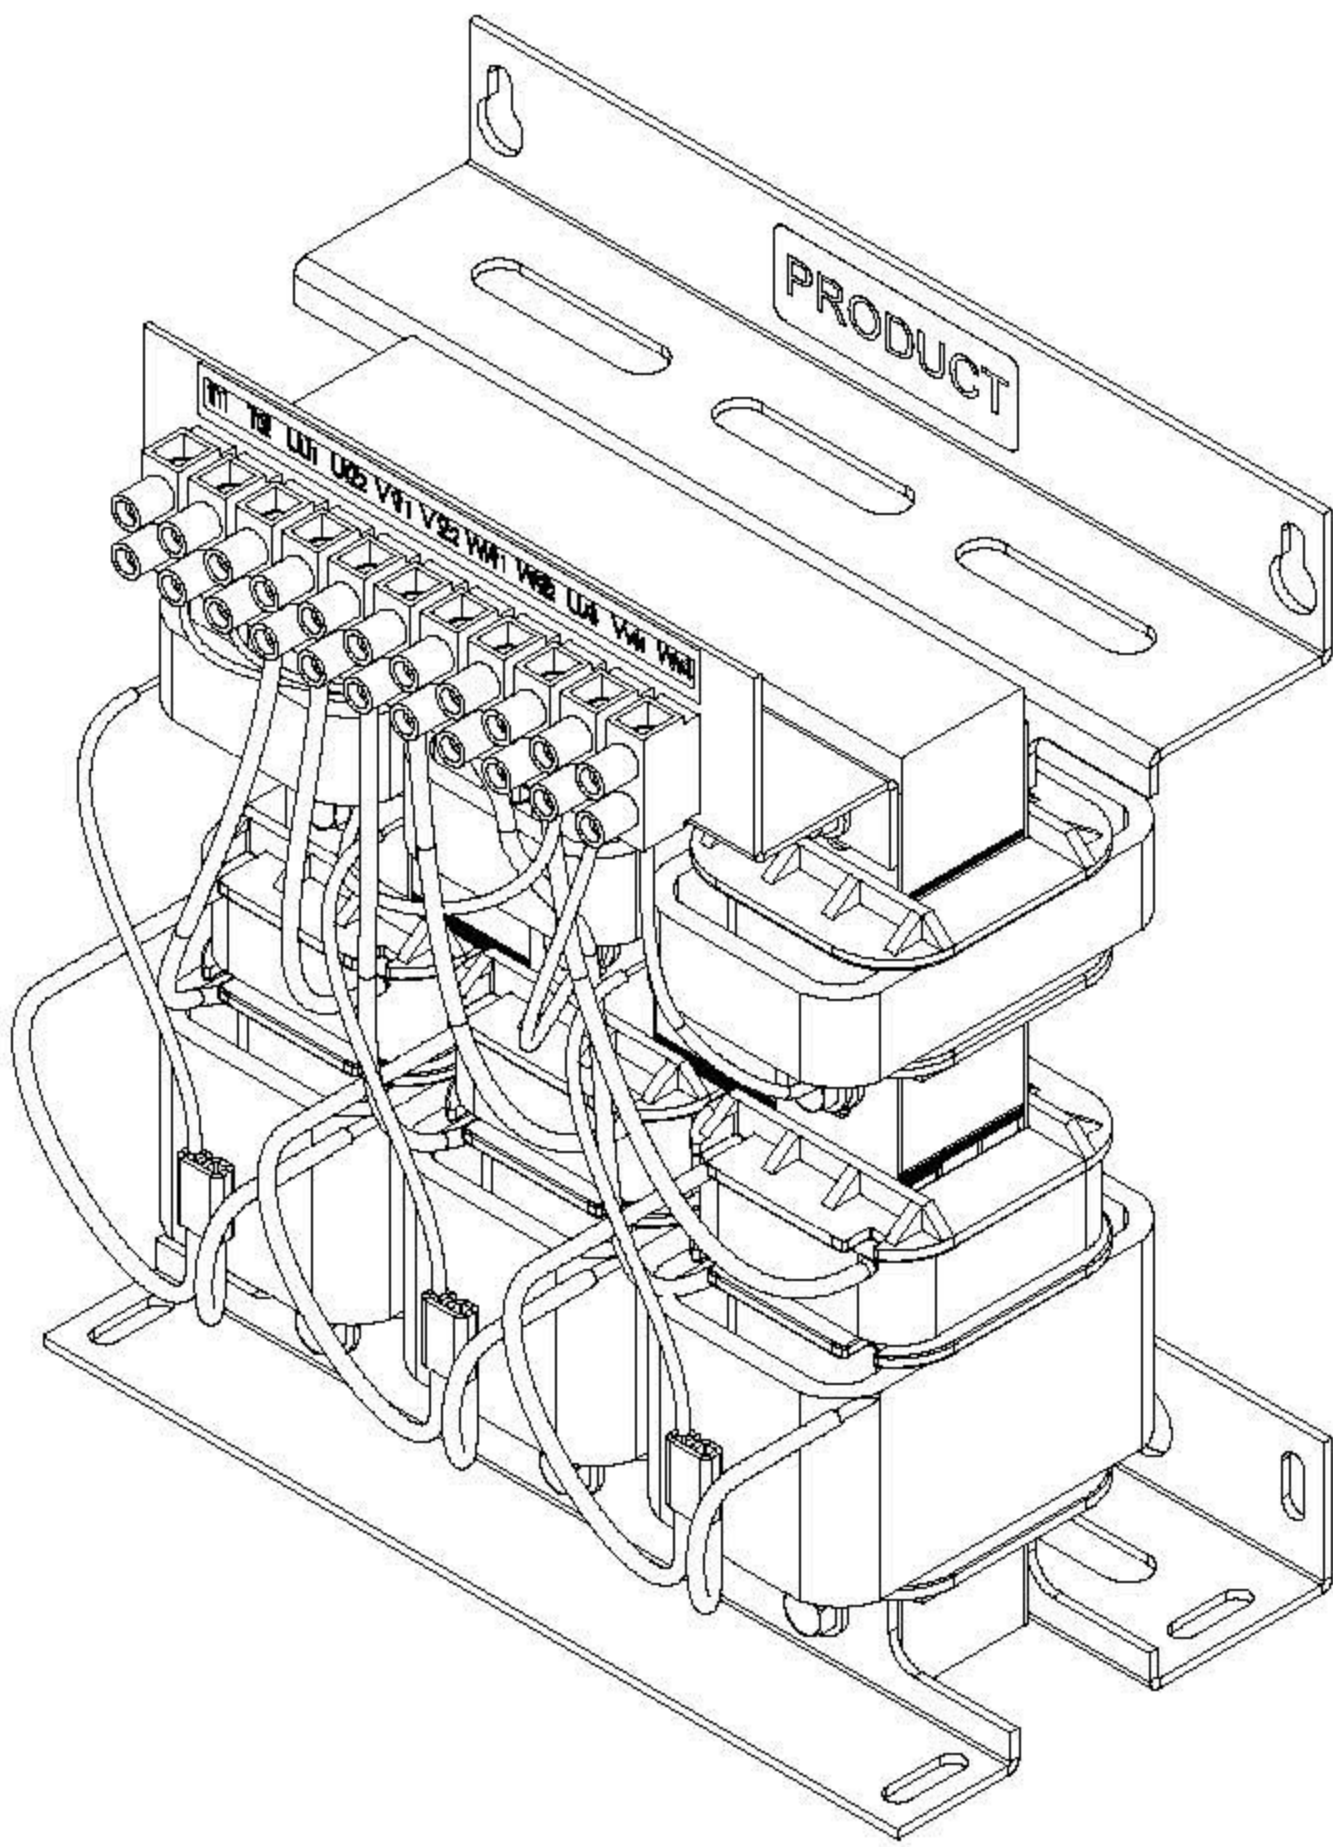

FRONT VIEW

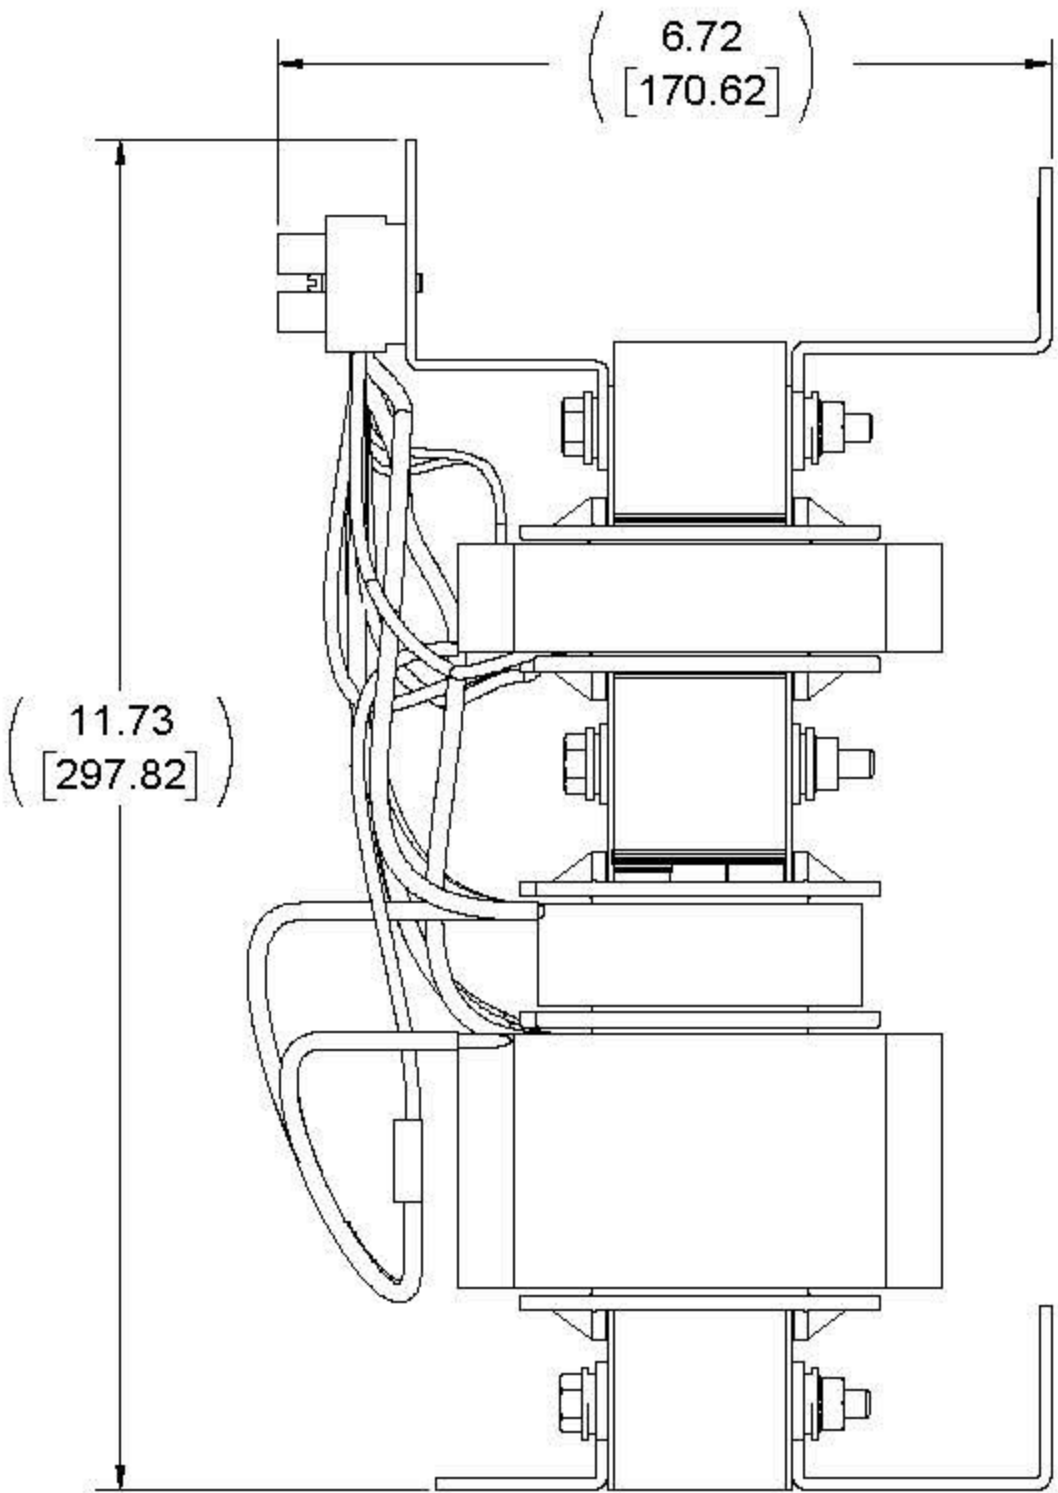

RIGHT SIDE VIEW

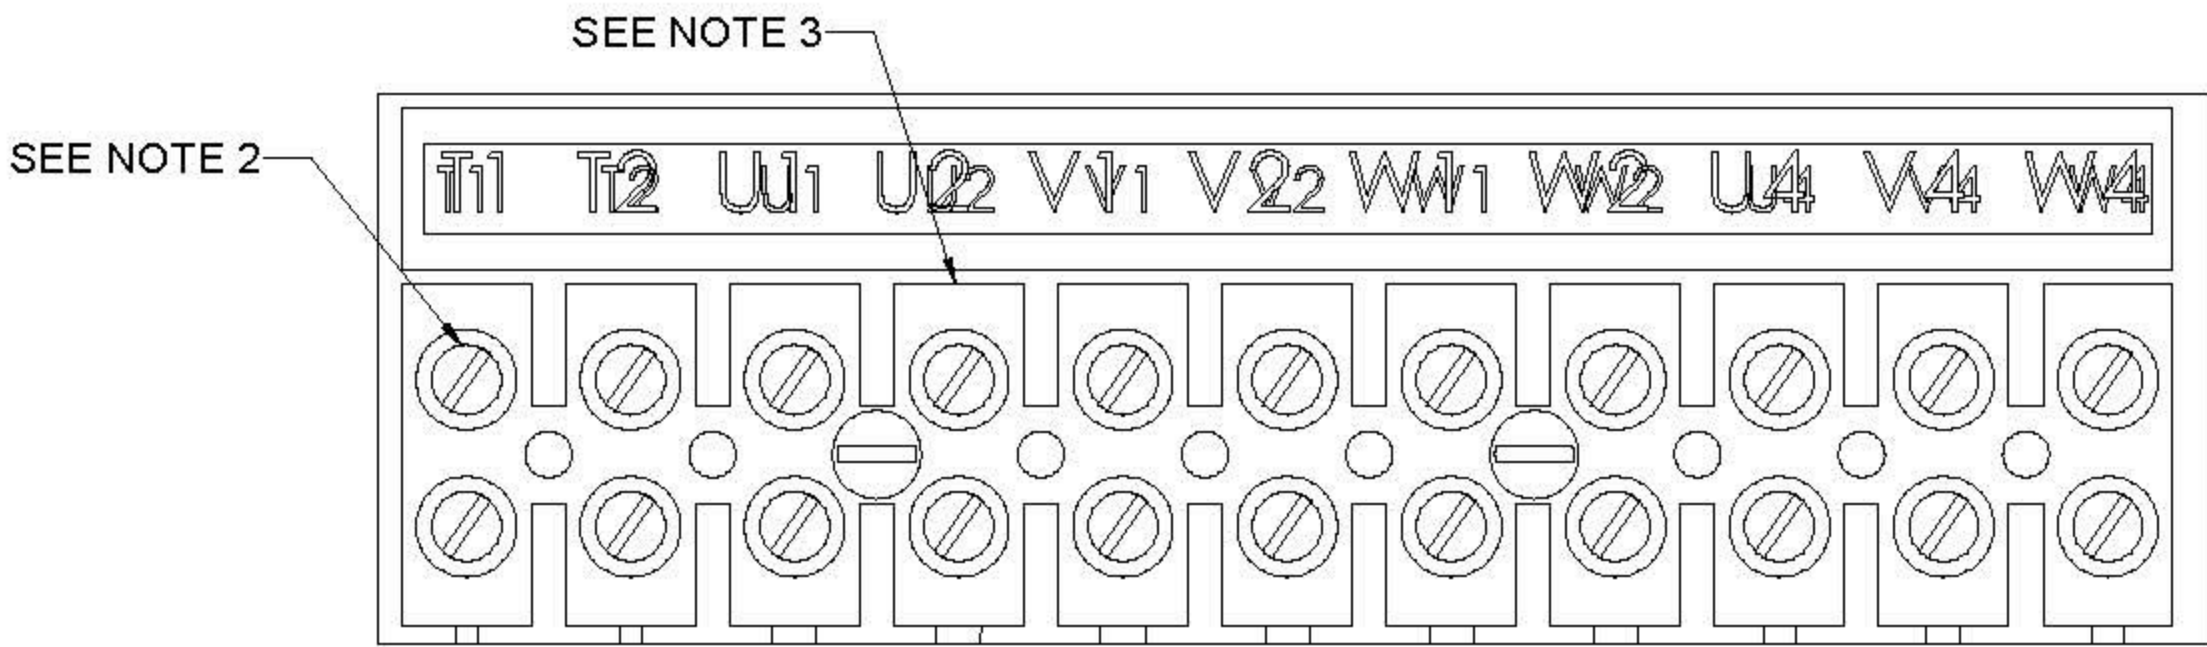

DETAIL A
CUSTOMER CONNECTION
DETAIL VIEW

NOTES:

1. FILTER REQUIRES CAPACITOR (CAP-341TP) (QTY. 1).
2. TERMINAL SCREW TIGHTENING TORQUE 16 IN/LBS, MAX.
3. WIRE RANGE 4-14 AWG.

THE COMPONENT, PART OR ASSEMBLY DESCRIBED IN THIS DOCUMENT MUST COMPLY WITH THE EU (EUROPEAN UNION) DIRECTIVE RoHS		MATERIAL		CONFIDENTIAL AND PROPRIETARY INFORMATION THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF MTE CORPORATION AND MAY NOT BE USED, COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE AUTHORIZED WRITTEN PERMISSION OF MTE CORPORATION	
CONTAINS <0.1% OF ANY SVHC BY WEIGHT PER REACH REGULATION				DESCRIPTION	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MM] TOLERANCES ARE: ANGLES: ± 1 ° 1 PLACE .X: ± .1 [2.5] 2 PLACE .XX: ± .03 [0.76] 3 PLACE .XXX: ± .010 [0.254]		DRAWN JP 05/07/12		DATE 05/07/12	
MTE AN BL POWER ELECTRONICS COMPANY		CHECKED RH 03/20/14		DATE 03/20/14	
N83 W1 3330 Leon Road Menomonee Falls, WI 53051 USA 800.455.4693 262.253.8200		APPROVED RH 03/20/14		SIZE D CD MAPP0021D	
				REV 01	
				SCALE 3/5	
				SHEET 1 OF 1	